


1389.5

KBL 6-10-D BU

KBL 6-10-D BU

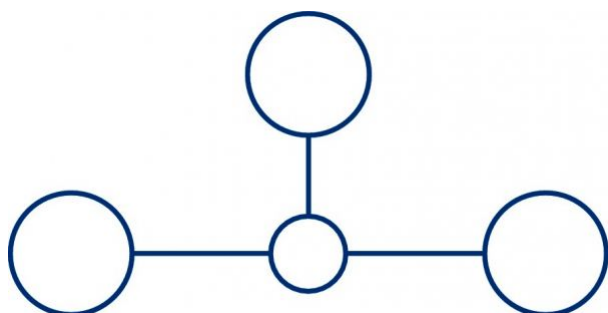

Feed-through terminal for direct mount/block variant, Screw connection, Mounting type: Mounting surface, Rated cross-section: 10 mm², Width: 8 mm, Colour: Blue

Business data

Product description	Feed-through terminal for direct mount/block variant
Packaging unit	100
Quantity unit	PC
Weight per piece (not including packaging)	13.6
Weight per piece (including packaging)	14.6
Unit of weight	G
Customs number	85369010
Country of origin	DE

1389.5

KBL 6-10-D BU

KBL 6-10-D BU

Technical Data

Dimensions

Length	48 mm
Width	8 mm
Height	36.5 mm

Ratings

Rated voltage	300 V
Rated current	55 A
Rated cross-section	10 mm ²
Rated impulse voltage	6 kV
Overvoltage category	III
Contamination degree	3

1389.5

KBL 6-10-D BU

KBL 6-10-D BU

Technical Data

Connection data

Connection principle	Screw connection
Connection position	Lateral
Connections	2
Number of terminals per level	2
Number of levels	1
Wire cross-section single-core (rigid) / stranded, min.	0.2 mm ²
Wire cross-section single core (rigid)/stranded, max.	10 mm ²
Wire cross-section stranded, min.	0.2 mm ²
Wire cross-section stranded, max.	10 mm ²
Wire cross-section stranded with wire-end ferrules, min.	0.2 mm ²
Wire cross-section stranded with wire-end ferrules, max.	10 mm ²
Wire cross-section AWG, min.	22
Wire cross-section AWG, max.	8
Stripping length	12 mm
Screw head	Slotted
Screw threading	M 4
Tightening torque, min.	1.2 Nm
Tightening torque, max.	2 Nm

1389.5

KBL 6-10-D BU

KBL 6-10-D BU

Technical Data

Materials

Insulation housing	Polyamide 6.6
--------------------	---------------

Flammability class UL 94	V-2
--------------------------	-----

Working temperature, min.	-40 °C
---------------------------	--------

Working temperature, max.	105 °C
---------------------------	--------

Further technical data

Mounting type	Mounting face
---------------	---------------

Gauge plug acc. to EN 60 947-1	A5
--------------------------------	----

Number of cross-connection channels	1
-------------------------------------	---

End plate required	✓
--------------------	---

Number of test pick-off options	1
---------------------------------	---

Datasheet



1389.5

KBL 6-10-D BU

KBL 6-10-D BU

Approvals

Standards and regulations

EAC approval	TR ZU 004/2011
--------------	----------------



EAC approval granted	✓
----------------------	---

1389.5


KBL 6-10-D BU

KBL 6-10-D BU

Media

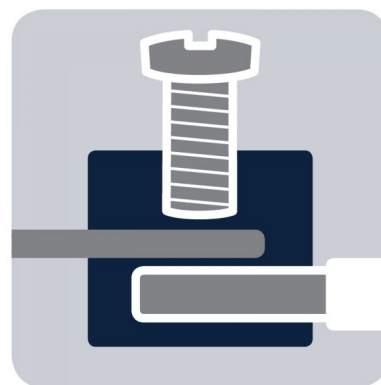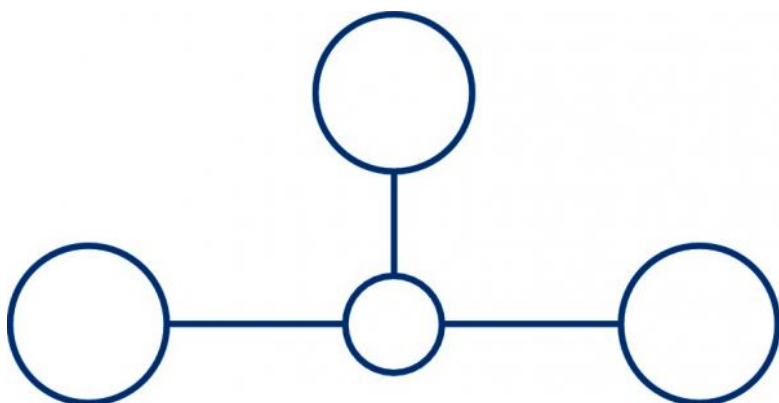

M4



EAC

1389.5

KBL 6-10-D BU

KBL 6-10-D BU

Accessories

Cover



Cover, Length: 26.5 mm, Width: 8 mm, Colour: White

In general

Order number	Article designation	GTIN (EAN)	Packaging unit
2966.0	AD 1/8	4044211056957	50 PC



Cover, Length: 26.5 mm, Width: 8 mm, Colour: Yellow

In general

Order number	Article designation	GTIN (EAN)	Packaging unit
2954.0	AD 1/8/B	4044211056827	50 PC

1389.5

KBL 6-10-D BU

KBL 6-10-D BU

Accessories

Cover




Cover, Length: 32 mm, Width: 1.3 mm, Colour: Yellow

In general

Order number	Article designation	GTIN (EAN)	Packaging unit
2054.0	AD 4/32/B	4044211048600	50 PC

External insulated cross-connector



External insulated cross-connector, No. of poles: 2, Mounting type: Plug in, Width: 16.1 mm, Rated current: 27 A; Colour: Yellow

In general

Order number	Article designation	GTIN (EAN)	Packaging unit
2067.0	AQI 2/8/11	4044211048730	50 PC


1389.5

KBL 6-10-D BU

KBL 6-10-D BU

Accessories


External insulated cross-connector



External insulated cross-connector, No. of poles: 3,
Mounting type: Plug in, Width: 24.2 mm, Rated
current: 27 A; Colour: Yellow

In general

Order number	Article designation	GTIN (EAN)	Packaging unit
2068.0	AQI 3/8/11	4044211048747	50 PC

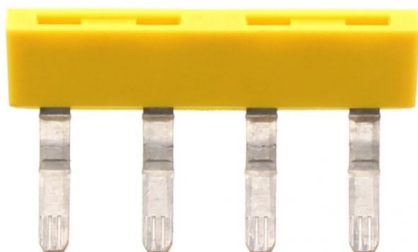

External insulated cross-connector, No. of poles: 4,
Mounting type: Plug in, Width: 32.3 mm, Rated
current: 27 A; Colour: Yellow

In general

Order number	Article designation	GTIN (EAN)	Packaging unit
2069.0	AQI 4/8/11	4044211048754	50 PC


1389.5

KBL 6-10-D BU

KBL 6-10-D BU

Accessories

End holder



End support, Mounting type: Mounting surface, Width: 8 mm, Colour: Beige

In general

Order number	Article designation	GTIN (EAN)	Packaging unit
2180.2	EH 4	4044211050023	50 PC

Cross connector



Cross-connector, No. of poles: 10, Mounting type: Can be screwed on, Width: 78.9 mm, Rated cross-section: 10 mm², Colour: natural

In general

Order number	Article designation	GTIN (EAN)	Packaging unit
2063.0	Q 10	4044211048693	10 PC


1389.5

KBL 6-10-D BU

KBL 6-10-D BU

Accessories


Cross connector



Cross-connector, No. of poles: 2, Mounting type: Can be screwed on, Width: 14.1 mm, Rated cross-section: 10 mm², Colour: natural

In general

Order number	Article designation	GTIN (EAN)	Packaging unit
2060.0	Q 2	4044211048662	50 PC



Cross-connector, No. of poles: 3, Mounting type: Can be screwed on, Width: 22.2 mm, Rated cross-section: 10 mm², Colour: natural

In general

Order number	Article designation	GTIN (EAN)	Packaging unit
2061.0	Q 3	4044211048679	50 PC


1389.5

KBL 6-10-D BU

KBL 6-10-D BU

Accessories

Cross connector




Cross-connector, No. of poles: 4, Mounting type: Can be screwed on, Width: 30.3 mm, Rated cross-section: 10 mm², Colour: natural

In general

Order number	Article designation	GTIN (EAN)	Packaging unit
2062.0	Q 4	4044211048686	20 PC

Insulated cross connector

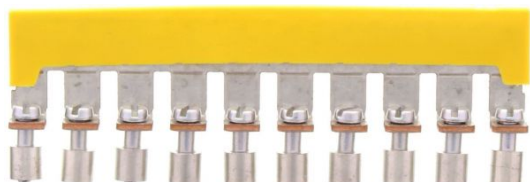

Insulated cross-connector, No. of poles: 10, Mounting type: Can be screwed on, Width: 78.4 mm, Colour: Yellow

In general

Order number	Article designation	GTIN (EAN)	Packaging unit
2753.2	QI 10	4044211054892	10 PC

1389.5

KBL 6-10-D BU

KBL 6-10-D BU

Accessories

Insulated cross connector



Insulated cross-connector, No. of poles: 2, Mounting type: Can be screwed on, Width: 13.6 mm, Colour: Yellow

In general

Order number	Article designation	GTIN (EAN)	Packaging unit
2750.2	QI 2	4044211054861	50 PC



Insulated cross-connector, No. of poles: 3, Mounting type: Can be screwed on, Width: 21.7 mm, Colour: Yellow

In general

Order number	Article designation	GTIN (EAN)	Packaging unit
2751.2	QI 3	4044211054878	50 PC


1389.5

KBL 6-10-D BU

KBL 6-10-D BU

Accessories

Insulated cross connector




Insulated cross-connector, No. of poles: 4, Mounting type: Can be screwed on, Width: 28.8 mm, Colour: Yellow

In general

Order number	Article designation	GTIN (EAN)	Packaging unit
2752.2	QI 4	4044211054885	20 PC

Quick-marking



Terminal marker / Pocket Maxicard, Length: 5 mm, Width: 8 mm, Colour: White

In general

Order number	Article designation	GTIN (EAN)	Packaging unit
9323.7	PMC SB 8/40 WH	4044211129231	400 PC

1389.5

KBL 6-10-D BU

KBL 6-10-D BU

Accessories

Screw driver



Screwdriver with bare blade, Colour: Black-grey

In general

Order number	Article designation	GTIN (EAN)	Packaging unit
1087.0	SDB 0,8x4,0	4044211014803	1 PC
