



15305.2

SD-S 37CZ

SD-S 37CZ

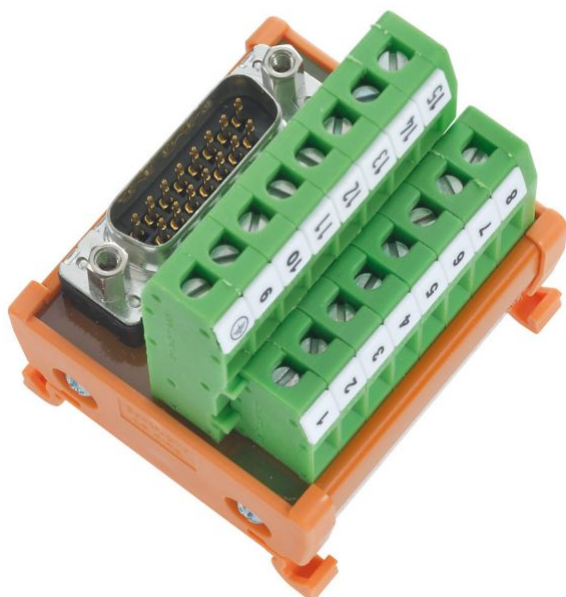

Interface module for D-SUB, Tension-spring connection and male D-SUB plug-in connector, Mounting type: Mounting rail TS 35, No. of poles: 37

Business data

| | |
|--|------------------|
| Product description | Interface module |
| Packaging unit | 1 |
| Quantity unit | PC |
| Weight per piece (not including packaging) | 91.9 |
| Weight per piece (including packaging) | 134.8 |
| Unit of weight | G |
| Customs number | 85369010 |
| Country of origin | EEC |

15305.2

SD-S 37CZ

SD-S 37CZ

Technical Data

Dimensions

| | |
|------------------|--------|
| Length | 47 mm |
| Width | 107 mm |
| Height TS 35/7.5 | 38 mm |

Ratings

| | |
|----------------------|-----|
| Overvoltage category | III |
| Contamination degree | 2 |

Connection data

| | |
|--|---------------------------|
| Connection principle | Tension-spring connection |
| Number of connections | 1 |
| No. of poles | 37 |
| Wire cross-section single core (rigid), min. | 0.08 mm ² |
| Wire cross-section single-core (rigid), max. | 2.5 mm ² |
| Wire cross-section stranded, min. | 0.14 mm ² |
| Wire cross-section stranded, max. | 2.5 mm ² |
| Wire cross-section stranded with wire-end ferrules, min. | 0.14 mm ² |
| Wire cross-section stranded with wire-end ferrules, max. | 1.5 mm ² |

15305.2

SD-S 37CZ

SD-S 37CZ

Technical Data

Connection data

| | |
|------------------|------|
| Stripping length | 6 mm |
|------------------|------|

Input data

| | |
|------------------------------|-------|
| Max. operating voltage AC/DC | 125 V |
|------------------------------|-------|

| | |
|--------------------------------|-------|
| Current load per channel, max. | 1,5 A |
|--------------------------------|-------|

Materials

| | |
|---------------------------|--------|
| Working temperature, min. | -20 °C |
|---------------------------|--------|

| | |
|---------------------------|-------|
| Working temperature, max. | 50 °C |
|---------------------------|-------|

Further technical data

| | |
|----------------|-----------------|
| Connector type | D-sub male plug |
|----------------|-----------------|

| | |
|--------------|---------|
| Test voltage | 0.67 kV |
|--------------|---------|

| | |
|----------|---|
| Shielded | ✓ |
|----------|---|

15305.2

SD-S 37CZ

SD-S 37CZ

Approvals

Standards and regulations

Standards / specifications

DIN VDE 0110 / EN 50178

15305.2

SD-S 37CZ

SD-S 37CZ

Media

