

1565.2

RK 16/35 N/PE BKYE

RK 16/35 N/PE BKYE



Feed-through terminal, Screw connection, Mounting type: Mounting rail TS 35/7.5, Rated cross-section: 16 mm², Width: 12 mm, Colour: Black-yellow

Business data

Product description	Feed-through terminal
Packaging unit	50
Quantity unit	PC
Weight per piece (not including packaging)	27
Weight per piece (including packaging)	28.44
Unit of weight	G
Customs number	85369010
Country of origin	DE

1565.2

RK 16/35 N/PE BKYE

RK 16/35 N/PE BKYE

Technical Data

Dimensions

Length	54 mm
Width	12 mm
Height TS 35/7.5	47 mm

Ratings

Rated voltage	800 V
Rated current	76 A
Rated cross-section	16 mm ²
Rated impulse voltage	8 kV
Overvoltage category	III
Contamination degree	3

1565.2

RK 16/35 N/PE BKYE

RK 16/35 N/PE BKYE

Technical Data

Connection data

Connection principle	Screw connection
Connection position	Lateral
Connections	2
Number of terminals per level	2
Number of levels	1
Wire cross-section single-core (rigid) / stranded, min.	2.5 mm ²
Wire cross-section single core (rigid)/stranded, max.	25 mm ²
Wire cross-section stranded, min.	2.5 mm ²
Wire cross-section stranded, max.	16 mm ²
Wire cross-section stranded with wire-end ferrules, min.	2.5 mm ²
Wire cross-section stranded with wire-end ferrules, max.	16 mm ²
Wire cross-section AWG, min.	10
Wire cross-section AWG, max.	6
Stripping length	15 mm
Screw head	Slotted
Screw threading	M 5
Tightening torque, min.	2 Nm
Tightening torque, max.	4 Nm

1565.2

RK 16/35 N/PE BKYE

RK 16/35 N/PE BKYE

Technical Data

Materials

Insulation housing	Polyamide 6.6
--------------------	---------------

Flammability class UL 94	V-2
--------------------------	-----

Working temperature, min.	-40 °C
---------------------------	--------

Working temperature, max.	105 °C
---------------------------	--------

Further technical data

Mounting type	Mounting rail TS 35/7,5
---------------	-------------------------

Gauge plug acc. to EN 60 947-1	B7
--------------------------------	----

Number of cross-connection channels	1
-------------------------------------	---

1565.2

RK 16/35 N/PE BKYE

RK 16/35 N/PE BKYE

Approvals

Standards and regulations

EAC approval	TR ZU 004/2011
--------------	----------------

EAC approval granted	✓
----------------------	---

CSA approval

CSA approval	C22.2 No 158
--------------	--------------

CSA approval granted	✓
----------------------	---

CSA Usegroup C: rated voltage	600 V
-------------------------------	-------

CSA Usegroup C: rated current	85 A
-------------------------------	------

CSA wire cross-section AWG, min.	12
----------------------------------	----

CSA wire cross-section AWG, max.	4
----------------------------------	---

CSA stripping length	15 mm
----------------------	-------

CSAus approval

CSAus approval	UL 1059
----------------	---------

CSAus approval granted	✓
------------------------	---

CSAus Usegroup C: rated voltage	600 V
---------------------------------	-------

CSAus Usegroup C: rated current	85 A
---------------------------------	------

CSAus wire cross-section AWG, min.	12
------------------------------------	----

1565.2

RK 16/35 N/PE BKYE

RK 16/35 N/PE BKYE

Approvals

CSAus approval

CSAus wire cross-section AWG, max.	4
CSAus stripping length	15 mm

cUL Recognized

cUL Recognized	C22.2 No 158
cUL Recognized	✓
cUL Usegroup C: rated voltage	600 V
cUL Usegroup C: rated current	85 A
cUL wire cross-section single-core (rigid) AWG, min.	10
cUL wire cross-section single-core (rigid) AWG, max.	4
cUL wire cross-section stranded AWG, min.	10
cUL wire cross-section stranded AWG, max.	4
cUL torque	20 Nm
cUL wire material	Cu

1565.2

RK 16/35 N/PE BKYE

RK 16/35 N/PE BKYE

Approvals

German Lloyd approval

GL approval	IEC 60947-7-1
GL approval granted	✓
GL rated voltage	800 V
GL rated current	76 A
GL rated cross-section	16 mm ²
GL environmental category	C

KEMA KEUR approval

KEMA KEUR approval	EN 60947-7-1
KEMA KEUR approval granted	✓
KEMA rated voltage	800 V
KEMA rated current	76 A
KEMA rated impulse voltage	8 kV
KEMA wire cross-section single core (rigid), min.	2.5 mm ²
KEMA wire cross-section single-core (rigid), max.	25 mm ²
KEMA wire cross-section stranded, min.	2.5 mm ²
KEMA wire cross-section stranded, max.	16 mm ²

1565.2

RK 16/35 N/PE BKYE

RK 16/35 N/PE BKYE

Approvals

UL Recognized


UL Recognized	UL 1059
UL Recognized granted	✓
UL Usegroup C: rated voltage	600 V
UL Usegroup C: rated current	85 A
UL wire cross-section single-core (rigid) AWG, min.	10
UL wire cross-section single-core (rigid) AWG, max.	4
UL wire cross-section stranded AWG, min.	10
UL wire cross-section stranded AWG, max.	4
UL torque	20 Lb In
UL wire material	Cu
UL factory wiring	✓
UL field wiring	✓

1565.2


RK 16/35 N/PE BKYE

RK 16/35 N/PE BKYE


Media

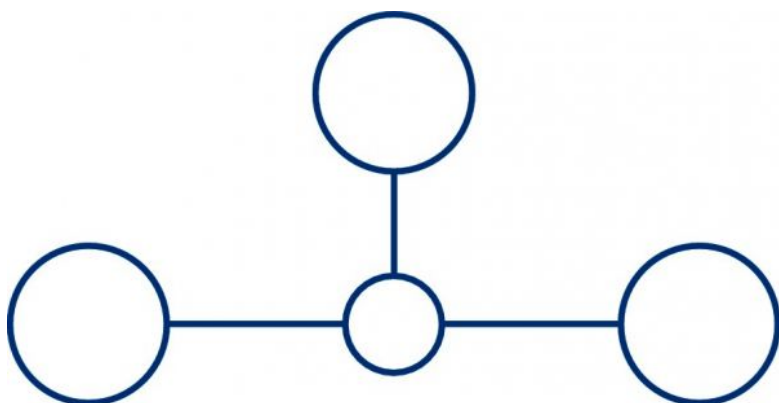

M5



EAC

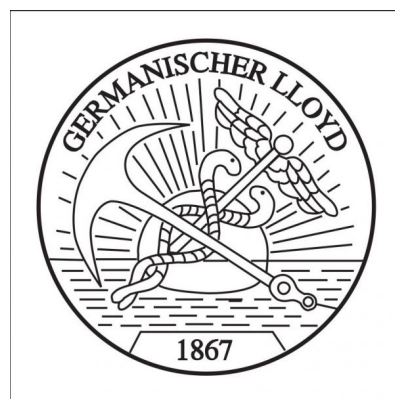

1565.2

RK 16/35 N/PE BKYE

RK 16/35 N/PE BKYE

Media



1565.2

RK 16/35 N/PE BKYE

RK 16/35 N/PE BKYE

Accessories

Cover



Cover, Length: 26.5 mm, Width: 12 mm, Colour: Yellow

In general

Order number	Article designation	GTIN (EAN)	Packaging unit
2955.0	AD 1/12/N/B	4044211056834	20 PC



Cover, Length: 26.5 mm, Width: 12 mm, Colour: White

In general

Order number	Article designation	GTIN (EAN)	Packaging unit
2967.0	AD 1/12/N	4044211056964	20 PC

1565.2

RK 16/35 N/PE BKYE

RK 16/35 N/PE BKYE

Accessories

End bracket



End stop, Mounting type: Mounting rail TS 35/7.5,
Width: 9.5 mm, Colour: Beige

In general

Order number	Article designation	GTIN (EAN)	Packaging unit
2828.0	ES 35/K/ST	4044211055547	50 PC

Cross connector



Cross-connector, No. of poles: 10, Mounting type: Can
be screwed on, Width: 115.3 mm, Rated cross-
section: 16 mm², Colour: natural

In general

Order number	Article designation	GTIN (EAN)	Packaging unit
2266.0	Q 10	4044211050757	10 PC


1565.2

RK 16/35 N/PE BKYE

RK 16/35 N/PE BKYE

Accessories

Cross connector



Cross-connector, No. of poles: 2, Mounting type: Can be screwed on, Width: 20.1 mm, Rated cross-section: 16 mm², Colour: natural

In general

Order number	Article designation	GTIN (EAN)	Packaging unit
2257.0	Q 2	4044211050702	20 PC



Cross-connector, No. of poles: 3, Mounting type: Can be screwed on, Width: 32 mm, Rated cross-section: 16 mm², Colour: natural

In general

Order number	Article designation	GTIN (EAN)	Packaging unit
2258.0	Q 3	4044211050719	20 PC

1565.2

RK 16/35 N/PE BKYE

RK 16/35 N/PE BKYE

Accessories

Cross connector




Cross-connector, No. of poles: 4, Mounting type: Can be screwed on, Width: 43.9 mm, Rated cross-section: 16 mm², Colour: natural

In general

Order number	Article designation	GTIN (EAN)	Packaging unit
2265.0	Q 4	4044211050740	10 PC

Quick-marking



Terminal marker / Pocket Maxicard, Length: 5 mm, Width: 6 mm, Colour: White

In general

Order number	Article designation	GTIN (EAN)	Packaging unit
4702.7	PMC SB 6/50 WH	4044211089986	500 PC

1565.2

RK 16/35 N/PE BKYE

RK 16/35 N/PE BKYE

Accessories

Screw driver



Screwdriver with bare blade, Colour: Black-grey

In general

Order number	Article designation	GTIN (EAN)	Packaging unit
1087.0	SDB 0,8x4,0	4044211014803	1 PC
