


17000.2

HSK 16/M5 B BG

HSK 16/M5 B BG

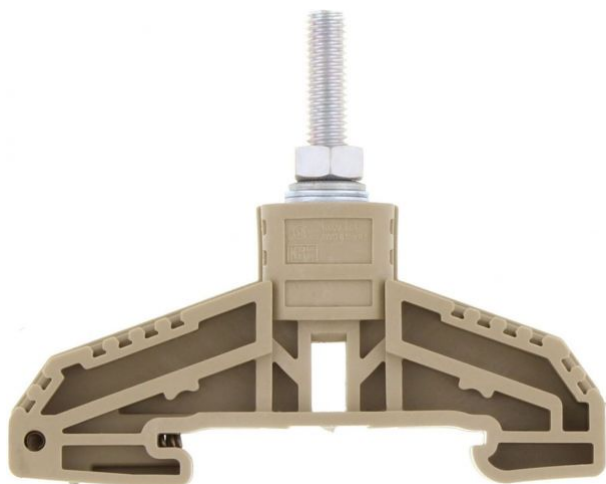

High-power stud terminal, Stud connection, Mounting type: Mounting rail TS 35/7.5, Rated cross-section: 16 mm², Width: 13 mm, Colour: Beige

Business data

Product description	High-power stud terminal
Packaging unit	10
Quantity unit	PC
Weight per piece (not including packaging)	18.5
Weight per piece (including packaging)	22.12
Unit of weight	G
Customs number	85369010
Country of origin	DE

17000.2

HSK 16/M5 B BG

HSK 16/M5 B BG

Technical Data

Dimensions

Length	67 mm
Length with TW/ADH	67 mm
Width	13 mm
Height TS 35/7.5	55.5 mm
Height TS 35/7.5 with TW/ADH	58 mm

Ratings

Rated voltage	1000 V
Rated current	76 A
Rated cross-section	16 mm ²
Rated impulse voltage	8 kV
Overvoltage category	III
Contamination degree	3

17000.2

HSK 16/M5 B BG

HSK 16/M5 B BG

Technical Data

Connection data

Connection principle	Stud connection
Connection position	Top
Connections	1
Number of terminals per level	1
Number of levels	1
Wire cross-section AWG, min.	10
Wire cross-section AWG, max.	1/0
Bolt head	Hexagon
Bolt thread	M 5
Tightening torque, min.	2 Nm
Tightening torque, max.	4 Nm
Contact wire range	≤ 16 mm ²

Materials

Insulation housing	Polyamide 6.6
Flammability class UL 94	V-0
Working temperature, min.	-40 °C
Working temperature, max.	120 °C

17000.2

HSK 16/M5 B BG

HSK 16/M5 B BG

Technical Data

Further technical data

Mounting type	Mounting rail TS 35/7,5
Number of cross-connection channels	1
DIN 46234 / 1 cable lug per side, min.	0.1 mm ²
DIN 46234 / 1 cable lug per side, max.	16 mm ²
DIN 46234 / 2 cable lugs per side, min.	0.1 mm ²
DIN 46234 / 2 cable lugs per side, max.	16 mm ²
DIN 46235: 1 cable lug per side, max.	10 mm ²
DIN 46235: 1 cable lug per side, min.	6 mm ²
DIN 46235: 2 cable lugs per side, min.	6 mm ²
DIN 46235: 2 cable lugs per side, max.	10 mm ²

17000.2

HSK 16/M5 B BG

HSK 16/M5 B BG

Approvals

Standards and regulations

EAC approval	TR ZU 004/2011
--------------	----------------

EAC approval granted	✓
----------------------	---

CSA approval

CSA approval	C22.2 No 158
--------------	--------------

CSA approval granted	✓
----------------------	---

CSA Usegroup C: rated voltage	1000 V
-------------------------------	--------

CSA Usegroup C: rated current	60 A
-------------------------------	------

CSA Usegroup D: rated voltage	1000 V
-------------------------------	--------

CSA Usegroup D: rated current	60 A
-------------------------------	------

CSA wire cross-section AWG, max.	8
----------------------------------	---

CSA torque, max.	8.5 Nm
------------------	--------

17000.2

HSK 16/M5 B BG

HSK 16/M5 B BG

Approvals

CSAus approval

CSAus approval	UL 1059
CSAus approval granted	✓
CSAus Usegroup C: rated voltage	1000 V
CSAus Usegroup C: rated current	60 A
CSAus Usegroup D: rated voltage	1000 V
CSAus Usegroup D: rated current	60 A
CSAus wire cross-section AWG, max.	8
CSAus torque, max.	8.5 Nm

cUL Recognized

cUL Recognized	C22.2 No 158
cUL Recognized	✓
cUL Usegroup E: rated voltage	1000 V
cUL Usegroup E: rated current	60 A
cUL wire cross-section AWG, max.	6
cUL torque, max.	8.5 Nm
cUL wire material	Cu

17000.2

HSK 16/M5 B BG

HSK 16/M5 B BG

Approvals

KEMA KEUR approval

KEMA KEUR approval	EN 60947-7-1
--------------------	--------------

KEMA KEUR approval granted	✓
----------------------------	---

KEMA rated voltage	1000 V
--------------------	--------

KEMA rated current	76 A
--------------------	------

KEMA rated impulse voltage	8 kV
----------------------------	------

KEMA wire cross-section (DIN 46234), min.	0.1 mm ²
---	---------------------

KEMA wire cross-section (DIN 46234), max.	16 mm ²
---	--------------------

KEMA wire cross-section (DIN 46235), min.	0.1 mm ²
---	---------------------

KEMA wire cross-section (DIN 46235), max.	10 mm ²
---	--------------------

UL Recognized

UL Recognized	UL 1059
---------------	---------

UL Recognized granted	✓
-----------------------	---

UL Usegroup E: rated voltage	1000 V
------------------------------	--------

UL Usegroup E: rated current	60 A
------------------------------	------

UL wire cross-section AWG, max.	6
---------------------------------	---

UL torque, max.	75.2 Lb In.
-----------------	-------------

UL wire material	Cu
------------------	----

UL factory wiring	✓
-------------------	---

17000.2

HSK 16/M5 B BG

HSK 16/M5 B BG

Approvals

UL Recognized

UL field wiring


✓

17000.2

HSK 16/M5 B BG

HSK 16/M5 B BG

Media

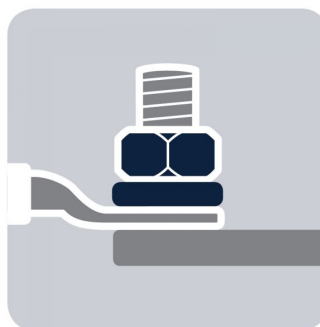

EAC



17000.2

HSK 16/M5 B BG

HSK 16/M5 B BG

Accessories

Cover hood




Cover profile, Length: 52 mm, Width: 13 mm, Colour: Yellow

In general

Order number	Article designation	GTIN (EAN)	Packaging unit
17019.8	AD 16	4044211131647	20 PC

End bracket



End stop, Mounting type: Mounting rail TS 35/7.5, Width: 9.5 mm, Colour: Beige

In general

Order number	Article designation	GTIN (EAN)	Packaging unit
2828.0	ES 35/K/ST	4044211055547	50 PC

17000.2

HSK 16/M5 B BG

HSK 16/M5 B BG

Accessories

Cross connector



Cross-connector, No. of poles: 2, Mounting type: Can be screwed on, Width: 27 mm, Rated cross-section: 16 mm², Colour: natural

In general

Order number	Article designation	GTIN (EAN)	Packaging unit
17008.0	QS 2/16	4044211131531	10 PC



Cross-connector, No. of poles: 3, Mounting type: Can be screwed on, Width: 42 mm, Rated cross-section: 16 mm², Colour: natural

In general

Order number	Article designation	GTIN (EAN)	Packaging unit
17009.0	QS 3/16	4044211131548	10 PC


17000.2

HSK 16/M5 B BG

HSK 16/M5 B BG

Accessories

Quick-marking




Terminal marker / Pocket Maxicard, Length: 5 mm,
Width: 6 mm, Colour: White

In general

Order number	Article designation	GTIN (EAN)	Packaging unit
4702.7	PMC SB 6/50 WH	4044211089986	500 PC

Partition plate

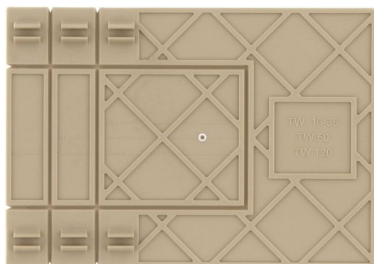

Partition plate, Width: 2 mm, Colour: Beige

In general

Order number	Article designation	GTIN (EAN)	Packaging unit
17018.2	TW 16-120	4044211131630	20 PC
