


17203.8

SQI 2,5/4 YE

SQI 2,5/4 YE

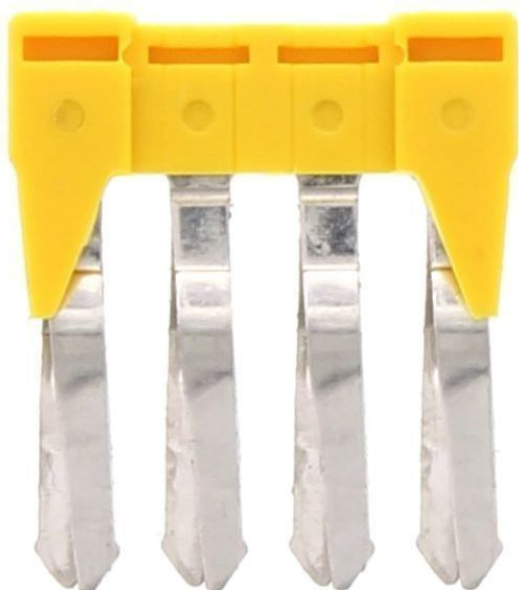

Insulated cross-connector, No. of poles: 4, Mounting type: Plug in, Width: 20.1 mm, Rated cross-section: 2.5 mm², Colour: Yellow

Business data

Product description	Insulated cross-connector
Packaging unit	20
Quantity unit	PC
Weight per piece (not including packaging)	2.3
Weight per piece (including packaging)	2.37
Unit of weight	G
Customs number	85389099
Country of origin	DE

17203.8

SQI 2,5/4 YE

SQI 2,5/4 YE

Technical Data

Dimensions

Length	4 mm
Width	20.1 mm
Pitch size	5 mm

Ratings

Voltage with partition, max.	1000 V
Voltage without partition, max.	1000 V
Rated current	24 A
Current load, max.	32 A
Rated cross-section	2.5 mm ²
Contamination degree	3

Connection data

No. of poles	4
--------------	---

17203.8

SQI 2,5/4 YE

SQI 2,5/4 YE

Technical Data

Materials

Material	Bronze
Insulation housing	Polyamide 6.6
Flammability class UL 94	V-2
Working temperature, min.	-40 °C
Working temperature, max.	105 °C

Further technical data

Mounting type	Plug in
Insulation available	✓
Touch protection is available	✓
Number of bridged terminals	4

17203.8

SQI 2,5/4 YE

SQI 2,5/4 YE

Accessories

Insulating cover for cross-connector



Insulating cap, Colour: Yellow

In general

Order number	Article designation	GTIN (EAN)	Packaging unit
17200.8	SQIK 2,5-10	4044211148539	20 PC
