


17381.6

SDK 4/2A/Z GR

SDK 4/2A/Z GR

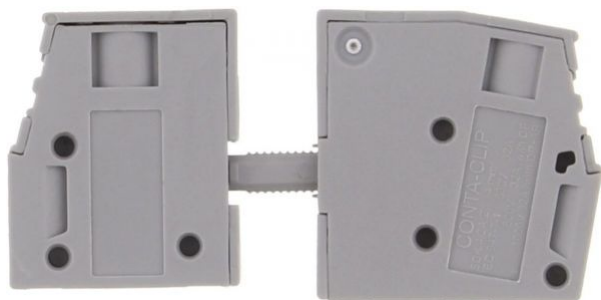

M3

EAC



UL US

Feed-through terminal, Screw connection, Mounting type: Mounting surface, Rated cross-section: 4 mm<sup>2</sup>, Colour: Grey

## Business data

Product description	Panel feed-through terminal
Packaging unit	50
Quantity unit	PC
Weight per piece (not including packaging)	14.11
Weight per piece (including packaging)	14.14
Unit of weight	G
Customs number	85369010
Country of origin	DE

17381.6

SDK 4/2A/Z GR

SDK 4/2A/Z GR

## Technical Data

---

### Dimensions

---

Length of outer part	27.5 mm
Length of inner part	22.4 mm
Width of outer part	8.1 mm
Width of inner part	8.1 mm
Height of outer part	28.2 mm
Height of inner part	26.8 mm

### Ratings

---

Rated voltage	630 V
Rated voltage when using spacer plates and mounted on a conductive housing panel	800 V
Rated voltage when using spacer plates and adapter plates, and when mounting on a conductive housing panel	1000 V
Rated current	32 A
Current load, max.	41 A
Rated cross-section	4 mm <sup>2</sup>
Rated impulse voltage	6 kV
Overvoltage category	III
Contamination degree	3

17381.6

SDK 4/2A/Z GR

SDK 4/2A/Z GR

## Technical Data

---

### Connection data

Connection principle	Screw connection
Number of terminals per pole	2
No. of poles	1
Wire cross-section single-core (rigid) / stranded, min.	0.2 mm <sup>2</sup>
Wire cross-section single core (rigid)/stranded, max.	6 mm <sup>2</sup>
Wire cross-section stranded, min.	0.2 mm <sup>2</sup>
Wire cross-section stranded, max.	6 mm <sup>2</sup>
Wire cross-section stranded with wire-end ferrules, min.	0.2 mm <sup>2</sup>
Wire cross-section stranded with wire-end ferrules, max.	4 mm <sup>2</sup>
Wire cross-section AWG, min.	26
Wire cross-section AWG, max.	10
Stripping length	10 mm
Screw head	Slotted
Screw threading	M 3
Tightening torque, min.	0.5 Nm
Tightening torque, max.	1 Nm

17381.6

SDK 4/2A/Z GR

SDK 4/2A/Z GR

## Technical Data

---

### Materials

Insulation housing	Polyamide 6.6
Flammability class UL 94	V-0
Working temperature, min.	-40 °C
Working temperature, max.	120 °C

### Further technical data

Mounting type	Mounting face
Gauge plug acc. to EN 60 947-1	A4
Sheet thickness, min.	1 mm
Max. sheet thickness	4 mm
Sheet thickness when using spacer plates, min.	1 mm
Sheet thickness when using spacer plates, max.	3 mm
Thickness of mounting plate, min.	1
Thickness of mounting plate, max.	4

# Datasheet



17381.6

SDK 4/2A/Z GR

SDK 4/2A/Z GR

## Approvals

---

### Standards and regulations

---

EAC approval	TR ZU 004/2011
--------------	----------------

EAC approval granted	✓
----------------------	---

---

17381.6

SDK 4/2A/Z GR

SDK 4/2A/Z GR

## Approvals

---

### cUL Recognized

cUL Recognized	C22.2 No 158
cUL Recognized	✓
cUL Usegroup B: rated voltage	300 V
cUL Usegroup B: rated voltage when using the SDK 4-DP spacer plate and the SDK 4-AP adapter plate	300 V
cUL Usegroup B: rated voltage when using the SDK ...-VPI moulded plate and the SDK ...-TWI partition	600 V
cUL Usegroup B: rated current	30 A
cUL Usegroup B: rated current when using the SDK 4-DP spacer plate and the SDK 4-AP adapter plate	30 A
cUL Usegroup B: rated current when using the SDK ...-VPI moulded plate and the SDK ...-TWI partition	30 A
cUL Usegroup C: rated voltage when using the SDK 4-DP spacer plate and the SDK 4-AP adapter plate	300 V
cUL Usegroup C: rated voltage when using the SDK 4-VPI moulded plate or the SDK 4-TWI partition	600 V
cUL Usegroup C: rated current when using the SDK 4-DP spacer plate and the SDK 4-AP adapter plate	30 A
cUL Usegroup C: rated current when using the SDK 4-VPI moulded plate or the SDK 4-TWI partition	30 A
cUL Usegroup D: rated voltage	300 V
cUL Usegroup D: rated voltage when using the SDK 4-DP spacer plate	600 V
cUL Usegroup D: rated voltage when using the SDK ...-DP spacer plate and the SDK ...-AP adapter plate	300 V
cUL Usegroup D: rated current	30 A
cUL Usegroup D: rated current when using the SDK 4-DP spacer plate	5 A
cUL Usegroup D: rated current when using the SDK ...-DP spacer plate and the SDK ...-AP adapter plate	30 A
cUL wire cross-section single-core (rigid) AWG, min.	26

cUL wire cross-section single-core (rigid) AWG, min. 26  
© CONTA-CLIP Verbindungstechnik GmbH | Otto-Hahn-Str. 7 | D-33161 Hövelhof  
 Fon +49 (0) 52 57 98 33-0 | Fax +49 (0) 52 57 98 33-33 | E-Mail info@conta-clip.de | conta-clip.de

17381.6

SDK 4/2A/Z GR

SDK 4/2A/Z GR

## Approvals

---

### cUL Recognized

---

cUL wire cross-section stranded AWG, min.	26
cUL wire cross-section stranded AWG, max.	10
cUL torque, min.	0.5 Nm
cUL torque, max.	1 Nm
cUL wire material	Cu

### KEMA KEUR approval

---

KEMA KEUR approval	EN 60947-7-1
KEMA KEUR approval granted	✓
KEMA rated voltage	630 V
KEMA rated voltage when using spacer plates and mounted on a conductive housing panel	800 V
KEMA rated voltage when using spacer plates and adapter plates, and when mounting on a conductive housing panel	1000 V
KEMA rated current	32 A
KEMA conventional thermal current in free air	41 A
KEMA rated impulse voltage (for 250 V without partitions)	6 kV
KEMA wire cross-section, min.	0.2 mm <sup>2</sup>
KEMA wire cross-section, max.	6 mm <sup>2</sup>

17381.6

SDK 4/2A/Z GR

SDK 4/2A/Z GR

## Approvals

---

### UL Recognized

UL Recognized	UL 1059
UL Recognized granted	✓
UL Usegroup B: rated voltage	300 V
UL Usegroup B: rated voltage when using the SDK ...- DP spacer plate	300 V
UL Usegroup B: rated current when using the SDK 4- DP spacer plate and the SDK 4-AP adapter plate	600 A
UL Usegroup B: rated current	30 A
UL Usegroup B: rated current when using the SDK ...- DP spacer plate	30 A
UL Usegroup B: rated voltage when using the SDK 4- DP spacer plate and the SDK 4-AP adapter plate	30 V
UL Usegroup C: rated voltage when using the SDK 4- DP spacer plate	300 V
UL Usegroup C: rated voltage when using the SDK 4- DP spacer plate and the SDK 4-AP adapter plate	600 V
UL Usegroup C: rated current when using the SDK 4- DP spacer plate	30 A
UL Usegroup C: rated current when using the SDK 4- DP spacer plate and the SDK 4-AP adapter plate	30 A
UL Usegroup D: rated voltage	300 V
UL Usegroup D: rated voltage when using the SDK 4- VPI moulded plate or the SDK 4-TWI partition	600 V
UL Usegroup D: rated current	30 A
UL Usegroup D: rated current when using the SDK 4- VPI moulded plate or the SDK 4-TWI partition	5 A
UL wire cross-section single-core (rigid) AWG, min.	26
UL wire cross-section single-core (rigid) AWG, max.	10
UL wire cross-section stranded AWG, min.	26
UL wire cross-section stranded AWG, max.	10

© CONTA-CLIP Verbindungstechnik GmbH | Otto-Hahn-Str. 7 | D-33161 Hövelhof  
Fon +49 (0) 52 57.98 33-0 | Fax +49 (0) 52 57.98 33-33 | E-Mail info@conta-clip.de | conta-clip.de

Creation date 08.06.2020 10:46:00  
Subject to technical modifications



17381.6

SDK 4/2A/Z GR

SDK 4/2A/Z GR

## Approvals

---

### UL Recognized

---

UL torque, min.	4.42 Lb In.
UL torque, max.	8.85 Lb In.
UL wire material	Cu
UL factory wiring	✓
UL field wiring	✓

17381.6

SDK 4/2A/Z GR

SDK 4/2A/Z GR

Media

---



EAC



**CRV<sup>®</sup> US**

17381.6

SDK 4/2A/Z GR

SDK 4/2A/Z GR

## Accessories

---

### External adapter plate, 6-poles

---



Adapter plate, Colour: Grey

#### In general

Order number	Article designation	GTIN (EAN)	Packaging unit
17433.6	SDK 4-AP/6	4044211199272	10 PC

---

### Fastening screw, inside

---



Screw, Colour: natural

#### In general

Order number	Article designation	GTIN (EAN)	Packaging unit
17438.6	BS-SDK4 3x10	4044211206253	100 PC

---

17381.6

SDK 4/2A/Z GR

SDK 4/2A/Z GR

## Accessories

---

### Spacer plate set (inside + outside)

---



Partition plate, Width: 3 mm, Colour: Grey

---

#### In general

Order number	Article designation	GTIN (EAN)	Packaging unit
17431.6	SDK 4-DP	4044211199258	50 PC

---

### Set of flange plates (outside)

---



Flange plate, Colour: Grey

---

#### In general

Order number	Article designation	GTIN (EAN)	Packaging unit
17432.6	SDK 4-FP	4044211199265	50 PC

---

17381.6

SDK 4/2A/Z GR


SDK 4/2A/Z GR

## Accessories

---

### Quick-marking

---



Terminal marker / Pocket Maxicard, Length: 12 mm,  
Width: 8 mm, Colour: White

### In general

Order number	Article designation	GTIN (EAN)	Packaging unit
9410.7	PMC BSTR 8x12/21 WH	4044211154998	210 PC

---

### Screw driver

---



Screwdriver with bare blade, Colour: Black-grey

### In general

Order number	Article designation	GTIN (EAN)	Packaging unit
1086.0	SDB 0,6x3,5	4044211014797	1 PC

---