


3203.2

FSL 1,5/2A GNYE

FSL 1,5/2A GNYE

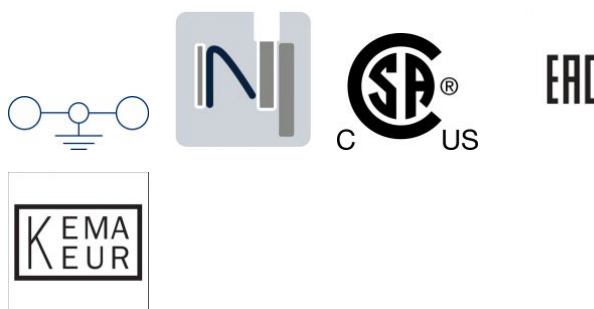

Protective earth terminal, Push-in connection, Mounting type: Mounting rail TS 35/7.5, Rated cross-section: 1.5 mm², Width: 4.1 mm, Colour: Green-yellow

Business data

Product description	Protective earth terminal
Packaging unit	100
Quantity unit	PC
Weight per piece (not including packaging)	7.6
Weight per piece (including packaging)	8.1
Unit of weight	G
Customs number	85369010
Country of origin	DE

3203.2

FSL 1,5/2A GNYE

FSL 1,5/2A GNYE

Technical Data

Dimensions

Length	48.5 mm
Width	4.1 mm
Height	42.3 mm
Height TS 35/7.5	43 mm

Ratings

Rated cross-section	1.5 mm ²
Overvoltage category	III
Contamination degree	3

3203.2

FSL 1,5/2A GNYE

FSL 1,5/2A GNYE

Technical Data

Connection data

Connection principle	Push-in connection
Connection position	Top
Connections	2
Number of terminals per level	2
Number of levels	1
Wire cross-section single-core (rigid) / stranded, min.	0.2 mm ²
Wire cross-section single core (rigid)/stranded, max.	1.5 mm ²
Wire cross-section stranded, min.	0.2 mm ²
Wire cross-section stranded, max.	1.5 mm ²
Wire cross-section stranded with wire-end ferrules, min.	0.2 mm ²
Wire cross-section stranded with wire-end ferrules, max.	1.5 mm ²
Wire cross-section AWG, min.	24
Wire cross-section AWG, max.	16
Stripping length	12 mm

Materials

Insulation housing	Polyamide 6.6
Flammability class UL 94	V-0
Working temperature, min.	-40 °C

3203.2

FSL 1,5/2A GNYE

FSL 1,5/2A GNYE

Technical Data

Materials

Working temperature, max.	120 °C
---------------------------	--------

Further technical data

Mounting type	Mounting rail TS 35/7,5
---------------	-------------------------

Gauge plug acc. to EN 60 947-1	A1
--------------------------------	----

Number of cross-connection channels	2
-------------------------------------	---

End plate required	✓
--------------------	---

3203.2

FSL 1,5/2A GNYE

FSL 1,5/2A GNYE

Approvals

Standards and regulations

EAC approval	TR ZU 004/2011
--------------	----------------

EAC approval granted	✓
----------------------	---

CSA approval

CSA approval	C22.2 No 158
--------------	--------------

CSA approval granted	✓
----------------------	---

CSA wire cross-section AWG, min.	24
----------------------------------	----

CSA wire cross-section AWG, max.	16
----------------------------------	----

CSA stripping length	12 mm
----------------------	-------

CSAus approval

CSAus approval	UL 1059
----------------	---------

CSAus approval granted	✓
------------------------	---

CSAus wire cross-section AWG, min.	24
------------------------------------	----

CSAus wire cross-section AWG, max.	16
------------------------------------	----

CSAus stripping length	12 mm
------------------------	-------

3203.2

FSL 1,5/2A GNYE

FSL 1,5/2A GNYE

Approvals

KEMA KEUR approval

KEMA KEUR approval	EN 60947-7-2
--------------------	--------------

KEMA KEUR approval granted	✓
----------------------------	---

KEMA wire cross-section single core (rigid), min.	0.2 mm ²
---	---------------------

KEMA wire cross-section single-core (rigid), max.	1.5 mm ²
---	---------------------

KEMA wire cross-section stranded, min.	0.2 mm ²
--	---------------------


KEMA wire cross-section stranded, max.	1.5 mm ²
--	---------------------

3203.2

FSL 1,5/2A GNYE

FSL 1,5/2A GNYE

Media

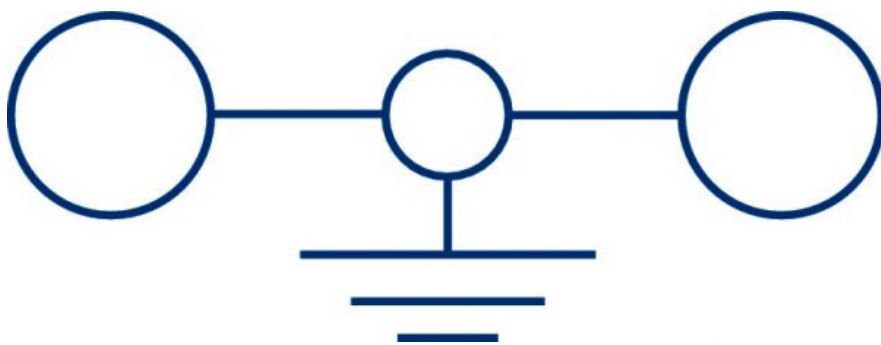

3203.2

FSL 1,5/2A GNYE

FSL 1,5/2A GNYE

Accessories

End plate



End plate, Width: 1.5 mm, Colour: Beige

In general

Order number	Article designation	GTIN (EAN)	Packaging unit
3400.2	FAP 1,5-4/2A	4044211110208	20 PC

End bracket



End stop, Mounting type: Mounting rail TS 35/7.5 and TS 35/15, Width: 5 mm, Colour: Beige

In general

Order number	Article designation	GTIN (EAN)	Packaging unit
3811.2	ZES 35/2	4044211080600	50 PC


3203.2

FSL 1,5/2A GNYE

FSL 1,5/2A GNYE

Accessories

Quick-marking



Terminal marker / Pocket Maxicard, Length: 5 mm,
Width: 4 mm, Colour: White

In general

Order number	Article designation	GTIN (EAN)	Packaging unit
4820.7	PMC SB 4/50 WH	4044211112127	500 PC

Screw driver



Screwdriver with bare blade, Colour:

In general

Order number	Article designation	GTIN (EAN)	Packaging unit
3164.0	SDB 0,4x2,0	4044211107246	1 PC

3203.2

FSL 1,5/2A GNYE

FSL 1,5/2A GNYE

Accessories

Fourfold-cover



Cover, Length: 3.4 mm, Width: 15.7 mm, Colour: Yellow

In general

Order number	Article designation	GTIN (EAN)	Packaging unit
3425.8	FAD 1,5/4/B	4044211132910	20 PC
