
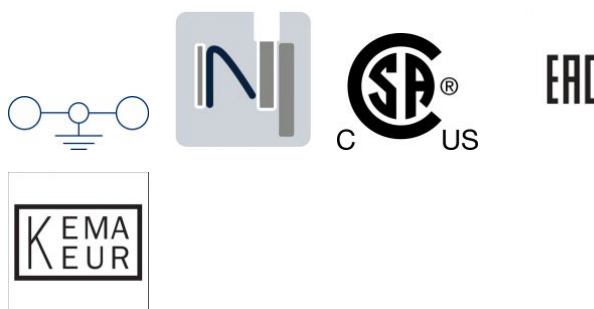


3213.2

FSL 2,5/2A GNYE

FSL 2,5/2A GNYE

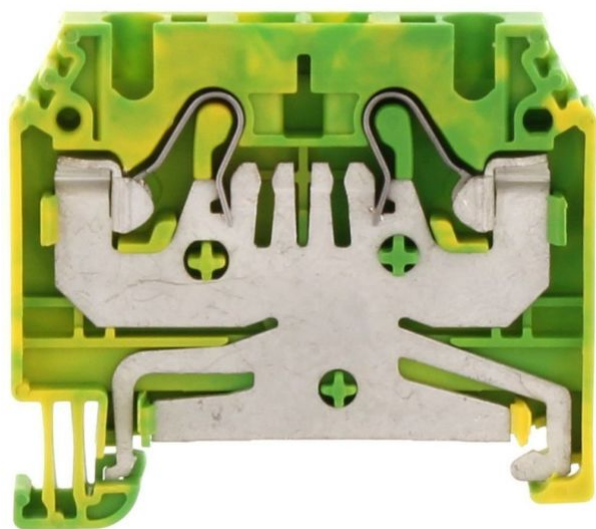

Protective earth terminal, Push-in connection, Mounting type: Mounting rail TS 35/7.5, Rated cross-section: 2.5 mm<sup>2</sup>, Width: 5.1 mm, Colour: Green-yellow

## Business data

Product description	Protective earth terminal
Packaging unit	100
Quantity unit	PC
Weight per piece (not including packaging)	9.8
Weight per piece (including packaging)	10.3
Unit of weight	G
Customs number	85369010
Country of origin	DE

**3213.2**

**FSL 2,5/2A GNYE**

**FSL 2,5/2A GNYE**

## Technical Data

---

### Dimensions

---

Length	48.5 mm
--------	---------

Width	5.1 mm
-------	--------

Height	42.3 mm
--------	---------

Height TS 35/7.5	43 mm
------------------	-------

### Ratings

---

Rated cross-section	2.5 mm <sup>2</sup>
---------------------	---------------------

Overvoltage category	III
----------------------	-----

Contamination degree	3
----------------------	---

**3213.2**

**FSL 2,5/2A GNYE**

**FSL 2,5/2A GNYE**

## Technical Data

---

### Connection data

---

Connection principle	Push-in connection
Connection position	Top
Connections	2
Number of terminals per level	2
Number of levels	1
Wire cross-section single-core (rigid) / stranded, min.	0.2 mm <sup>2</sup>
Wire cross-section single core (rigid)/stranded, max.	4 mm <sup>2</sup>
Wire cross-section stranded, min.	0.2 mm <sup>2</sup>
Wire cross-section stranded, max.	4 mm <sup>2</sup>
Wire cross-section stranded with wire-end ferrules, min.	0.2 mm <sup>2</sup>
Wire cross-section stranded with wire-end ferrules, max.	2.5 mm <sup>2</sup>
Wire cross-section AWG, min.	26
Wire cross-section AWG, max.	12
Stripping length	12 mm

### Materials

---

Insulation housing	Polyamide 6.6
Flammability class UL 94	V-0
Working temperature, min.	-40 °C

**3213.2**

**FSL 2,5/2A GNYE**

**FSL 2,5/2A GNYE**

## Technical Data

---

### Materials

---

Working temperature, max.	120 °C
---------------------------	--------

---

### Further technical data

---

Mounting type	Mounting rail TS 35/7,5
---------------	-------------------------

---

Gauge plug acc. to EN 60 947-1	A3
--------------------------------	----

---

Number of cross-connection channels	2
-------------------------------------	---

---

End plate required	✓
--------------------	---

---

**3213.2**

**FSL 2,5/2A GNYE**

**FSL 2,5/2A GNYE**

## Approvals

---

### Standards and regulations

---

EAC approval	TR ZU 004/2011
--------------	----------------

EAC approval granted	✓
----------------------	---

### CSA approval

---

CSA approval	C22.2 No 158
--------------	--------------

CSA approval granted	✓
----------------------	---

CSA wire cross-section AWG, min.	26
----------------------------------	----

CSA wire cross-section AWG, max.	12
----------------------------------	----

CSA stripping length	12 mm
----------------------	-------

### CSAus approval

---

CSAus approval	UL 1059
----------------	---------

CSAus approval granted	✓
------------------------	---

CSAus wire cross-section AWG, min.	26
------------------------------------	----

CSAus wire cross-section AWG, max.	12
------------------------------------	----

CSAus stripping length	12 mm
------------------------	-------

3213.2

FSL 2,5/2A GNYE

FSL 2,5/2A GNYE

## Approvals

---

### KEMA KEUR approval

KEMA KEUR approval	EN 60947-7-2
KEMA KEUR approval granted	✓
KEMA wire cross-section single core (rigid), min.	0.2 mm <sup>2</sup>
KEMA wire cross-section single-core (rigid), max.	4 mm <sup>2</sup>
KEMA wire cross-section stranded, min.	0.2 mm <sup>2</sup>
KEMA wire cross-section stranded, max.	4 mm <sup>2</sup>


3213.2

FSL 2,5/2A GNYE

FSL 2,5/2A GNYE

## Media

---

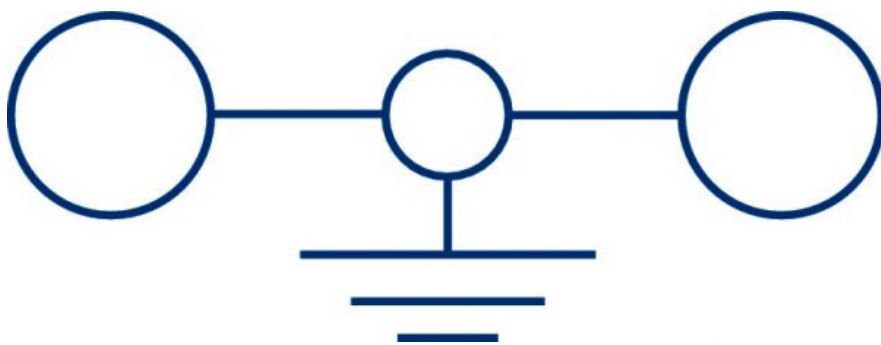

EAC



3213.2

FSL 2,5/2A GNYE

FSL 2,5/2A GNYE

## Accessories

---

### End plate

---



End plate, Width: 1.5 mm, Colour: Beige

### In general

Order number	Article designation	GTIN (EAN)	Packaging unit
3400.2	FAP 1,5-4/2A	4044211110208	20 PC

---

### End bracket

---



End stop, Mounting type: Mounting rail TS 35/7.5 and TS 35/15, Width: 5 mm, Colour: Beige

### In general

Order number	Article designation	GTIN (EAN)	Packaging unit
3811.2	ZES 35/2	4044211080600	50 PC

---



3213.2

FSL 2,5/2A GNYE


FSL 2,5/2A GNYE

## Accessories

---

### Quick-marking

---



Terminal marker / Pocket Maxicard, Length: 5 mm,  
Width: 5 mm, Colour: White

### In general

Order number	Article designation	GTIN (EAN)	Packaging unit
4600.7	PMC SB 5/50 WH	4044211088903	500 PC

### Screw driver

---



Screwdriver with bare blade, Colour: Black-grey

### In general

Order number	Article designation	GTIN (EAN)	Packaging unit
1085.0	SDB 0,5x3,0	4044211014643	1 PC

3213.2

FSL 2,5/2A GNYE

FSL 2,5/2A GNYE

## Accessories

---

### Fourfold-cover

---



Cover, Length: 3.4 mm, Width: 19.8 mm, Colour: Yellow

---

### In general

Order number	Article designation	GTIN (EAN)	Packaging unit
3426.8	FAD 2,5/4/B	4044211132934	20 PC

---