



3214.2

FSL 2,5/3A GNYE

FSL 2,5/3A GNYE

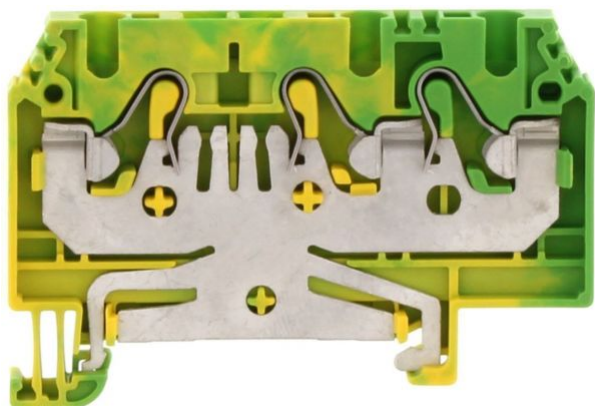

Protective earth terminal, Push-in connection, Mounting type: Mounting rail TS 35/7.5, Rated cross-section: 2.5 mm², Width: 5.1 mm, Colour: Green-yellow

Business data

Product description	Protective earth terminal
Packaging unit	100
Quantity unit	PC
Weight per piece (not including packaging)	12.6
Weight per piece (including packaging)	13.35
Unit of weight	G
Customs number	85369010
Country of origin	DE

3214.2

FSL 2,5/3A GNYE

FSL 2,5/3A GNYE

Technical Data

Dimensions

Length	63.1 mm
--------	---------

Width	5.1 mm
-------	--------

Height	42.3 mm
--------	---------

Height TS 35/7.5	43 mm
------------------	-------

Ratings

Rated cross-section	2.5 mm ²
---------------------	---------------------

Overvoltage category	III
----------------------	-----

Contamination degree	3
----------------------	---

3214.2

FSL 2,5/3A GNYE

FSL 2,5/3A GNYE

Technical Data

Connection data

Connection principle	Push-in connection
Connection position	Top
Connections	3
Number of terminals per level	3
Number of levels	1
Wire cross-section single-core (rigid) / stranded, min.	0.2 mm ²
Wire cross-section single core (rigid)/stranded, max.	4 mm ²
Wire cross-section stranded, min.	0.2 mm ²
Wire cross-section stranded, max.	4 mm ²
Wire cross-section stranded with wire-end ferrules, min.	0.2 mm ²
Wire cross-section stranded with wire-end ferrules, max.	2.5 mm ²
Wire cross-section AWG, min.	26
Wire cross-section AWG, max.	12
Stripping length	12 mm

Materials

Insulation housing	Polyamide 6.6
Flammability class UL 94	V-0
Working temperature, min.	-40 °C

3214.2

FSL 2,5/3A GNYE

FSL 2,5/3A GNYE

Technical Data

Materials

Working temperature, max.	120 °C
---------------------------	--------

Further technical data

Mounting type	Mounting rail TS 35/7,5
---------------	-------------------------

Gauge plug acc. to EN 60 947-1	A3
--------------------------------	----

Number of cross-connection channels	2
-------------------------------------	---

End plate required	✓
--------------------	---

3214.2

FSL 2,5/3A GNYE

FSL 2,5/3A GNYE

Approvals

Standards and regulations

EAC approval	TR ZU 004/2011
--------------	----------------

EAC approval granted	✓
----------------------	---

CSA approval

CSA approval	C22.2 No 158
--------------	--------------

CSA approval granted	✓
----------------------	---

CSA wire cross-section AWG, min.	26
----------------------------------	----

CSA wire cross-section AWG, max.	12
----------------------------------	----

CSA stripping length	12 mm
----------------------	-------

CSAus approval

CSAus approval	UL 1059
----------------	---------

CSAus approval granted	✓
------------------------	---

CSAus wire cross-section AWG, min.	26
------------------------------------	----

CSAus wire cross-section AWG, max.	12
------------------------------------	----

CSAus stripping length	12 mm
------------------------	-------

3214.2

FSL 2,5/3A GNYE

FSL 2,5/3A GNYE

Approvals

KEMA KEUR approval


KEMA KEUR approval	EN 60947-7-2
KEMA KEUR approval granted	✓
KEMA wire cross-section single core (rigid), min.	0.2 mm ²
KEMA wire cross-section single-core (rigid), max.	4 mm ²
KEMA wire cross-section stranded, min.	0.2 mm ²
KEMA wire cross-section stranded, max.	4 mm ²

3214.2

FSL 2,5/3A GNYE

FSL 2,5/3A GNYE

Media

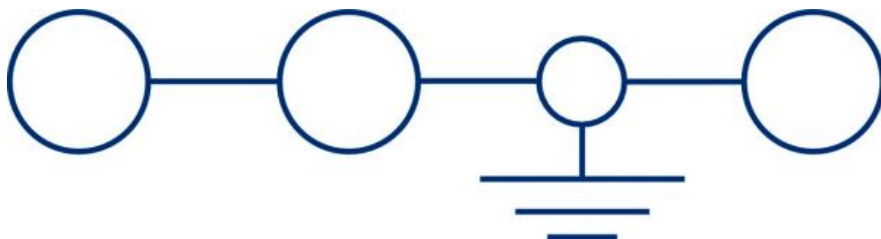

3214.2

FSL 2,5/3A GNYE

FSL 2,5/3A GNYE

Accessories

End plate



End plate, Width: 1.5 mm, Colour: Beige

In general

Order number	Article designation	GTIN (EAN)	Packaging unit
3411.2	FAP 2,5/3A	4044211110390	20 PC

End bracket



End stop, Mounting type: Mounting rail TS 35/7.5 and TS 35/15, Width: 5 mm, Colour: Beige

In general

Order number	Article designation	GTIN (EAN)	Packaging unit
3811.2	ZES 35/2	4044211080600	50 PC


3214.2

FSL 2,5/3A GNYE

FSL 2,5/3A GNYE

Accessories

Quick-marking



Terminal marker / Pocket Maxicard, Length: 5 mm,
Width: 5 mm, Colour: White

In general

Order number	Article designation	GTIN (EAN)	Packaging unit
4600.7	PMC SB 5/50 WH	4044211088903	500 PC

Screw driver



Screwdriver with bare blade, Colour: Black-grey

In general

Order number	Article designation	GTIN (EAN)	Packaging unit
1085.0	SDB 0,5x3,0	4044211014643	1 PC

3214.2

FSL 2,5/3A GNYE

FSL 2,5/3A GNYE

Accessories

Fourfold-cover



Cover, Length: 3.4 mm, Width: 19.8 mm, Colour: Yellow

In general

Order number	Article designation	GTIN (EAN)	Packaging unit
3426.8	FAD 2,5/4/B	4044211132934	20 PC
