


3236.2

FSLD 2,5 GNYE

FSLD 2,5 GNYE

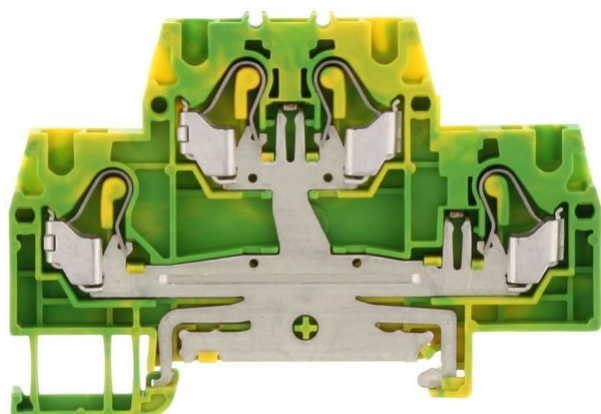

Protective-earth double-level terminal, Push-in connection, Mounting type: Mounting rail TS 35/7.5, Rated cross-section: 2.5 mm², Width: 5.1 mm, Colour: Green-yellow

Business data

Product description	Protective-earth double-level terminal
Packaging unit	100
Quantity unit	PC
Weight per piece (not including packaging)	15.6
Weight per piece (including packaging)	16.57
Unit of weight	G
Customs number	85369010
Country of origin	DE

3236.2

FSLD 2,5 GNYE

FSLD 2,5 GNYE

Technical Data

Dimensions

Length	75.4 mm
--------	---------

Width	5.1 mm
-------	--------

Height TS 35/7.5	53 mm
------------------	-------

Height TS 35 / 7.5 with BA	66 mm
----------------------------	-------

Ratings

Rated cross-section	2.5 mm ²
---------------------	---------------------

Overvoltage category	III
----------------------	-----

Contamination degree	3
----------------------	---

3236.2

FSLD 2,5 GNYE

FSLD 2,5 GNYE

Technical Data

Connection data

Connection principle	Push-in connection
Connection position	Top
Connections	4
Number of terminals per level	2
Number of levels	2
Levels internally bridged	✓
Wire cross-section single-core (rigid) / stranded, min.	0.2 mm ²
Wire cross-section single core (rigid)/stranded, max.	4 mm ²
Wire cross-section stranded, min.	0.2 mm ²
Wire cross-section stranded, max.	4 mm ²
Wire cross-section stranded with wire-end ferrules, min.	0.2 mm ²
Wire cross-section stranded with wire-end ferrules, max.	2.5 mm ²
Wire cross-section AWG, min.	26
Wire cross-section AWG, max.	14
Stripping length	12 mm

Materials

Insulation housing	Polyamide 6.6
Flammability class UL 94	V-0

3236.2

FSLD 2,5 GNYE

FSLD 2,5 GNYE

Technical Data

Materials

Working temperature, min.	-40 °C
---------------------------	--------

Working temperature, max.	120 °C
---------------------------	--------

Further technical data

Mounting type	Mounting rail TS 35/7,5
---------------	-------------------------

Gauge plug acc. to EN 60 947-1	A3
--------------------------------	----

Number of cross-connection channels	2
-------------------------------------	---

End plate required	✓
--------------------	---

3236.2

FSLD 2,5 GNYE

FSLD 2,5 GNYE

Approvals

Standards and regulations

EAC approval	TR ZU 004/2011
--------------	----------------

EAC approval granted	✓
----------------------	---

CSA approval

CSA approval	C22.2 No 158
--------------	--------------

CSA approval granted	✓
----------------------	---

CSA wire cross-section AWG, min.	26
----------------------------------	----

CSA wire cross-section AWG, max.	12
----------------------------------	----

CSAus approval

CSAus approval	UL 1059
----------------	---------

CSAus approval granted	✓
------------------------	---

CSAus wire cross-section AWG, min.	26
------------------------------------	----

CSAus wire cross-section AWG, max.	12
------------------------------------	----

3236.2

FSLD 2,5 GNYE

FSLD 2,5 GNYE

Approvals

KEMA KEUR approval


KEMA KEUR approval	EN 60947-7-2
KEMA KEUR approval granted	✓
KEMA wire cross-section single core (rigid), min.	0.2 mm ²
KEMA wire cross-section single-core (rigid), max.	4 mm ²
KEMA wire cross-section stranded, min.	0.2 mm ²
KEMA wire cross-section stranded, max.	4 mm ²
KEMA wire cross-section stranded with wire-end ferrules, min.	0.2 mm ²
KEMA wire cross-section stranded with wire-end ferrules, max.	2.5 mm ²

3236.2

FSLD 2,5 GNYE

FSLD 2,5 GNYE

Media

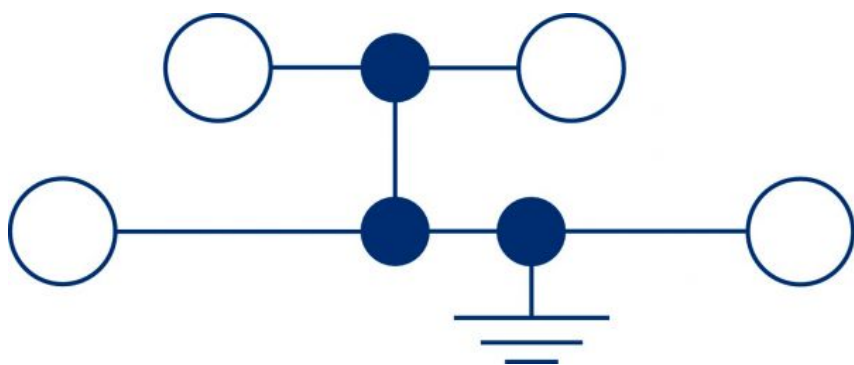


3236.2

FSLD 2,5 GNYE

FSLD 2,5 GNYE

Accessories

End plate

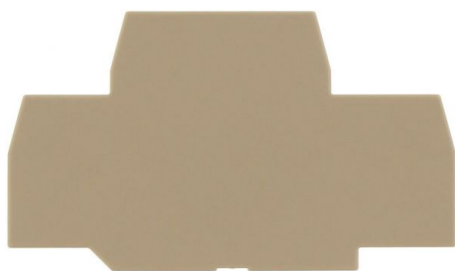

End plate, Width: 1.5 mm, Colour: Beige

In general

Order number	Article designation	GTIN (EAN)	Packaging unit
3423.2	FAPD 2,5	4044211130169	20 PC

Marking adapter



Cover, Length: 3.4 mm, Width: 15.7 mm, Colour: Yellow

In general

Order number	Article designation	GTIN (EAN)	Packaging unit
3425.8	FAD 1,5/4/B	4044211132910	20 PC

3236.2

FSLD 2,5 GNYE

FSLD 2,5 GNYE

Accessories

End bracket




End stop, Mounting type: Mounting rail TS 35/7.5 and TS 35/15, Width: 5 mm, Colour: Beige

In general

Order number	Article designation	GTIN (EAN)	Packaging unit
3811.2	ZES 35/2	4044211080600	50 PC

Quick-marking



Terminal marker / Pocket Maxicard, Length: 5 mm, Width: 5 mm, Colour: White

In general

Order number	Article designation	GTIN (EAN)	Packaging unit
4600.7	PMC SB 5/50 WH	4044211088903	500 PC

3236.2

FSLD 2,5 GNYE

FSLD 2,5 GNYE

Accessories

Screw driver



Screwdriver with bare blade, Colour:

In general

Order number	Article designation	GTIN (EAN)	Packaging unit
3164.0	SDB 0,4x2,0	4044211107246	1 PC

Fourfold-cover



Cover, Length: 3.4 mm, Width: 19.8 mm, Colour: Yellow

In general

Order number	Article designation	GTIN (EAN)	Packaging unit
3426.8	FAD 2,5/4/B	4044211132934	20 PC
