


3518.3

ZRK 4/2x2A OG

ZRK 4/2x2A OG

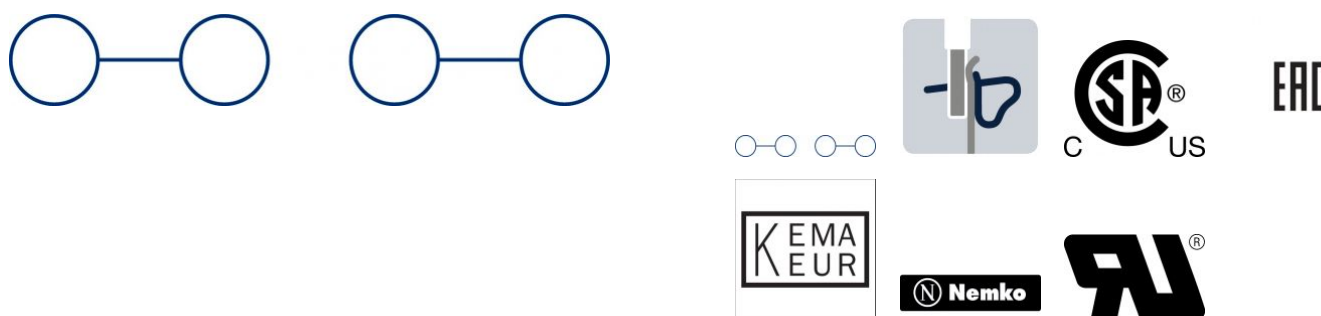

Feed-through terminal, Tension-spring connection, Mounting type: Mounting rail TS 35/7.5, Rated cross-section: 4 mm², Width: 6.1 mm, Colour: Orange

Business data

Product description	Feed-through terminal
Packaging unit	100
Quantity unit	PC
Weight per piece (not including packaging)	14.4
Weight per piece (including packaging)	15.4
Unit of weight	G
Customs number	85369010
Country of origin	DE

3518.3

ZRK 4/2x2A OG

ZRK 4/2x2A OG

Technical Data

Dimensions

Length	93 mm
Width	6.1 mm
Height TS 35/7.5	42 mm

Ratings

Rated voltage	800 V
Rated current	32 A
Rated cross-section	4 mm ²
Rated impulse voltage	8 kV
Overvoltage category	III
Contamination degree	3

3518.3

ZRK 4/2x2A OG

ZRK 4/2x2A OG

Technical Data

Connection data

Connection principle	Tension-spring connection
Connection position	Diagonal
Connections	2 x 2
Number of terminals per level	4
Number of levels	1
Wire cross-section single-core (rigid) / stranded, min.	0.5 mm ²
Wire cross-section single core (rigid)/stranded, max.	6 mm ²
Wire cross-section stranded, min.	0.6 mm ²
Wire cross-section stranded, max.	6 mm ²
Wire cross-section stranded with wire-end ferrules, min.	0.5 mm ²
Wire cross-section stranded with wire-end ferrules, max.	4 mm ²
Wire cross-section AWG, min.	20
Wire cross-section AWG, max.	10
Stripping length	12 mm

Materials

Insulation housing	Polyamide 6.6
Flammability class UL 94	V-0
Working temperature, min.	-40 °C

3518.3

ZRK 4/2x2A OG

ZRK 4/2x2A OG

Technical Data

Materials

Working temperature, max.	120 °C
---------------------------	--------

Further technical data

Mounting type	Mounting rail TS 35/7,5
---------------	-------------------------

Gauge plug acc. to EN 60 947-1	A4
--------------------------------	----

End plate required	✓
--------------------	---

Number of test pick-off options	2
---------------------------------	---

3518.3

ZRK 4/2x2A OG

ZRK 4/2x2A OG

Approvals

Standards and regulations

EAC approval	TR ZU 004/2011
--------------	----------------

EAC approval granted	✓
----------------------	---

Nemko approval	EN 60947-7-1
----------------	--------------

Nemko approval granted	✓
------------------------	---

CSA approval

CSA approval	C22.2 No 158
--------------	--------------

CSA approval granted	✓
----------------------	---

CSA Usegroup C: rated voltage	600 V
-------------------------------	-------

CSA Usegroup C: rated current	35 A
-------------------------------	------

CSA wire cross-section AWG, min.	20
----------------------------------	----

CSA wire cross-section AWG, max.	10
----------------------------------	----

CSA stripping length	10 mm
----------------------	-------

3518.3

ZRK 4/2x2A OG

ZRK 4/2x2A OG

Approvals

CSAus approval

CSAus approval	UL 1059
CSAus approval granted	✓
CSAus Usegroup C: rated voltage	600 V
CSAus Usegroup C: rated current	35 A
CSAus wire cross-section AWG, min.	20
CSAus wire cross-section AWG, max.	10
CSAus stripping length	10 mm

KEMA KEUR approval

KEMA KEUR approval	EN 60947-7-1
KEMA KEUR approval granted	✓
KEMA rated voltage	800 V
KEMA rated current	32 A
KEMA rated impulse voltage	8 kV
KEMA wire cross-section single core (rigid), min.	0.6 mm ²
KEMA wire cross-section single-core (rigid), max.	6 mm ²
KEMA wire cross-section stranded, min.	0.6 mm ²
KEMA wire cross-section stranded, max.	6 mm ²

3518.3

ZRK 4/2x2A OG

ZRK 4/2x2A OG

Approvals

UL Recognized

UL Recognized	UL 1059
UL Recognized granted	✓
UL Usegroup B: rated voltage	600 V
UL Usegroup B: rated current	35 A
UL Usegroup C: rated voltage	600 V
UL Usegroup C: rated current	35 A
UL Usegroup D: rated voltage	600 V
UL Usegroup D: rated current	35 A
UL wire cross-section single-core (rigid) AWG, min.	20
UL wire cross-section single-core (rigid) AWG, max.	10
UL wire cross-section stranded AWG, min.	20
UL wire cross-section stranded AWG, max.	10
UL wire material	Cu
UL factory wiring	✓
UL field wiring	✓

3518.3

ZRK 4/2x2A OG

ZRK 4/2x2A OG

Media



EAC



3518.3

ZRK 4/2x2A OG

ZRK 4/2x2A OG

Media



3518.3

ZRK 4/2x2A OG

ZRK 4/2x2A OG

Accessories

End plate




End plate, Width: 2 mm, Colour: Beige

In general

Order number	Article designation	GTIN (EAN)	Packaging unit
3705.2	ZAP 4/4A	4044211060213	50 PC

End bracket

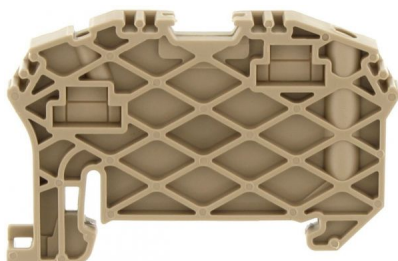

End stop, Mounting type: Mounting rail TS 35/7.5 and TS 35/15, Width: 6 mm, Colour: Beige

In general

Order number	Article designation	GTIN (EAN)	Packaging unit
3748.2	ZES 35	4044211060572	50 PC

3518.3

ZRK 4/2x2A OG

ZRK 4/2x2A OG

Accessories

Test adapter




Test adapter, Pitch size: 6.1 mm, Colour: Beige

In general

Order number	Article designation	GTIN (EAN)	Packaging unit
3741.2	ZTA 4	4044211060503	10 PC

Quick-marking



Terminal marker / Pocket Maxicard, Length: 5 mm,
Width: 6 mm, Colour: White

In general

Order number	Article designation	GTIN (EAN)	Packaging unit
4702.7	PMC SB 6/50 WH	4044211089986	500 PC


3518.3

ZRK 4/2x2A OG

ZRK 4/2x2A OG

Accessories

Fourfold-cover



Cover, Length: 8 mm, Width: 24.4 mm, Colour: Yellow

In general

Order number	Article designation	GTIN (EAN)	Packaging unit
3707.0	ZAD 4/4/B	4044211060251	20 PC
