


3535.2

ZIZA 1,5/4/B/LED(RD) BG

ZIZA 1,5/4/B/LED(RD)/24V BG

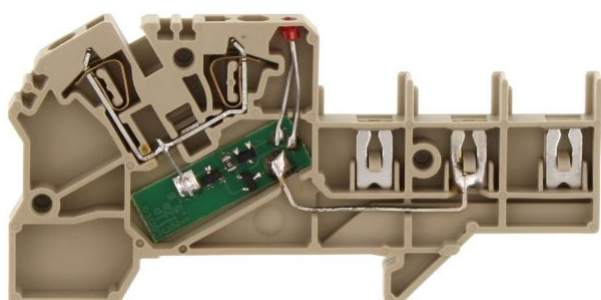

Initiator terminal / actuator terminal / block variant, Tension-spring connection, Mounting type: Mounting rail TS 35/7.5, Rated cross-section: 1.5 mm<sup>2</sup>, Width: 5.1 mm, Colour: Beige

## Business data

Product description	Initiator terminal / actuator terminal / block variant
Packaging unit	50
Quantity unit	PC
Weight per piece (not including packaging)	7.8
Weight per piece (including packaging)	9.2
Unit of weight	G
Customs number	85369010
Country of origin	DE

**3535.2**

**ZIZA 1,5/4/B/LED(RD) BG**

**ZIZA 1,5/4/B/LED(RD)/24V BG**

## Technical Data

---

### Dimensions

---

Length	82 mm
Width	5.1 mm
Height TS 35/7.5	40.5 mm
Pitch	5 mm

### Ratings

---

Rated voltage	400 V
Rated current	17,5 A
Rated cross-section	1.5 mm <sup>2</sup>
Rated impulse voltage	4 kV
Overvoltage category	III
Contamination degree	3

## 3535.2

### ZIZA 1,5/4/B/LED(RD) BG

### ZIZA 1,5/4/B/LED(RD)/24V BG

#### Technical Data

---

##### Connection data

---

Connection principle	Tension-spring connection
Connections	5
Number of terminals per level	5
Number of levels	1
Wire cross-section single-core (rigid) / stranded, min.	0.5 mm <sup>2</sup>
Wire cross-section single core (rigid)/stranded, max.	2.5 mm <sup>2</sup>
Wire cross-section stranded, min.	0.5 mm <sup>2</sup>
Wire cross-section stranded, max.	2.5 mm <sup>2</sup>
Wire cross-section stranded with wire-end ferrules, min.	0.5 mm <sup>2</sup>
Wire cross-section stranded with wire-end ferrules, max.	1.5 mm <sup>2</sup>
Wire cross-section AWG, min.	26
Wire cross-section AWG, max.	14
Stripping length	8 mm

##### Materials

---

Insulation housing	Polyamide 6.6
Flammability class UL 94	V-0
Working temperature, min.	-40 °C
Working temperature, max.	120 °C

##### Further technical data

---

Mounting type	Mounting rail TS 35/7,5
Gauge plug acc. to EN 60 947-1	A1
Number of cross-connection channels	1
End plate required	✓
Can be cross-connected	✓
Colour of lamp	Red

© CONTA-CLIP Verbindungstechnik GmbH | Otto-Hahn-Str. 7 | D-33161 Hövelhof  
Fon +49 (0) 52 57.98 33-0 | Fax +49 (0) 52 57.98 33-33 | E-Mail info@conta-clip.de | conta-clip.de

Creation date 01.06.2020 08:16:25  
Subject to technical modifications

**3535.2**

**ZIZA 1,5/4/B/LED(RD) BG**

**ZIZA 1,5/4/B/LED(RD)/24V BG**

## Approvals

---

### CSA approval

---

CSA approval	C22.2 No 158
CSA approval granted	✓
CSA Usegroup C: rated voltage	300 V
CSA Usegroup C: rated current	12,5 A
CSA wire cross-section AWG, min.	26
CSA wire cross-section AWG, max.	14
CSA stripping length	8 mm

### CSAus approval

---

CSAus approval	UL 1059
CSAus approval granted	✓
CSAus Usegroup C: rated voltage	300 V
CSAus Usegroup C: rated current	12,5 A
CSAus wire cross-section AWG, min.	26
CSAus wire cross-section AWG, max.	14
CSAus stripping length	8 mm

**3535.2**

**ZIZA 1,5/4/B/LED(RD) BG**

**ZIZA 1,5/4/B/LED(RD)/24V BG**

## Approvals

---

### cUL Recognized

---

cUL Recognized	C22.2 No 158
cUL Recognized	✓
cUL Usegroup C: rated voltage	300 V
cUL Usegroup C: rated current	12,5 A
cUL wire cross-section single-core (rigid) AWG, min.	26
cUL wire cross-section single-core (rigid) AWG, max.	14
cUL wire cross-section stranded AWG, min.	26
cUL wire cross-section stranded AWG, max.	14
cUL wire material	Cu

### German Lloyd approval

---

GL approval	IEC 60947-7-1
GL approval granted	✓
GL rated voltage	400 V
GL rated current	17,5 A
GL wire cross-section single core (rigid), min.	2.5 mm <sup>2</sup>
GL wire cross-section single-core (rigid), max.	1.5 mm <sup>2</sup>
GL wire cross-section, min.	1.5 mm <sup>2</sup>
GL wire cross-section stranded, max.	2.5 mm <sup>2</sup>

**3535.2**

**ZIZA 1,5/4/B/LED(RD) BG**

**ZIZA 1,5/4/B/LED(RD)/24V BG**

## Approvals

---

### German Lloyd approval

---

GL environmental category	C
---------------------------	---

---

### KEMA KEUR approval

---

KEMA KEUR approval	EN 60947-7-1
--------------------	--------------

---

KEMA KEUR approval granted	✓
----------------------------	---

---

KEMA rated voltage	400 V
--------------------	-------

---

KEMA rated current	17,5 A
--------------------	--------

---

KEMA rated impulse voltage	4 kV
----------------------------	------

---

KEMA wire cross-section single core (rigid), min.	0.5 mm <sup>2</sup>
---	---------------------

---

KEMA wire cross-section single-core (rigid), max.	2.5 mm <sup>2</sup>
---	---------------------

---

KEMA wire cross-section stranded, min.	0.5 mm <sup>2</sup>
--	---------------------

---

KEMA wire cross-section stranded, max.	2.5 mm <sup>2</sup>
--	---------------------

---

**3535.2**

**ZIZA 1,5/4/B/LED(RD) BG**

**ZIZA 1,5/4/B/LED(RD)/24V BG**

## Approvals

---

### UL Recognized

UL Recognized	UL 1059
UL Recognized granted	✓
UL Usegroup C: rated voltage	300 V
UL Usegroup C: rated current	12,5 A
UL wire cross-section single-core (rigid) AWG, min.	26
UL wire cross-section single-core (rigid) AWG, max.	14
UL wire cross-section stranded AWG, min.	14
UL wire cross-section stranded AWG, max.	26
UL wire material	Cu
UL factory wiring	✓
UL field wiring	✓

3535.2

ZIZA 1,5/4/B/LED(RD) BG

ZIZA 1,5/4/B/LED(RD)/24V BG

## Media

---





**3535.2**

**ZIZA 1,5/4/B/LED(RD) BG**


**ZIZA 1,5/4/B/LED(RD)/24V BG**

## Accessories

---

### End plate

---

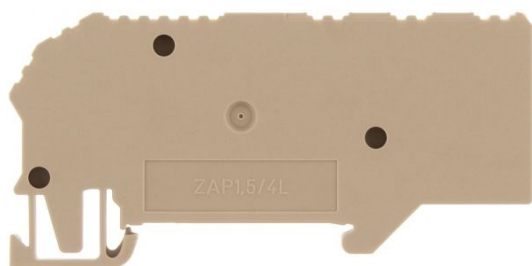

End plate, Width: 5.1 mm, Colour: Beige

### In general

Order number	Article designation	GTIN (EAN)	Packaging unit
3747.2	ZAP/TW ZIZA 1,5/4	4044211060565	20 PC

---

### Marking adapter

---



Label holder, Pitch size: 5.1 mm, Colour: beige

### In general

Order number	Article designation	GTIN (EAN)	Packaging unit
3786.2	ZBA 2 BG	4044211061128	50 PC

---

**3535.2**

**ZIZA 1,5/4/B/LED(RD) BG**

**ZIZA 1,5/4/B/LED(RD)/24V BG**

## Accessories

---

### Marking adapter

---



Label holder, Pitch size: 5.1 mm, Colour: beige


### In general

Order number	Article designation	GTIN (EAN)	Packaging unit
3787.2	ZBA 2/Z BG	4044211061135	50 PC

---

### End bracket

---

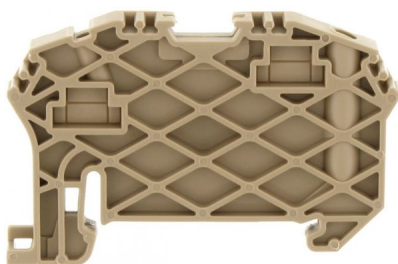

End stop, Mounting type: Mounting rail TS 35/7.5 and TS 35/15, Width: 6 mm, Colour: Beige

### In general

Order number	Article designation	GTIN (EAN)	Packaging unit
3748.2	ZES 35	4044211060572	50 PC

---

**3535.2**

**ZIZA 1,5/4/B/LED(RD) BG**

**ZIZA 1,5/4/B/LED(RD)/24V BG**

## Accessories

---

### Potential distribution rail

---



Potential distribution strip, Tension-spring connection, Mounting type: Plug in, Rated cross-section: 1.5 mm<sup>2</sup>, Width: 8.7 mm, Colour: Beige

---

### In general

Order number	Article designation	GTIN (EAN)	Packaging unit
3738.2	ZPL 1,5	4044211060473	100 PC

---



Potential distribution strip, Tension-spring connection, Mounting type: Plug in, Rated cross-section: 1.5 mm<sup>2</sup>, Width: 8.7 mm, Colour: Yellow

---

### In general

Order number	Article designation	GTIN (EAN)	Packaging unit
3791.8	ZPL 1,5	4044211061197	100 PC

---

**3535.2**

**ZIZA 1,5/4/B/LED(RD) BG**

**ZIZA 1,5/4/B/LED(RD)/24V BG**

## Accessories

---

### Potential distribution rail

---



Potential distribution strip, Tension-spring connection,  
Mounting type: Plug in, Rated cross-section: 1.5 mm<sup>2</sup>,  
Width: 8.7 mm, Colour: Green

---

### In general

Order number	Article designation	GTIN (EAN)	Packaging unit
3792.1	ZPL 1,5	4044211061203	100 PC

---



Potential distribution strip, Tension-spring connection,  
Mounting type: Plug in, Rated cross-section: 1.5 mm<sup>2</sup>,  
Width: 8.7 mm, Colour: Orange

---

### In general

Order number	Article designation	GTIN (EAN)	Packaging unit
3793.3	ZPL 1,5	4044211061210	100 PC

---

**3535.2**

**ZIZA 1,5/4/B/LED(RD) BG**

**ZIZA 1,5/4/B/LED(RD)/24V BG**

## Accessories

---

### Potential distribution rail

---



Potential distribution strip, Tension-spring connection,  
Mounting type: Plug in, Rated cross-section: 1.5 mm<sup>2</sup>,  
Width: 8.7 mm, Colour: Red-brown

---

### In general

Order number	Article designation	GTIN (EAN)	Packaging unit
3739.6	ZPL 1,5	4044211060480	100 PC

---



Potential distribution strip, Tension-spring connection,  
Mounting type: Plug in, Rated cross-section: 1.5 mm<sup>2</sup>,  
Width: 8.7 mm, Colour: Green-yellow

---

### In general

Order number	Article designation	GTIN (EAN)	Packaging unit
3743.2	ZPL 1,5 PE	4044211060527	100 PC

---

**3535.2**

**ZIZA 1,5/4/B/LED(RD) BG**

**ZIZA 1,5/4/B/LED(RD)/24V BG**

## Accessories

---

### Test adapter

---



Test adapter, Pitch size: 5.1 mm, Colour: Beige

### In general

Order number	Article designation	GTIN (EAN)	Packaging unit
17034.2	ZTA 1,5	4044211155452	10 PC

---

### Insulated cross connector

---



Insulated cross-connector, No. of poles: 99, Mounting type: Plug in, Width: 500 mm, Rated cross-section: 2.5 mm<sup>2</sup>, Colour: Yellow

### In general

Order number	Article designation	GTIN (EAN)	Packaging unit
3719.8	ZQI 2,5/0,5 m/99 poles	4044211060374	2 PC

---

**3535.2**

**ZIZA 1,5/4/B/LED(RD) BG**

**ZIZA 1,5/4/B/LED(RD)/24V BG**

## Accessories

---

### Insulated cross connector

---



Insulated cross-connector, No. of poles: 2, Mounting type: Plug in, Width: 9.1 mm, Rated cross-section: 2.5 mm<sup>2</sup>, Colour: Yellow


### In general

Order number	Article designation	GTIN (EAN)	Packaging unit
3710.8	ZQI 2,5/2	4044211060282	50 PC

---

### Quick-marking

---



Terminal marker / Pocket Maxicard, Length: 5 mm, Width: 5 mm, Colour: White

### In general

Order number	Article designation	GTIN (EAN)	Packaging unit
4600.7	PMC SB 5/50 WH	4044211088903	500 PC

---

**3535.2**

**ZIZA 1,5/4/B/LED(RD) BG**

**ZIZA 1,5/4/B/LED(RD)/24V BG**

## Accessories

---

### Screw driver

---



Screwdriver with bare blade, Colour: Black-grey

### In general

Order number	Article designation	GTIN (EAN)	Packaging unit
1085.0	SDB 0,5x3,0	4044211014643	1 PC

---