


3567.2

ZSLD 2,5 GNYE

ZSLD 2,5 GNYE

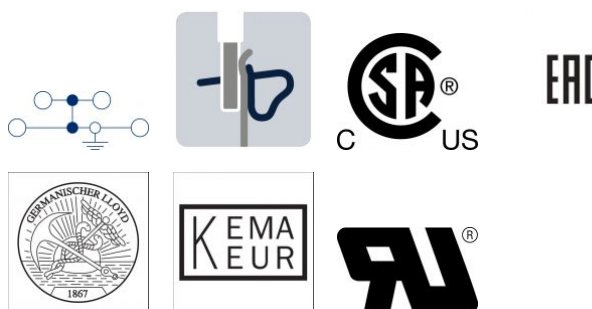

Protective-earth double-level terminal, Tension-spring connection, Mounting type: Mounting rail TS 35/7.5, Rated cross-section: 2.5 mm², Width: 5.1 mm, Colour: Green-yellow

Business data

Product description	Protective-earth double-level terminal
Packaging unit	100
Quantity unit	PC
Weight per piece (not including packaging)	17.8
Weight per piece (including packaging)	18.6
Unit of weight	G
Customs number	85369010
Country of origin	DE

3567.2

ZSLD 2,5 GNYE

ZSLD 2,5 GNYE

Technical Data

Dimensions

Length	83.6 mm
Width	5.1 mm
Height TS 35/7.5	53 mm

Ratings

Rated cross-section	2.5 mm ²
Overvoltage category	III
Contamination degree	3

3567.2

ZSLD 2,5 GNYE

ZSLD 2,5 GNYE

Technical Data

Connection data

Connection principle	Tension-spring connection
Connection position	Diagonal
Connections	4
Number of terminals per level	2
Number of levels	2
Levels internally bridged	✓
Wire cross-section single-core (rigid) / stranded, min.	0.5 mm ²
Wire cross-section single core (rigid)/stranded, max.	4 mm ²
Wire cross-section stranded, min.	0.5 mm ²
Wire cross-section stranded, max.	4 mm ²
Wire cross-section stranded with wire-end ferrules, min.	0.5 mm ²
Wire cross-section stranded with wire-end ferrules, max.	2.5 mm ²
Wire cross-section AWG, min.	20
Wire cross-section AWG, max.	12
Stripping length	10 mm

Materials

Insulation housing	Polyamide 6.6
Flammability class UL 94	V-0

3567.2

ZSLD 2,5 GNYE

ZSLD 2,5 GNYE

Technical Data

Materials

Working temperature, min.	-40 °C
---------------------------	--------

Working temperature, max.	120 °C
---------------------------	--------

Further technical data

Mounting type	Mounting rail TS 35/7,5
---------------	-------------------------

Gauge plug acc. to EN 60 947-1	A3
--------------------------------	----

End plate required	✓
--------------------	---

Number of test pick-off options	4
---------------------------------	---

3567.2

ZSLD 2,5 GNYE

ZSLD 2,5 GNYE

Approvals

Standards and regulations

EAC approval	TR ZU 004/2011
--------------	----------------

EAC approval granted	✓
----------------------	---

CSA approval

CSA approval	C22.2 No 158
--------------	--------------

CSA approval granted	✓
----------------------	---

CSA wire cross-section AWG, min.	20
----------------------------------	----

CSA wire cross-section AWG, max.	12
----------------------------------	----

CSA stripping length	10 mm
----------------------	-------

CSAus approval

CSAus approval	UL 1059
----------------	---------

CSAus approval granted	✓
------------------------	---

CSAus wire cross-section AWG, min.	20
------------------------------------	----

CSAus wire cross-section AWG, max.	12
------------------------------------	----

CSAus stripping length	10 mm
------------------------	-------

3567.2

ZSLD 2,5 GNYE

ZSLD 2,5 GNYE

Approvals

German Lloyd approval

GL approval	IEC 60947-7-2
GL approval granted	✓
GL wire cross-section single core (rigid), min.	2.5 mm ²
GL wire cross-section single-core (rigid), max.	4 mm ²
GL wire cross-section, min.	2.5 mm ²
GL wire cross-section stranded, max.	4 mm ²
GL environmental category	C

KEMA KEUR approval

KEMA KEUR approval	EN 60947-7-2
KEMA KEUR approval granted	✓
KEMA wire cross-section single core (rigid), min.	0.5 mm ²
KEMA wire cross-section single-core (rigid), max.	4 mm ²
KEMA wire cross-section stranded, min.	0.5 mm ²
KEMA wire cross-section stranded, max.	4 mm ²

3567.2

ZSLD 2,5 GNYE

ZSLD 2,5 GNYE

Approvals

UL Recognized


UL Recognized	UL 1059
UL Recognized granted	✓
UL wire cross-section single-core (rigid) AWG, min.	20
UL wire cross-section single-core (rigid) AWG, max.	12
UL wire cross-section stranded AWG, min.	20
UL wire cross-section stranded AWG, max.	12
UL wire material	Cu
UL factory wiring	✓
UL field wiring	✓

3567.2

ZSLD 2,5 GNYE

ZSLD 2,5 GNYE

Media

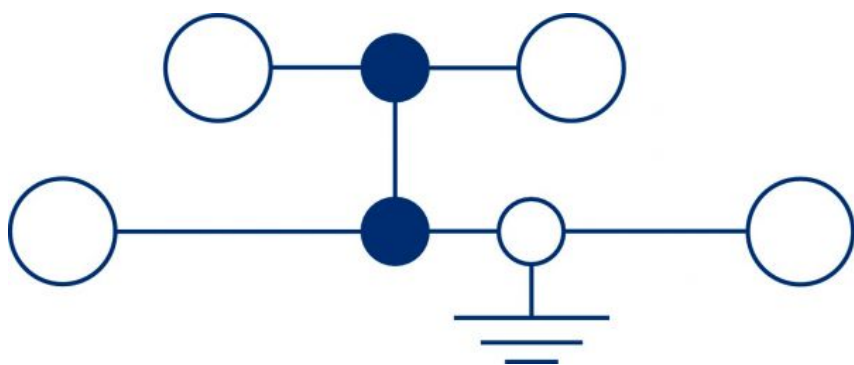

EAC



3567.2

ZSLD 2,5 GNYE

ZSLD 2,5 GNYE

Media




3567.2

ZSLD 2,5 GNYE

ZSLD 2,5 GNYE

Accessories

End plate

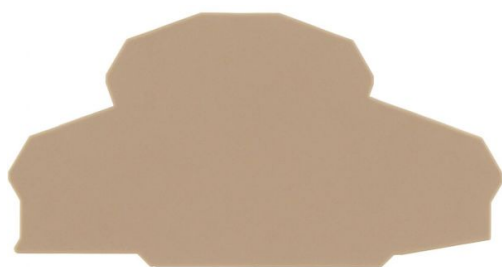

End plate, Width: 2 mm, Colour: Beige

In general

Order number	Article designation	GTIN (EAN)	Packaging unit
3756.2	ZAPD 2,5	4044211060664	20 PC

Actuating tool



Actuating tool, No. of poles: 1, Colour: Black

In general

Order number	Article designation	GTIN (EAN)	Packaging unit
3808.0	BWMA 1 (0,5 x 3,5 mm)	4044211078850	1 PC


3567.2

ZSLD 2,5 GNYE

ZSLD 2,5 GNYE

Accessories

Marking adapter




Label holder, Pitch size: 5.1 mm, Colour: beige

In general

Order number	Article designation	GTIN (EAN)	Packaging unit
3745.2	ZBA 1 BG	4044211060541	20 PC

End bracket

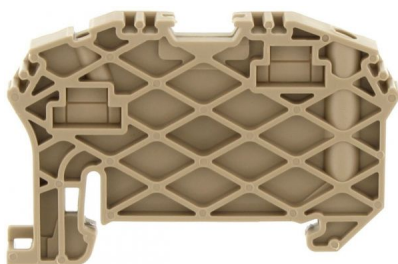

End stop, Mounting type: Mounting rail TS 35/7.5 and TS 35/15, Width: 6 mm, Colour: Beige

In general

Order number	Article designation	GTIN (EAN)	Packaging unit
3748.2	ZES 35	4044211060572	50 PC

3567.2

ZSLD 2,5 GNYE

ZSLD 2,5 GNYE

Accessories

Test adapter




Test adapter, Pitch size: 5.1 mm, Colour: Beige

In general

Order number	Article designation	GTIN (EAN)	Packaging unit
3740.2	ZTA 2,5	4044211060497	10 PC

Quick-marking



Terminal marker / Pocket Maxicard, Length: 5 mm,
Width: 5 mm, Colour: White

In general

Order number	Article designation	GTIN (EAN)	Packaging unit
4600.7	PMC SB 5/50 WH	4044211088903	500 PC

3567.2

ZSLD 2,5 GNYE

ZSLD 2,5 GNYE

Accessories

Fourfold-cover



Cover, Length: 6.7 mm, Width: 20.4 mm, Colour: Yellow

In general

Order number	Article designation	GTIN (EAN)	Packaging unit
3706.0	ZAD 2,5/4/B	4044211060244	20 PC
