


3589.2

ZSL 6/2A GNYE

ZSL 6/2A GNYE

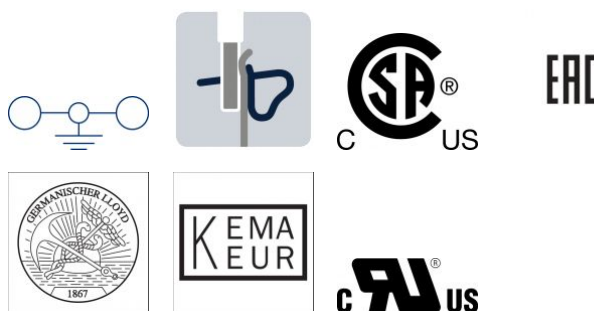

Protective earth terminal, Tension-spring connection, Mounting type: Mounting rail TS 35/7.5, Rated cross-section: 6 mm², Width: 8.1 mm, Colour: Green-yellow

Business data

Product description	Protective earth terminal
Packaging unit	100
Quantity unit	PC
Weight per piece (not including packaging)	21.4
Weight per piece (including packaging)	22
Unit of weight	G
Customs number	85369010
Country of origin	DE

3589.2

ZSL 6/2A GNYE

ZSL 6/2A GNYE

Technical Data

Dimensions

Length	65 mm
Width	8.1 mm
Height TS 35/7.5	47.5 mm

Ratings

Rated cross-section	6 mm ²
Overvoltage category	III
Contamination degree	3

3589.2

ZSL 6/2A GNYE

ZSL 6/2A GNYE

Technical Data

Connection data

Connection principle	Tension-spring connection
Connection position	Diagonal
Connections	2
Number of terminals per level	2
Number of levels	1
Wire cross-section single-core (rigid) / stranded, min.	0.5 mm ²
Wire cross-section single core (rigid)/stranded, max.	10 mm ²
Wire cross-section stranded, min.	0.5 mm ²
Wire cross-section stranded, max.	10 mm ²
Wire cross-section stranded with wire-end ferrules, min.	0.5 mm ²
Wire cross-section stranded with wire-end ferrules, max.	6 mm ²
Wire cross-section AWG, min.	22
Wire cross-section AWG, max.	8
Stripping length	13 mm

Materials

Insulation housing	Polyamide 6.6
Flammability class UL 94	V-0
Working temperature, min.	-40 °C

3589.2

ZSL 6/2A GNYE

ZSL 6/2A GNYE

Technical Data

Materials

Working temperature, max.	120 °C
---------------------------	--------

Further technical data

Mounting type	Mounting rail TS 35/7,5
---------------	-------------------------

Gauge plug acc. to EN 60 947-1	A5
--------------------------------	----

End plate required	✓
--------------------	---

Number of test pick-off options	2
---------------------------------	---

3589.2

ZSL 6/2A GNYE

ZSL 6/2A GNYE

Approvals

Standards and regulations

EAC approval	TR ZU 004/2011
--------------	----------------

EAC approval granted	✓
----------------------	---

CSA approval

CSA approval	C22.2 No 158
--------------	--------------

CSA approval granted	✓
----------------------	---

CSA wire cross-section AWG, min.	22
----------------------------------	----

CSA wire cross-section AWG, max.	8
----------------------------------	---

CSA stripping length	10 mm
----------------------	-------

CSAus approval

CSAus approval	UL 1059
----------------	---------

CSAus approval granted	✓
------------------------	---

CSAus wire cross-section AWG, min.	22
------------------------------------	----

CSAus wire cross-section AWG, max.	8
------------------------------------	---

CSAus stripping length	10 mm
------------------------	-------

3589.2

ZSL 6/2A GNYE

ZSL 6/2A GNYE

Approvals

cUL Recognized

cUL Recognized	C22.2 No 158
cUL Recognized	✓
cUL wire cross-section single-core (rigid) AWG, min.	22
cUL wire cross-section single-core (rigid) AWG, max.	8
cUL wire cross-section stranded AWG, min.	22
cUL wire cross-section stranded AWG, max.	8
cUL wire material	Cu

German Lloyd approval

GL approval	IEC 60947-7-2
GL approval granted	✓
GL wire cross-section single core (rigid), min.	6 mm ²
GL wire cross-section single-core (rigid), max.	10 mm ²
GL wire cross-section, min.	6 mm ²
GL wire cross-section stranded, max.	10 mm ²
GL environmental category	C

3589.2

ZSL 6/2A GNYE

ZSL 6/2A GNYE

Approvals

KEMA KEUR approval

KEMA KEUR approval	EN 60947-7-2
KEMA KEUR approval granted	✓
KEMA wire cross-section single core (rigid), min.	0.5 mm ²
KEMA wire cross-section single-core (rigid), max.	10 mm ²
KEMA wire cross-section stranded, min.	0.5 mm ²
KEMA wire cross-section stranded, max.	10 mm ²

UL Recognized

UL Recognized	UL 1059
UL Recognized granted	✓
UL wire cross-section single-core (rigid) AWG, min.	22
UL wire cross-section single-core (rigid) AWG, max.	8
UL wire cross-section stranded AWG, min.	22
UL wire cross-section stranded AWG, max.	8
UL wire material	Cu
UL factory wiring	✓
UL field wiring	✓

3589.2

ZSL 6/2A GNYE

ZSL 6/2A GNYE

Media



EAC



3589.2

ZSL 6/2A GNYE

ZSL 6/2A GNYE

Media

The logo for CRAUS, consisting of the letters 'C', 'R', 'A', 'U', and 'S' in a bold, black, sans-serif font. The 'R' and 'A' are stylized and connected. A registered trademark symbol (®) is located to the upper right of the 'A'.


3589.2

ZSL 6/2A GNYE

ZSL 6/2A GNYE

Accessories

End plate

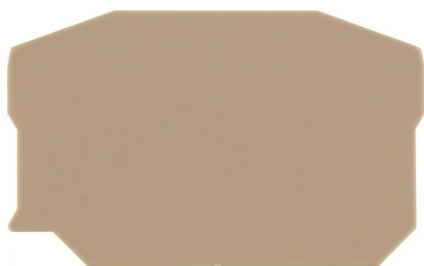


End plate, Width: 2 mm, Colour: Beige

In general

Order number	Article designation	GTIN (EAN)	Packaging unit
3760.2	ZAP 6/2A	4044211060817	20 PC

End bracket

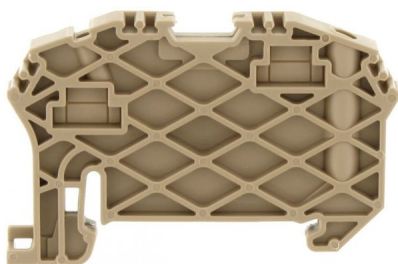

End stop, Mounting type: Mounting rail TS 35/7.5 and TS 35/15, Width: 6 mm, Colour: Beige

In general

Order number	Article designation	GTIN (EAN)	Packaging unit
3748.2	ZES 35	4044211060572	50 PC

3589.2

ZSL 6/2A GNYE

ZSL 6/2A GNYE

Accessories

Test adapter




Test adapter, Pitch size: 8.1 mm, Colour: Beige

In general

Order number	Article designation	GTIN (EAN)	Packaging unit
3772.2	ZTA 6	4044211060985	10 PC

Quick-marking



Terminal marker / Pocket Maxicard, Length: 5 mm,
Width: 8 mm, Colour: White

In general

Order number	Article designation	GTIN (EAN)	Packaging unit
9323.7	PMC SB 8/40 WH	4044211129231	400 PC

3589.2

ZSL 6/2A GNYE

ZSL 6/2A GNYE

Accessories

Screw driver



Screwdriver with bare blade, Colour: Black-grey

In general

Order number	Article designation	GTIN (EAN)	Packaging unit
1087.0	SDB 0,8x4,0	4044211014803	1 PC

Fourfold-cover



Cover, Length: 10.5 mm, Width: 32.4 mm, Colour: Yellow

In general

Order number	Article designation	GTIN (EAN)	Packaging unit
3708.0	ZAD 6/4/B	4044211060268	20 PC
