


3664.2

ZSLS 2,5/4S GNYE

ZSLS 2,5/4S GNYE



EAC



Protective earth terminal, Plug-in connection, Mounting type: Mounting rail TS 35/7.5, Width: 5.1 mm, Colour: Green-yellow

Business data

Product description	Protective earth terminal
Packaging unit	100
Quantity unit	PC
Weight per piece (not including packaging)	13.76
Weight per piece (including packaging)	13.96
Unit of weight	G
Customs number	85369010
Country of origin	DE

3664.2

ZSLS 2,5/4S GNYE

ZSLS 2,5/4S GNYE

Technical Data

Dimensions

Length	90.5 mm
Width	5.1 mm
Height	38.5 mm
Height TS 35/7.5	39.5 mm
Pitch	5 mm

Ratings

Overvoltage category	III
Contamination degree	3

Connection data

Connection principle	Plug in
Connection position	Top
Connections	4
Number of terminals per level	4
Number of levels	1

3664.2

ZSLS 2,5/4S GNYE

ZSLS 2,5/4S GNYE

Technical Data

Materials

Insulation housing	Polyamide 6.6
Flammability class UL 94	V-0
Working temperature, min.	-40 °C
Working temperature, max.	120 °C

Further technical data

Mounting type	Mounting rail TS 35/7,5
Number of cross-connection channels	1
End plate required	✓

3664.2

ZSLS 2,5/4S GNYE

ZSLS 2,5/4S GNYE

Approvals

Standards and regulations

EAC approval	TR ZU 004/2011
--------------	----------------

EAC approval granted	✓
----------------------	---

CSA approval

CSA approval	C22.2 No 158
--------------	--------------

CSA approval granted	✓
----------------------	---

CSAus approval

CSAus approval	UL 1059
----------------	---------

CSAus approval granted	✓
------------------------	---

cUL Recognized

cUL Recognized	C22.2 No 158
----------------	--------------

cUL Recognized	✓
----------------	---

cUL wire material	Cu
-------------------	----

3664.2

ZSLS 2,5/4S GNYE

ZSLS 2,5/4S GNYE

Approvals

KEMA KEUR approval

KEMA KEUR approval	EN 60947-7-2
--------------------	--------------

KEMA KEUR approval granted	✓
----------------------------	---

UL Recognized

UL Recognized	UL 1059
---------------	---------

UL Recognized granted	✓
-----------------------	---

UL wire material	Cu
------------------	----

UL factory wiring	✓
-------------------	---


UL field wiring	✓
-----------------	---

3664.2

ZSLS 2,5/4S GNYE

ZSLS 2,5/4S GNYE

Media

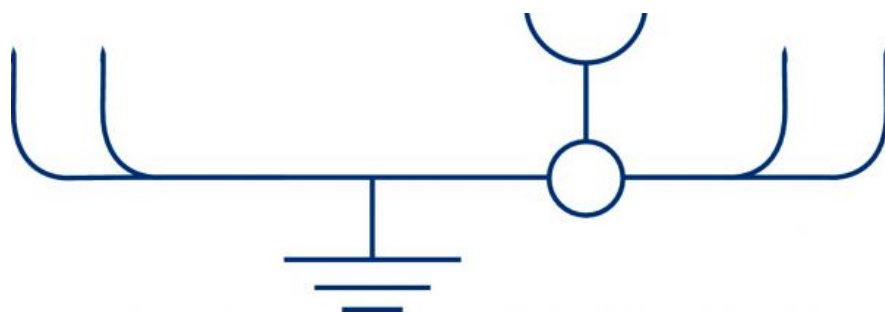

EAC




3664.2

ZSLS 2,5/4S GNYE

ZSLS 2,5/4S GNYE

Accessories

End plate

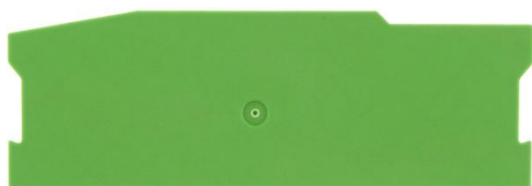

End plate, Width: 1.5 mm, Colour: Green

In general

Order number	Article designation	GTIN (EAN)	Packaging unit
3692.1	ZAPS 2,5/4S	4044211185886	50 PC

Actuating tool



Actuating tool, No. of poles: 1, Colour: Black

In general

Order number	Article designation	GTIN (EAN)	Packaging unit
3808.0	BWMA 1 (0,5 x 3,5 mm)	4044211078850	1 PC


3664.2

ZSLS 2,5/4S GNYE

ZSLS 2,5/4S GNYE

Accessories

Coding



Coding, Colour: Orange

In general

Order number	Article designation	GTIN (EAN)	Packaging unit
3689.3	ZST-C	4044211177805	50 PC

End bracket



End stop, Mounting type: Mounting rail TS 35/7.5 and TS 35/15, Width: 5 mm, Colour: Beige

In general

Order number	Article designation	GTIN (EAN)	Packaging unit
3811.2	ZES 35/2	4044211080600	50 PC


3664.2

ZSLS 2,5/4S GNYE

ZSLS 2,5/4S GNYE

Accessories

Quick-marking



Terminal marker / Pocket Maxicard, Length: 5 mm,
Width: 5 mm, Colour: White

In general

Order number	Article designation	GTIN (EAN)	Packaging unit
4600.7	PMC SB 5/50 WH	4044211088903	500 PC

Mechanical latch



Locking mechanism, Colour: Orange

In general

Order number	Article designation	GTIN (EAN)	Packaging unit
3687.3	ZST-V	4044211177911	50 PC

3664.2

ZSLS 2,5/4S GNYE

ZSLS 2,5/4S GNYE

Accessories

Mechanical latch



Locking mechanism, Colour: Orange

In general

Order number	Article designation	GTIN (EAN)	Packaging unit
3690.3	ZST-V-I	4044211185244	50 PC
