


3714.4

ZQI 2,5/6 BK

ZQI 2,5/6 BK

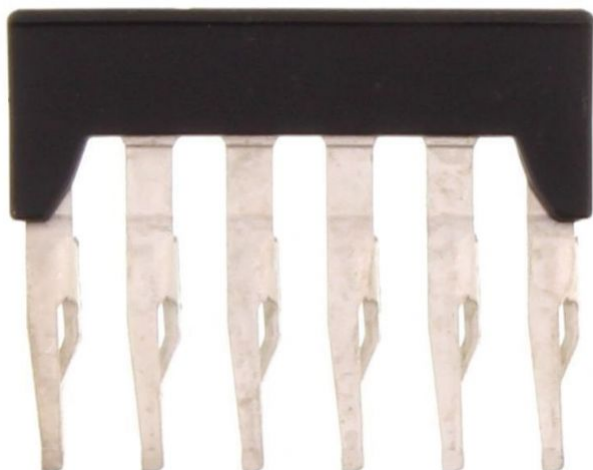

Insulated cross-connector, No. of poles: 6, Mounting type: Plug in, Width: 29.5 mm, Rated cross-section: 2.5 mm², Colour: Black

Business data

Product description	Insulated cross-connector
Packaging unit	20
Quantity unit	PC
Weight per piece (not including packaging)	3.4
Weight per piece (including packaging)	3.46
Unit of weight	G
Customs number	85389099
Country of origin	DE

3714.4

ZQI 2,5/6 BK

ZQI 2,5/6 BK

Technical Data

Dimensions

Length	4.5 mm
Width	29.5 mm
Pitch size	5 mm

Ratings

Voltage with partition, max.	800 V
Voltage without partition, max.	800 V
Rated current	24 A
Rated cross-section	2.5 mm ²
Contamination degree	3

Connection data

No. of poles	6
--------------	---

3714.4

ZQI 2,5/6 BK

ZQI 2,5/6 BK

Technical Data

Materials

Material	Copper alloy
Surface	Tin-plated
Insulation housing	Polyamide 6.6
Flammability class UL 94	V-2
Working temperature, min.	-40 °C
Working temperature, max.	105 °C

Further technical data

Mounting type	Plug in
Insulation available	✓
Touch protection is available	✓
Number of bridged terminals	6