



5450.2

RM 1-1W/24V DC

RM 1-1W/24V DC

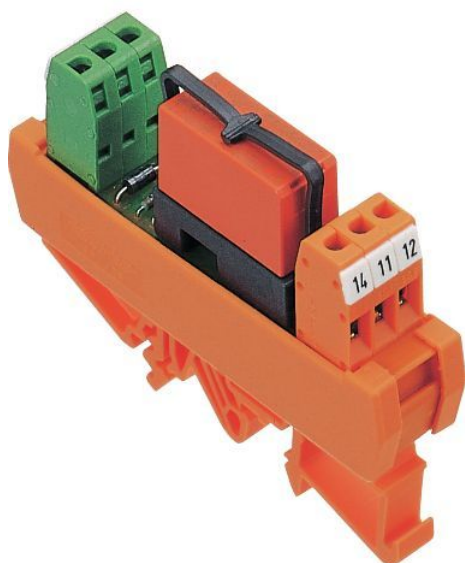

Relay module, Screw connection, 1 CO contact, Plugged in, Input voltage: 24 VDC

Business data

Product description	Relay module
Packaging unit	1
Quantity unit	PC
Weight per piece (not including packaging)	49.5
Weight per piece (including packaging)	60.72
Unit of weight	G
Customs number	85364900
Country of origin	EEC

5450.2

RM 1-1W/24V DC

RM 1-1W/24V DC

Technical Data

Dimensions

Length	87 mm
Width	20 mm
Height	72 mm

Ratings

Overvoltage category	III
Contamination degree	2

Connection data

Connection principle	Screw connection
Wire cross-section single core (rigid), min.	0.08 mm ²
Wire cross-section single-core (rigid), max.	4 mm ²
Wire cross-section stranded, min.	0.2 mm ²
Wire cross-section stranded, max.	2.5 mm ²
Wire cross-section stranded with wire-end ferrules, min.	0.2 mm ²
Wire cross-section stranded with wire-end ferrules, max.	2.5 mm ²
Stripping length	7 mm
Torque	0.6 Nm

Input data

Input voltage	24 VDC
Number of channels	1
Power consumption	0,6 W
reverse-polarity protection diode	✓

Output data

Switching voltage / switching voltage max.	250 / 250 VAC
Continuous current max. / Inrush current max.	6 / 10 A

Contact material © CONTA-CLIP Verbindungstechnik GmbH, D-33110 Dettmolden-Str. 7 | D-33161 Hövelhof
Fon +49 (0) 52 57 98 33 0 | Fax +49 (0) 52 57 98 33 33 | E-Mail info@conta-clip.de | conta-clip.de

Contact configuration **1 CO contact**

Switching capacity, max.

Creation date 08.06.2020 10:34:00
Subject to technical modifications
2000 VA

Output data
Datasheet



Electrical lifespan (AC1) 5x10⁶

Mechanical lifespan 20x10⁶

RM 1-1W/24V DC

Materials

RM 1-1W/24V DC

Working temperature, min. -20 °C

Working temperature, max. 55 °C

Technical Data

5450.2

RM 1-1W/24V DC

RM 1-1W/24V DC

Technical Data

Further technical data

Protection class	IP20
Insulation voltage coil/contact	4 kV
Status display red	✓
Free-wheel diode	✓
Response/release time	9 / 7 ms
Pinning	5 mm
Pluggable relay	✓

5450.2

RM 1-1W/24V DC

RM 1-1W/24V DC

Approvals

Standards and regulations

CE compliant

✓

Standards / specifications

DIN VDE 0110 / EN 50178

5450.2

RM 1-1W/24V DC

RM 1-1W/24V DC

Media

