



6155.2

RIM8/2W/24V+

RIM8/2W/24V+

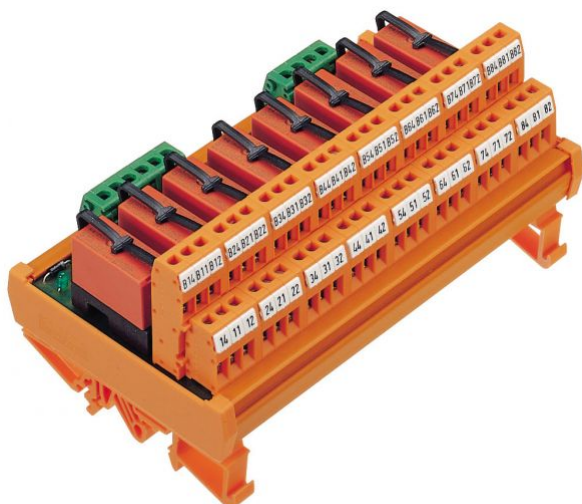

Multiple relay module, Screw connection, With 8 miniature relays, 2 CO contacts each, Plugged in, With illuminated display, Positive switching, Input voltage: 24 VDC

Business data

Product description	Relay module
Packaging unit	1
Quantity unit	PC
Weight per piece (not including packaging)	385.2
Weight per piece (including packaging)	459
Unit of weight	G
Customs number	85364900
Country of origin	EEC

6155.2

RIM8/2W/24V+

RIM8/2W/24V+

Technical Data

Dimensions

Length	87 mm
Width	151 mm
Height	72 mm

Ratings

Overvoltage category	III
Contamination degree	2

Connection data

Connection principle	Screw connection
Wire cross-section single core (rigid), min.	0.08 mm ²
Wire cross-section single-core (rigid), max.	4 mm ²
Wire cross-section stranded, min.	0.2 mm ²
Wire cross-section stranded, max.	2.5 mm ²
Wire cross-section stranded with wire-end ferrules, min.	0.2 mm ²
Wire cross-section stranded with wire-end ferrules, max.	2.5 mm ²
Stripping length	7 mm
Torque	0.6 Nm

Input data

Input voltage	24 VDC
Number of channels	8
Plus switching (source)	✓
Power consumption	0,5 W
reverse-polarity protection diode	✓

Output data

Switching voltage / switching voltage max.	250 / 250 VAC
--	---------------

Continuous current max. 40 A
© CONTA CLIP Vertikalingstechnik GmbH | Böhler-Hahn-Str. 7 | D-33161 Hövelhof
Fon +49 (0) 52 57 98 33 0 | Fax +49 (0) 52 57 98 33 33 | E-Mail info@conta-clip.de | conta-clip.de

Contact material AgNi 90/10

Contact configuration 2 CO contacts

Creation date 09.06.2020 12:15:10

Subject to technical changes

Output data Datasheet



Switching capacity, max. 1250 VA

Electrical lifespan (AC1) 20x10⁶

Mechanical lifespan 10x10⁶

Materials

Storage temperature, min. -20 °C

Working temperature, max. 55 °C

Further technical data

Protection class IP20

Insulation voltage coil/contact 4 kV

Status display red ✓

Free-wheel diode ✓

Response/release time 9 / 7 ms

Pinning 5 mm

Operating voltage indicator LED ✓

Pluggable relay ✓

6155.2

RIM8/2W/24V+

RIM8/2W/24V+

Approvals

Standards and regulations

CE compliant

✓

Standards / specifications

DIN VDE 0110 / EN 50178

6155.2

RIM8/2W/24V+

RIM8/2W/24V+

Media

