



## 7786.2 SSOIF 4+ SSOIF 4+

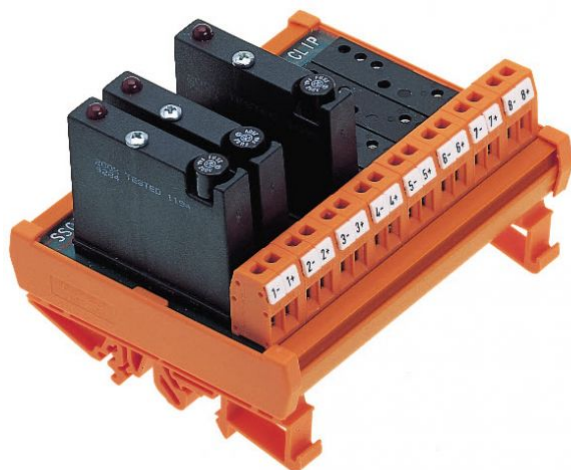

Multiple solid-state output modules for G4 SSR relays, Screw connection, Mounting type: Mounting rail TS 35, 4 channels, Positive switching, Delivered without SSR relay

### Business data

Product description	Solid-state output module
Packaging unit	1
Quantity unit	PC
Weight per piece (not including packaging)	81.2
Weight per piece (including packaging)	138.6
Unit of weight	G
Customs number	85365003
Country of origin	EEC

## 7786.2 SSOIF 4+ SSOIF 4+

### Technical Data

---

#### Dimensions

---

Length	87 mm
Width	60 mm
Height	57 mm

#### Ratings

---

Overvoltage category	III
Contamination degree	2

#### Connection data

---

Connection principle	Screw connection
Wire cross-section single core (rigid), min.	0.2 mm <sup>2</sup>
Wire cross-section single-core (rigid), max.	4 mm <sup>2</sup>
Wire cross-section stranded, min.	0.2 mm <sup>2</sup>
Wire cross-section stranded, max.	2.5 mm <sup>2</sup>
Wire cross-section stranded with wire-end ferrules, min.	0.2 mm <sup>2</sup>
Wire cross-section stranded with wire-end ferrules, max.	2.5 mm <sup>2</sup>
Stripping length	7 mm
Torque	0.6 Nm

#### Input data

---

Number of channels	4
--------------------	---

#### Materials

---

Working temperature, min.	-20 °C
Working temperature, max.	55 °C

#### Further technical data

---

Remarks	+ schaltend
Test voltage	4 kV

© CONTA-CLIP Verbindungstechnik GmbH | Otto-Hahn-Str. 7 | D-33161 Hovelhof  
Fon +49 (0) 52 57.98 33-0 | Fax +49 (0) 52 57.98 33-33 | E-Mail info@conta-clip.de | conta-clip.de

Creation date 09.06.2020 12:01:16  
Subject to technical modifications

7786.2

SSOIF 4+

SSOIF 4+

## Approvals

---

## Standards and regulations

---

Standards / specifications

DIN VDE 0110 / EN 50178

---

7786.2

SSOIF 4+

SSOIF 4+

Media

---

