



7788.2

SSOIF 16+

SSOIF 16+

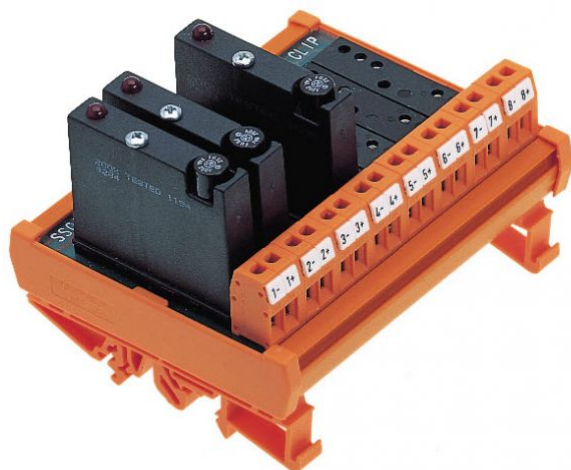

Multiple solid-state output modules for G4 SSR relays, Screw connection, Mounting type: Mounting rail TS 35, 16 channels, Positive switching, Delivered without SSR relay

Business data

Product description	Solid-state output module
Packaging unit	1
Quantity unit	PC
Weight per piece (not including packaging)	269.9
Weight per piece (including packaging)	375.3
Unit of weight	G
Customs number	85365003
Country of origin	EEC

7788.2 SSOIF 16+ SSOIF 16+

Technical Data

Dimensions

Length	87 mm
Width	212 mm
Height	57 mm

Ratings

Overvoltage category	III
Contamination degree	2

Connection data

Connection principle	Screw connection
Wire cross-section single core (rigid), min.	0.2 mm ²
Wire cross-section single-core (rigid), max.	4 mm ²
Wire cross-section stranded, min.	0.2 mm ²
Wire cross-section stranded, max.	2.5 mm ²
Wire cross-section stranded with wire-end ferrules, min.	0.2 mm ²
Wire cross-section stranded with wire-end ferrules, max.	2.5 mm ²
Stripping length	7 mm
Torque	0.6 Nm

Input data

Number of channels	16
--------------------	----

Materials

Working temperature, min.	-20 °C
Working temperature, max.	55 °C

Further technical data

Remarks	+ schaltend
Test voltage	4 kV

© CONTA-CLIP Verbindungstechnik GmbH | Otto-Hahn-Str. 7 | D-33161 Hovelhof
Fon +49 (0) 52 57.98 33-0 | Fax +49 (0) 52 57.98 33-33 | E-Mail info@conta-clip.de | conta-clip.de

Creation date 09.06.2020 12:14:54
Subject to technical modifications

7788.2

SSOIF 16+

SSOIF 16+

Approvals

Standards and regulations

Standards / specifications

DIN VDE 0110 / EN 50178

7788.2

SSOIF 16+

SSOIF 16+

Media

