




**CUI INC**

9615 SW Allen, Suite 103  
 Beaverton, OR 97005  
 Phone: (503) 643-4899  
 800-275-4899  
 Fax: (503) 372-1266  
 Website: www.cui.com

1	NOMINAL SIZE	40.1x40.1x14.5H		mm.	inch.
2	IMPEDANCE	8 $\Omega \pm 15\%$	at 1K Hz. 1 V.		
3	RESONANCE FO	270 Hz $\pm$ 54 Hz.	FO Hz. 1 V.		
4	S.P. LEVEL	88 dB/w $\pm$ 3 dB	1 w 50 cm average at		
5	RESPONSE	Fo Hz~ 20K Hz	MAX 10 dB	400,500,600,800 Hz.	
6	CROSSOVER FREQ.	Hz	Hz	dB/OCT	Net work
7	INPUT POWER	Nominal input	4 w.	Handling Capacity	6 w.
8	OPERATION	Must be normal at program source 4 w.			
9	BUZZ, RATTLE, ETC.	Must be normal at Since Wave 5.67 V.			
10	FLUX DENSITY	Gauss $\pm 10\%$			
11	TOTAL FLUX	Max well min			
12	MAGNET	Size	24.6 x 3.5	mm	gr oz
13	TOTAL WEIGHT	gr oz			
14	LOAD TEST	After test meet Item 9 and 10	White noise	4 W.	24 Hours
15	DISTORTION	% MAX Hz W.			
16	HEAT TEST	After test meet Item 9 and 10	60 $\pm 2$ $\pm$ $^{\circ}$ C	20-50 %R. H	24 Hours
17	HUMIDITY TEST	After test meet Item 9 and 10	40 $\pm 2$ $\pm$ $^{\circ}$ C	90-95 %R. H	24 Hours


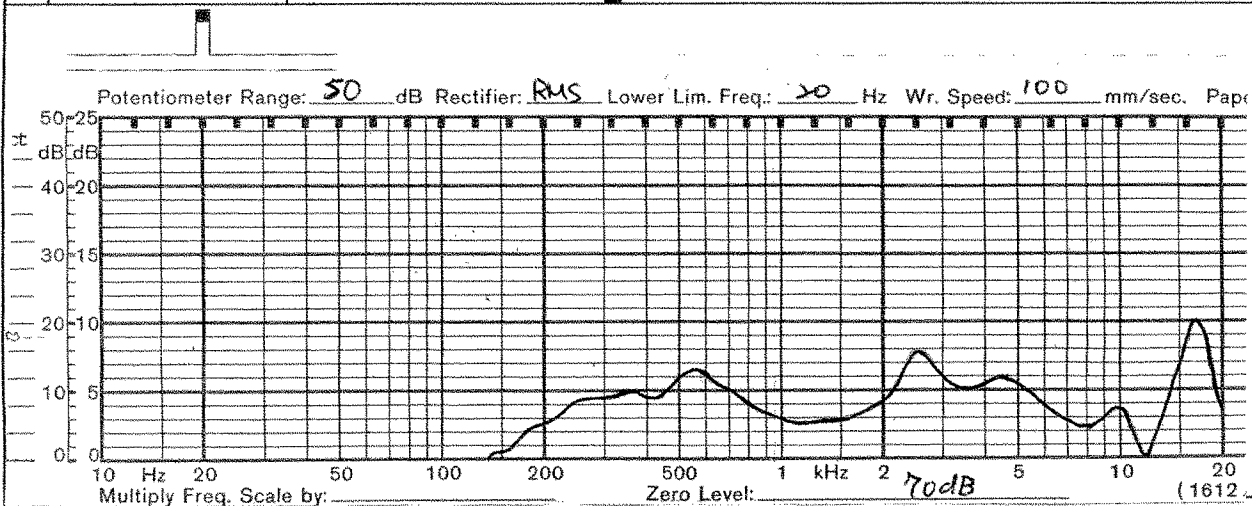


PART NO.	CMS0401KL-1X	UNITS:	mm
TOLERANCE:	$\pm 1.5$	PAGE NO:	1 of 2



CUI INC

9615 SW Allen, Suite 103  
Beaverton, OR 97005  
Phone: (503) 643-4899  
800-275-4899  
Fax: (503) 372-1266  
Website: www.cui.com

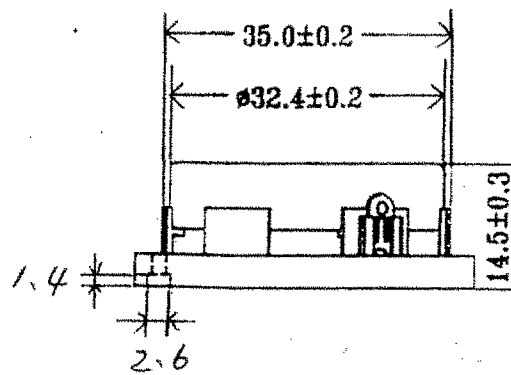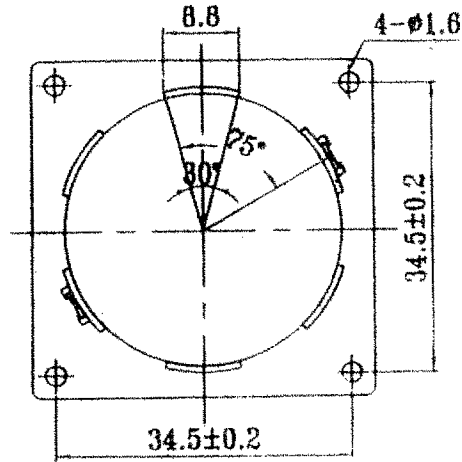

PART NO.	CMS0401KL-1X	UNITS:	mm
TOLERANCE:	$\pm 1.5$	PAGE NO:	2 of 2