




CUI INC

9615 SW Allen, Suite 103
 Beaverton, OR 97005
 Phone: (503) 643-4899
 800-275-4899
 Fax: (503) 372-1266
 Website: www.cui.com

1	NOMINAL SIZE	40.1x40.1x14.5H mm.		inch.	
2	IMPEDANCE	8 $\Omega \pm 15\%$	at 1K Hz.		1 V.
3	RESONANCE FO	440 Hz \pm 88 Hz.	FO Hz.		1 V.
4	S.P. LEVEL	88 dB/w \pm 3 dB	1 w 50 cm average at		
5	RESPONSE	Fo Hz~ 20K Hz	MAX 10 dB	600, 800, 1K, 1.2K Hz.	
6	CROSSOVER FREQ.	Hz	Hz	dB/OCT	Net work
7	INPUT POWER	Nominal input 5 w.	Handling Capacity 8 w.		
8	OPERATION	Must be normal at program source		5 w.	
9	BUZZ, RATTLE, ETC.	Must be normal at Since Wave 6.32		V.	
10	FLUX DENSITY	Gauss $\pm 10\%$			
11	TOTAL FLUX	Max well min			
12	MAGENET	Size 24.6x3.5 mm	gr	oz	
13	TOTAL WEIGHT		gr	oz	
14	LOAD TEST	After test meet Item 9 and 10	White noise	5 W.	24 Hours
15	DISTORTION	% MAX		Hz	W.
16	HEAT TEST	After test meet Item 9 and 10	65 ± 2 \pm $^{\circ}$ C	20-50 %R. H	24 Hours
17	HUMIDITY TEST	After test meet Item 9 and 10	40 ± 2 \pm $^{\circ}$ C	90-95 %R. H	24 Hours


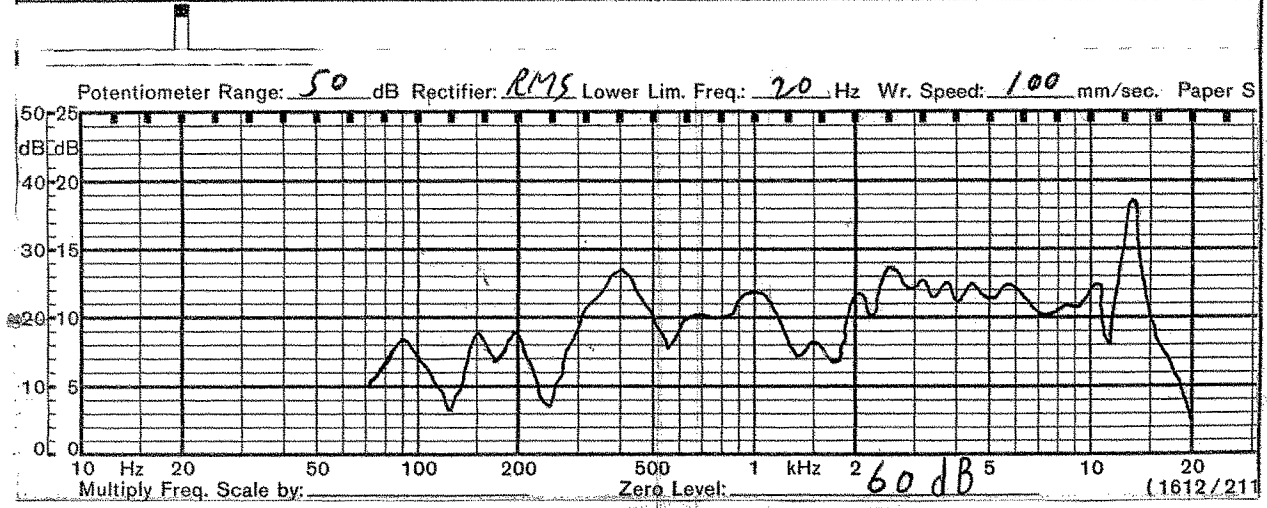


PART NO.	CMS0401KL-3X	UNITS:	mm
TOLERANCE:	± 1.5	PAGE NO:	1 of 2



CUI INC

9615 SW Allen, Suite 103
Beaverton, OR 97005
Phone: (503) 643-4899
800-275-4899
Fax: (503) 372-1266
Website: www.cui.com

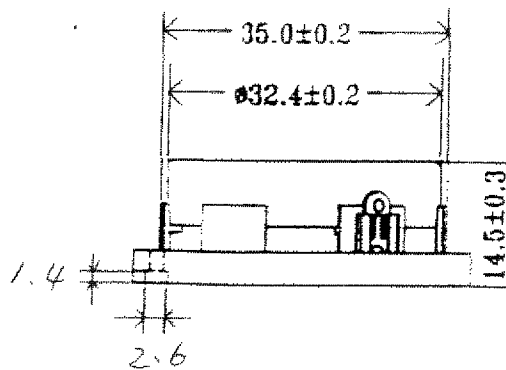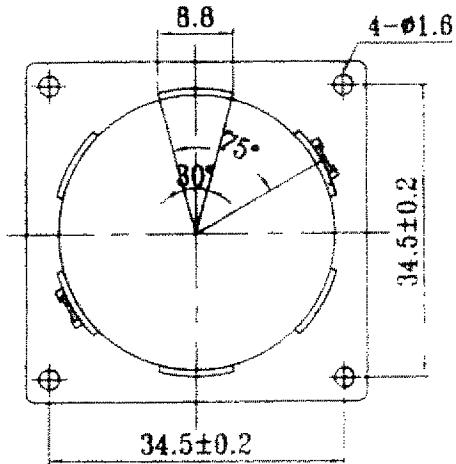

PART NO.	CMS0401KL-3X	UNITS:	mm
TOLERANCE:	±1.5	PAGE NO:	2 of 2