





9615 SW Allen, Suite 103  
 Beaverton, OR 97005  
 Phone: (503) 643-4899  
 800-275-4899  
 Fax: (503) 372-1266  
 Website: www.cui.com

# Specifications

1	Part No.	GC0351M			
2	Nominal Size	16 x 35 mm.	inch		
3	Impedance	8 $\Omega$ $\pm$ 15%	at	1.5K Hz.	1 V.
4	Resonance	650 Hz. $\pm$ 130 Hz.	FO Hz.	1 V.	
5	S.P. Level	81 dB $\pm$ 3 dB	0.5 w. 50 cm. average at		
6	Response	fo Hz. $\sim$ 20K Hz. MAX 10dB	800, 1K, 1.2K, 1.5K Hz.		
7	Crossover Freq.	Hz.	Hz.	dB/OCT	Net work
8	Input Power	Nominal Input	1 w.	Handling Capacity	1.5 w.
9	Operation	Must be normal at program source			1 w.
10	Buzz, Rattle, etc.	Must be normal at sine wave			2.83 v.
11	Flux Density	Gauss $\pm$ 10%			
12	Total Flux	Max well min			
13	Magnet	Size	7.9 x 1.3 mm	gr	oz
14	Total Weight	gr oz			
15	Load Test	After test meet item 9 and 10	White noise	1 W.	24 Hours
16	Distortion	% MAX Hz W.			
17	Heat Test	After test meet item 9 and 10	60 $\pm$ 2 $\pm$ $^{\circ}$ C	20-50 %R.H.	24 Hours
18	Humidity Test	After test meet item 9 and 10	40 $\pm$ 2 $\pm$ $^{\circ}$ C	90-95 %R.H.	24 Hours

PART NO.	GC0351M	UNITS:	mm
DRAWN BY:		PAGE NO:	1 of 2

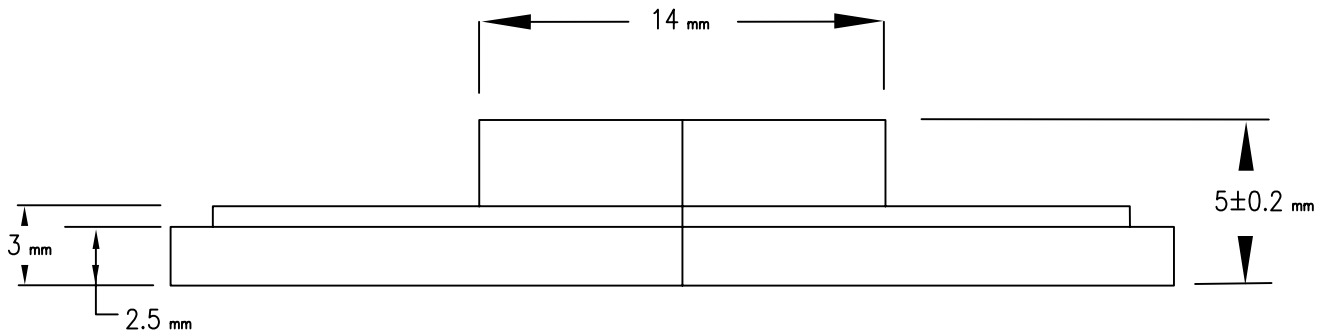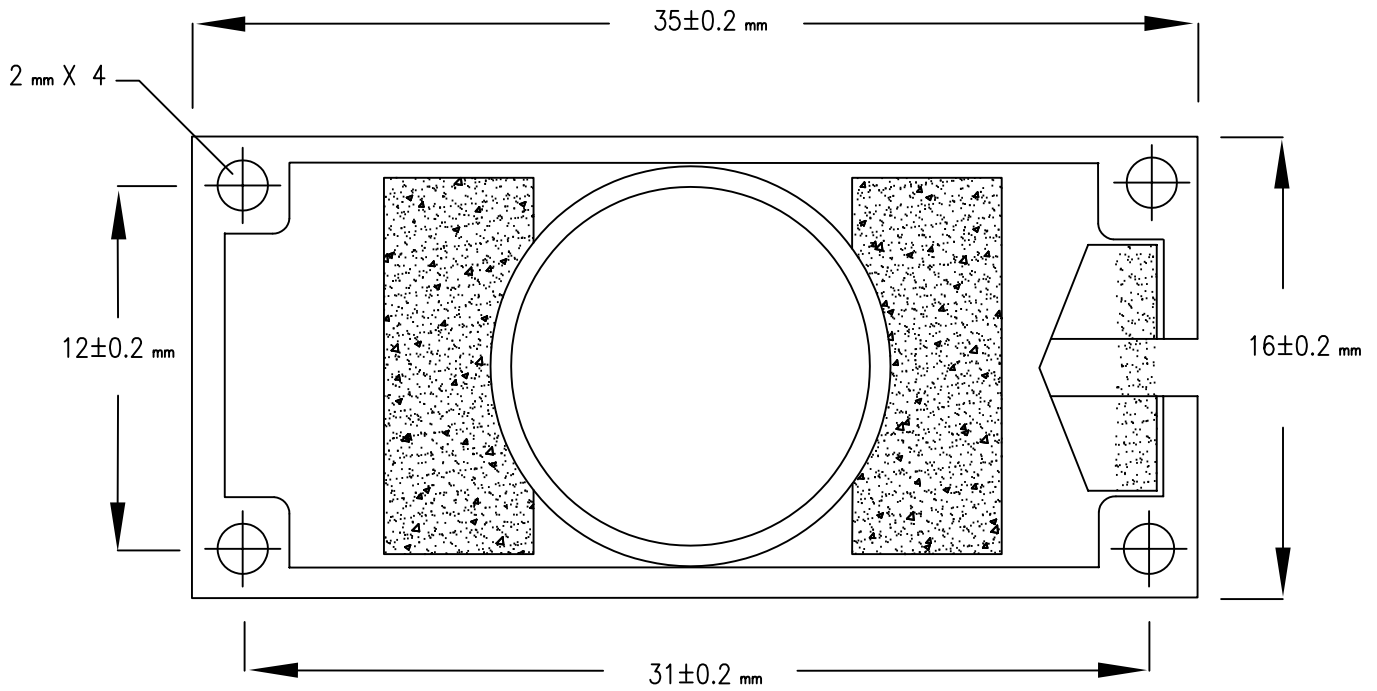

**CUI INC**

9615 SW Allen, Suite 103  
 Beaverton, OR 97005  
 Phone: (503) 643-4899  
 800-275-4899  
 Fax: (503) 372-1266  
 Website: www.cui.com

TITLE:

PART NO.

GC0351M

UNITS:

mm

DRAWN BY:

Page No.

2 of 2