





9615 SW Allen, Suite 103
 Beaverton, OR 97005
 Phone: (503) 643-4899
 800-275-4899
 Fax: (503) 372-1266
 Website: www.cui.com

Specifications

1	Part No.	GF0571					
2	Nominal Size	57 mm.			2 - 1/4 inch		
3	Impedance	8Ω ± 15%	at	800 Hz.	1 V.		
4	Resonance	380 Hz. ± 76 Hz.		F0 Hz.	1 V.		
5	S.P. Level	86 dB/W	3 dB	0.25 w. 50 cm. average at			
6	Response	fo Hz. ~ 8.1K Hz.	MAX 10dB	1K, 1.4K, 1.7K, 2K Hz.			
7	Crossover Freq.	Hz.	Hz.	dB/OCT		Net work	
8	Input Power	Nominal Input	0.25 w.	Handling Capacity	0.5 w.		
9	Operation	Must be normal at program source			0.25 w.		
10	Buzz, Rattle, etc.	Must be normal at sine wave			1.41 v.		
11	Flux Density	Gauss ± 10%					
12	Total Flux	Max well min					
13	Magnet	Size	32 x 18 x 6 mm	gr	oz		
14	Total Weight				gr	oz	
15	Load Test	After test meet item 9 and 10	White noise	0.25 W.	5 Hours		
16	Distortion	% MAX		Hz	W.		
17	Heat Test	After test meet item 9 and 10	70±2 ±°C	20-50 %R.H.	5 Hours		
18	Humidity Test	After test meet item 9 and 10	40±2 ±°C	90-95 %R.H.	5 Hours		

PART NO.	GF0571	UNITS:	mm
DRAWN BY:		PAGE NO:	1 of 2

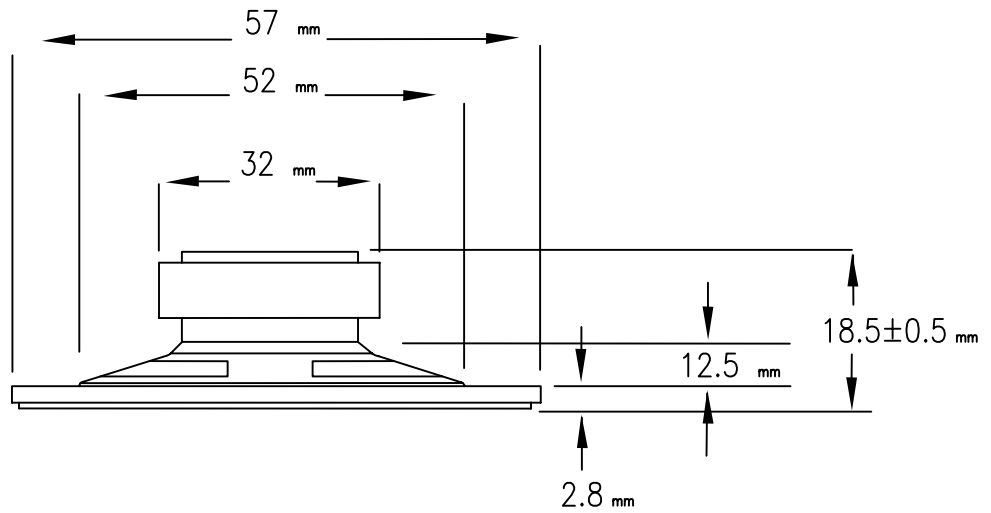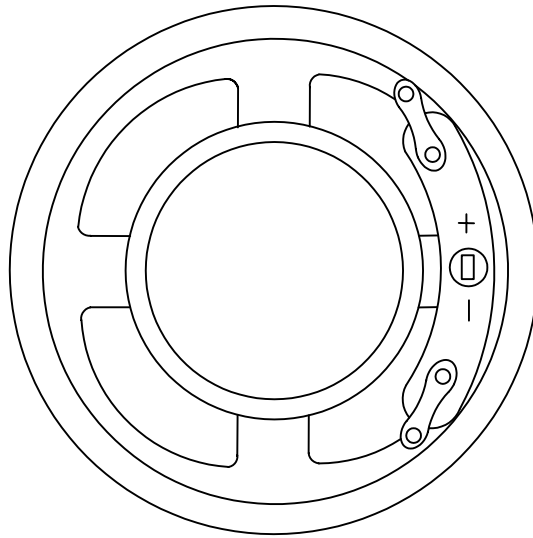

CUI INC

9615 SW Allen, Suite 103
 Beaverton, OR 97005
 Phone: (503) 643-4899
 800-275-4899
 Fax: (503) 372-1266
 Website: www.cui.com

TITLE:

PART NO.

GF0571

UNITS:

mm

DRAWN BY:

Page No.

2 of 2