



REV.	DESCRIPTION	DATE
A	NEW DRAWING	9/8/2008
B	CORRECTED RATING TYPO	01/09/2015



TOLERANCE:  
±0.3mm  
UNLESS OTHERWISE SPECIFIED

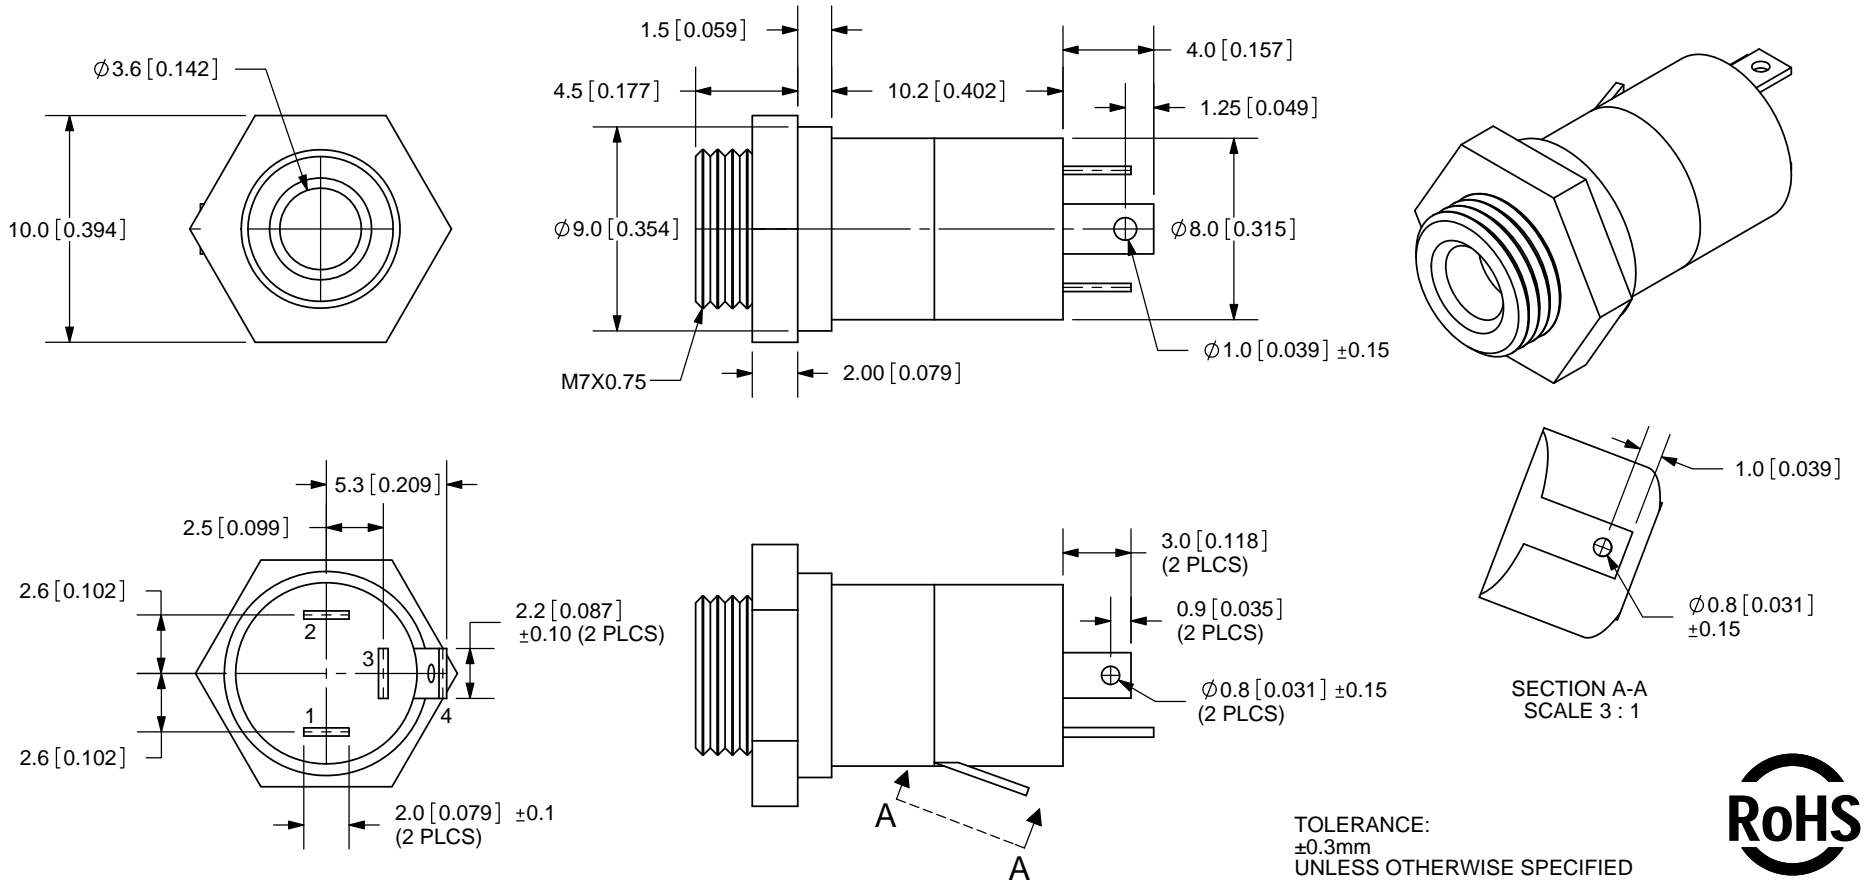

**△** SPECIFICATIONS:  
 RATING: 16VDC @ 20mA~0.3A  
 CONTACT RESISTANCE: 50m OHMS MAX  
 INSULATION RESISTANCE: 100M OHMS MIN: 500V DC  
 VOLTAGE WITHSTAND: 500V AC R.M.S. FOR 1 MINUTE  
 LIFE: 5,000 CYCLES

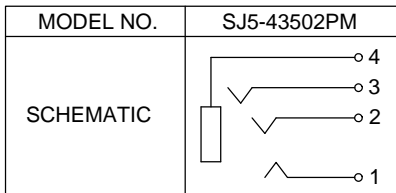

	MATERIAL	PLATING
HEX NUT	Steel	Nickel
TERMINAL 1	Copper Alloy	Gold
TERMINAL 2	Copper Alloy	Nickel
TERMINAL 3	Copper Alloy	Nickel
TERMINAL 4	Copper Alloy	Nickel
SHELL	Brass	Nickel
HOUSING	PBT	

20050 SW 112th Ave.  
Tualatin, OR 97062  
Phone: 503-612-2300  
800-275-4899  
Fax: 503-612-2383  
Website: www.cui.com

TITLE: 3.5mm Panel Mount Audio Jack - 4 Connector		REV: B
PART NO. SJ5-43502PM		UNITS: MM [INCHES]
DRAWN BY: RDS	APPROVED BY:	SCALE: 3:1

PC FILE NAME:  
SJ5-43502PM

COPYRIGHT 2008 BY CUI INC.