



		1	
Part Number:		DRAWN	E /20 /2010
TESSO	42F 4	CJ	5/20/2019
IE320	425-1	CHECKED	5/28/2019
		C.H.	3/20/2013
Description:	anical Indicator	APPROVED	5/28/2019
Liecti O-Mecha	ariicai iriulcatoi	C.E.	3/20/2019

This document contains data proprietary to DB Unlimited. Any use or reproduction, in any form, without prior written permission of DB Unlimited is prohibited. All terms and conditions can be found at www.dbunlimitedco.com


## Top View

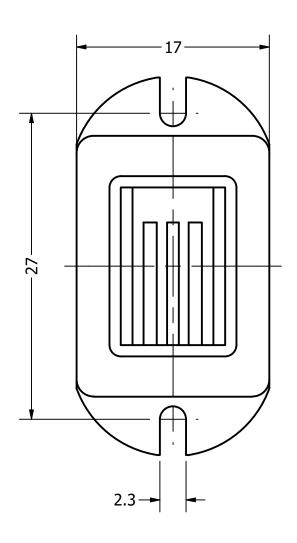

## Side View

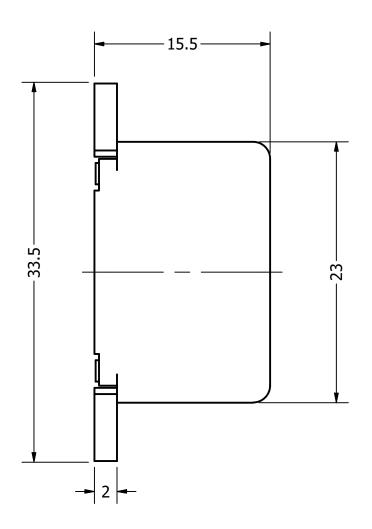

## **Bottom View**

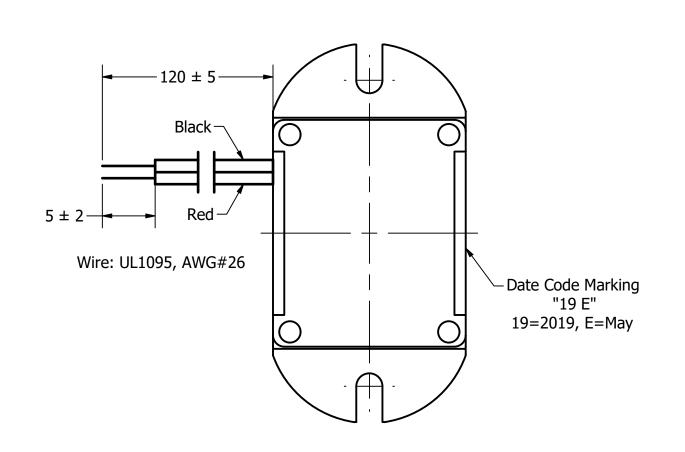

Items	Specifications	Conditions						
Min. Sound Pressure Level	81	dB (@ 10cm)						
Tone	Single							
Resonant Frequency	400	Hz						
Rated Voltage	24	V	REVISION HISTORY					
Voltage Range	15 ~ 27	V	REV	DESCRIPTION	DATE	APPROVED		
Max. Rated Current	30	mA		Released from Engineering	10/21/2013	J.S.		
Storage Temperature	-20 ~ +70	°C	1	Updated drawing template, length, SPL, temps, weight	5/28/2019	C.E.		
Operating Temperature	-20 ~ +70	°C	NOTES					
Connection Method	Lead Wires		1) All dimensions are in mm unless otherwise noted					
Mount Type	Flange Mount		2) All tolerances are ± 0.5 mm unless otherwise noted					
Housing Material	ABS		3) All parts meet RoHS					
Weight	8	g	4) Subject to change or redrawn without notice					