



		1		
Part Number:		DRAWN	F/20/2010	
IE3304	<i>1</i> 02 1	CJ	5/20/2019	
10300	403-1	CHECKED	5/21/2019	
		C.H.	3/21/2013	
Description:	anical Indicator	APPROVED	5/21/2019	
Liectro-Mech	arrical fridicator	C.E.	3/21/2019	

This document contains data proprietary to DB Unlimited. Any use or reproduction, in any form, without prior written permission of DB Unlimited is prohibited. All terms and conditions can be found at www.dbunlimitedco.com


## Top View

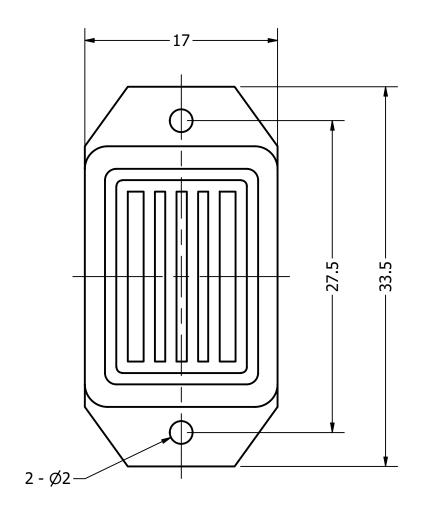

## Side View

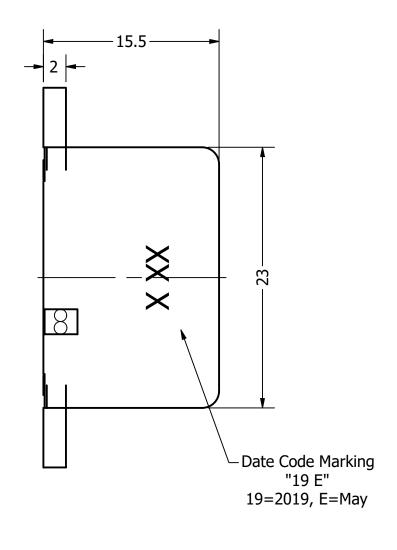

## **Bottom View**

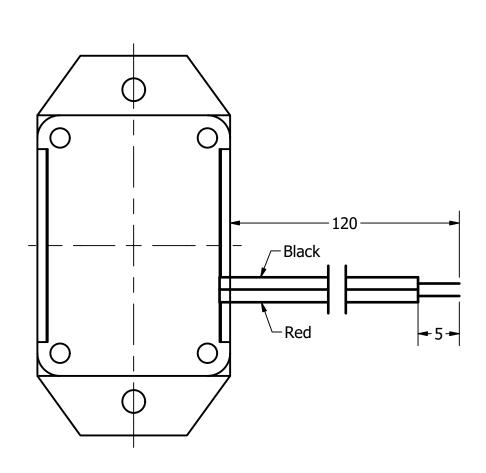

Items	Specifications	Conditions						
Min. Sound Pressure Level	70	dB (@ 10cm)						
Tone	Single							
Resonant Frequency	400	Hz						
Rated Voltage	3	V	REVISION HISTORY					
Voltage Range	2 ~ 4	V	REV	DESCRIPTION	DATE	APPROVED		
Max. Rated Current	3	mA		Released from Engineering	10/21/2013	J.S.		
Storage Temperature	-20 ~ +70	°C	1	Updated to new drawing template, weight, temps	5/21/2019	C.E.		
Operating Temperature	-20 ~ +65	°C	NOTES					
Connection Method	Lead Wires		1) All dimensions are in mm unless otherwise noted					
Mount Type	Flange Mount		2) All tolerances are ± 0.5 mm unless otherwise noted					
Housing Material	ABS		3) All parts meet RoHS					
Weight	8	g	4) Subject to change or redrawn without notice					