


		1	
Part Number:		DRAWN	4/25/2017
CNATE	0506-2	CJ	4/25/2017
SMIT20		CHECKED	4/28/2017
		P.D.	7/20/2017
Description: Dynamic	c Speaker	APPROVED	4/29/2017
		C.E.	4/28/2017

This document contains data proprietary to DB Unlimited. Any use or reproduction, in any form, without prior written permission of DB Unlimited is prohibited. All terms and conditions can be found at www.dbunlimitedco.com


Top View

11.0 ± 0.2 9.6 ± 0.2 7:0 ∓ 0:51

Side View

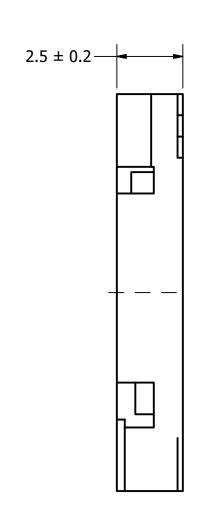

Bottom View

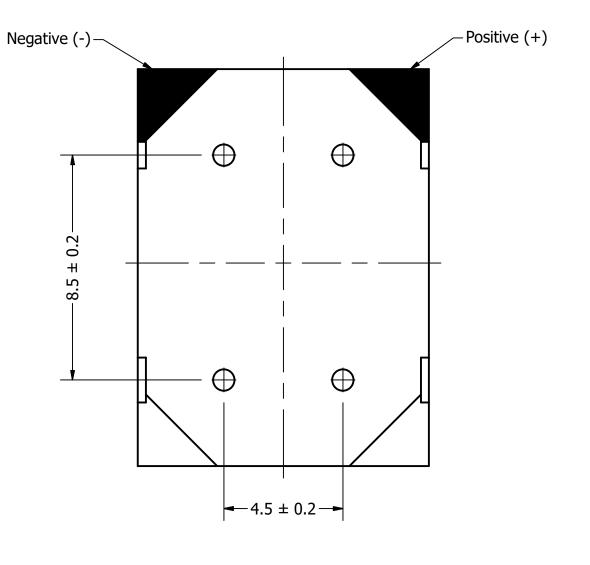

Items	Specifications	Conditions					
Sound Pressure Level	92 ± 3	dB (@ 10cm)					
Resonant Frequency	550	Hz	REVISION HISTORY				
Frequency Range	550 ~ 20,000	Hz	REV	DESCRIPTION	DATE	APPROVED	
Nominal Power	0.7	W		Released from Engineering	4/28/2015	J.S.	
Max. Power	1	W	1	Updated to new template	4/28/2017	C.E.	
Impedance	6	Ω	NOTES				
Cone Material	Mylar		1) All dimensions are in mm unless otherwise noted				
Mount Type	Flush Mount		2) All tolerances are ± 0.3 mm unless otherwise noted				

Storage Temperature $-20 \sim +70$ °C 3) All parts meet RoHS Operating Temperature $-20 \sim +70$ °C 4) Subject to change or redrawn without notice

Weight 1.6 g