



|              |             | 1        |          |
|--------------|-------------|----------|----------|
| Part Number: | art Number: |          | 2/0/2010 |
| CNATEC       | 0000 4      | CI       | 3/9/2018 |
| SMT20        | M150908-4   | CHECKED  | 2/0/2019 |
|              |             | C.H.     | 3/9/2018 |
| Description: | c Speaker   | APPROVED | 2/0/2019 |
| Dynamic      |             | C.E.     | 3/9/2018 |

This document contains data proprietary to DB Unlimited. Any use or reproduction, in any form, without prior written permission of DB Unlimited is prohibited. All terms and conditions can be found at www.dbunlimitedco.com


## Top View

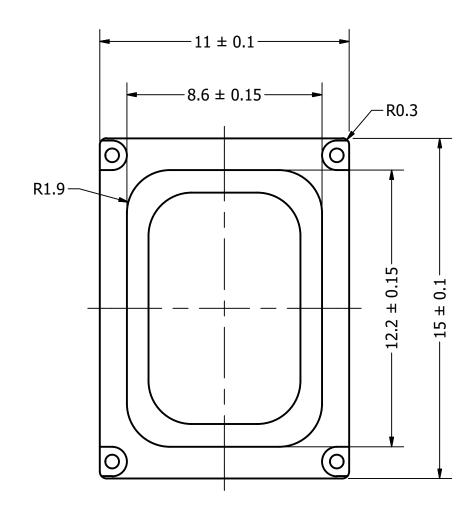

## Side View

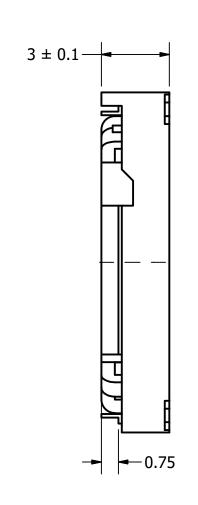

## **Bottom View**

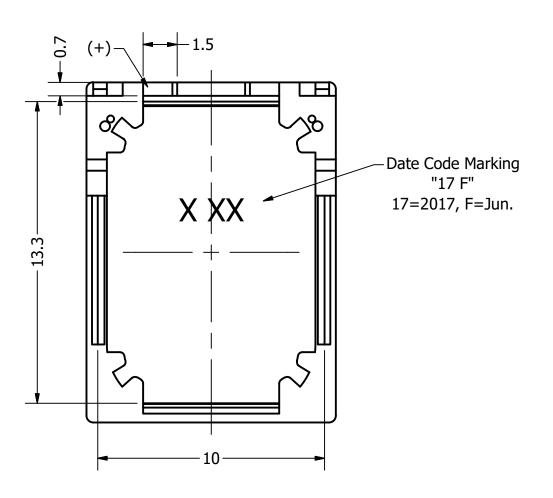

|   | Items                 | Specifications | Conditions  |          |   |          |          |  |  |
|---|-----------------------|----------------|-------------|----------|---|----------|----------|--|--|
|   | Sound Pressure Level  | 95.5           | dB (@ 10cm) |          |   |          |          |  |  |
|   | Resonant Frequency    | 900            | Hz          |          |   |          |          |  |  |
|   | Frequency Range       | 900 ~ 10,000   | Hz          |          | REVISION HISTORY                                      |          |          |  |  |
|   | Nominal Power         | 1              | W           | REV      | DESCRIPTION   | DATE     | APPROVED |  |  |
|   | Max. Power            | 1.3            | W           |          | Released from Engineering                             | 3/9/2018 | C.E.     |  |  |
| A | Impedance             | 8              | Ω           |          | NOTES   | TES      |          |  |  |
|   | Cone Material         | Polymer        |             |          | 1) All dimensions are in mm unless otherwise noted    |          |          |  |  |
|   | Mount Type            | Flush Mount    |             |          | 2) All tolerances are ± 0.2 mm unless otherwise noted |          |          |  |  |
|   | Storage Temperature   | -40 ~ +85      | °C          |          | 3) All parts meet RoHS                                |          |          |  |  |
|   | Operating Temperature | -30 ~ +70      | °C          |          | 4) Subject to change or redrawn without notice        |          |          |  |  |
|   | Weight                | 1.6            | g           |          |   |          |          |  |  |
|   | 1                     |                | 2           | <u> </u> | າ   |          | 1        |  |  |