


		1		
Part Number:		DRAWN	2/12/2017	
CM20	0400 1	CJ	3/13/2017	
20020	0408-1	CHECKED	10/5/2017	
		P.D.	10/5/2017	
Description:	manaia Chaaltau	APPROVED	10/5/2017	
waterproof Dy	namic Speaker	C.E.	10/3/2017	


This document contains data proprietary to DB Unlimited. Any use or reproduction, in any form, without prior written permission of DB Unlimited is prohibited. All terms and conditions can be found at www.dbunlimitedco.com

Top View

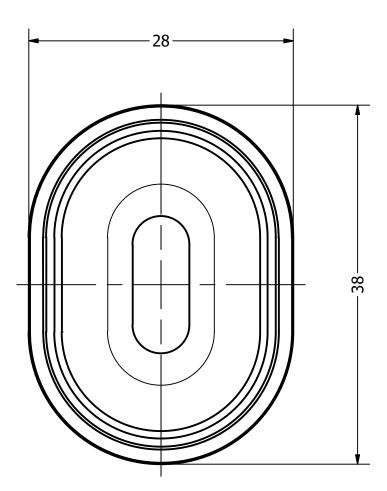


7.9

Side View

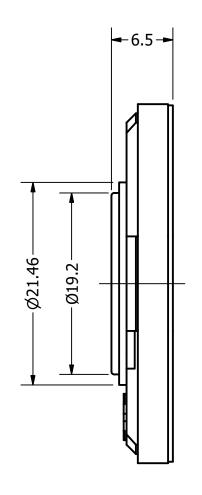

Bottom View

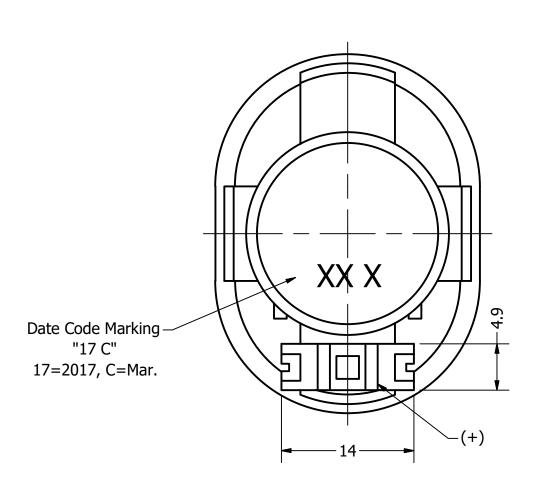

Itoms	Specifications	Conditions					
Items	<u>'</u>	Conditions					
Sound Pressure Level	90	dB (@ 10cm), Avg.					
Resonant Frequency	400	Hz	REVISION HISTORY				
Frequency Range	400 ~ 10,000	Hz	REV	DESCRIPTION	DATE	APPROVED	
Nominal Power	2	W		Released from Engineering	10/5/2017	C.E.	
Max. Power	2.5	W	1	Added polarity marking	10/25/2017	C.E.	
Impedance	8	Ω	2	Update markings	2/28/2018	C.E.	
Cone Material	Mylar	NOTES					
Mount Type	Flush Mount	1) All dimensions are in mm unless otherwise noted					
IP Rating	IP67	2) All tolerances are ± 0.3 mm unless otherwise noted					
Storage Temperature	-20 ~ +55	°C	3) All parts meet RoHS				
Operating Temperature	-20 ~ +55	°C	4) Subject to change or redrawn without notice				

4 2

g