

ENERGIZER NO. E96

AAAA



Specifications


Classification: "Cylindrical Alkaline"
Chemical System: Zinc-Manganese Dioxide (Zn/MnO₂)
(no added mercury or cadmium)
Designation: ANSI-25A, IEC-LR8D425
Nominal Voltage: 1.5 volts
Typical Capacity: 625 mAh* (to 0.8 volts)
 (based on 25 mA continuous at 21 °C)

* Varies according to the applied load, temperature, and cutoff voltage.

Operating Temp: -18°C to 55°C (0°F to 130°F)
Typical Weight: 6.5 grams (0.2 oz.)
Typical Volume: 2.2 cubic centimeters (0.1 cubic inch)
Jacket: Plastic Label


Industry Standard Dimensions

mm (inches)

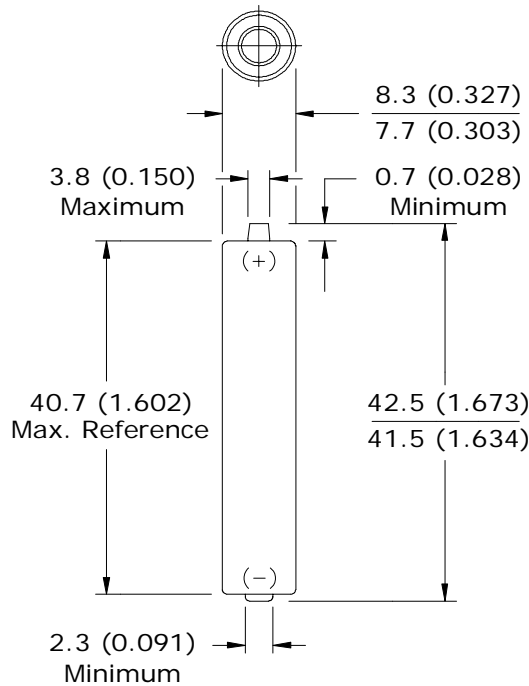


Storage/Capacity Characteristics

Effects of Storage at Various Temperatures

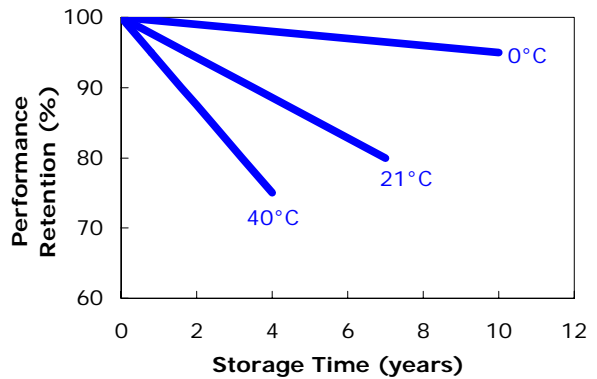


Constant Resistance Performance

Typical Discharge Characteristics (21°C)

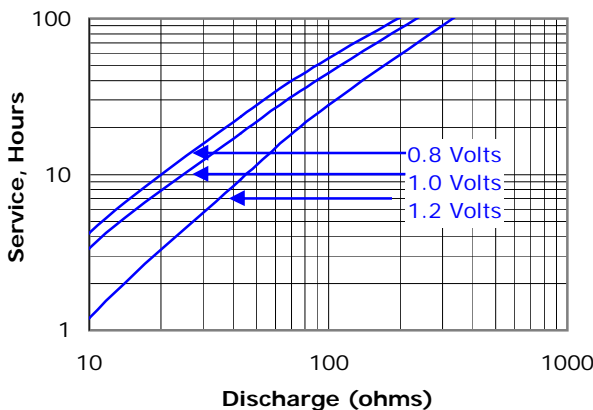

Constant Current Performance

Typical Discharge Characteristics (21°C)

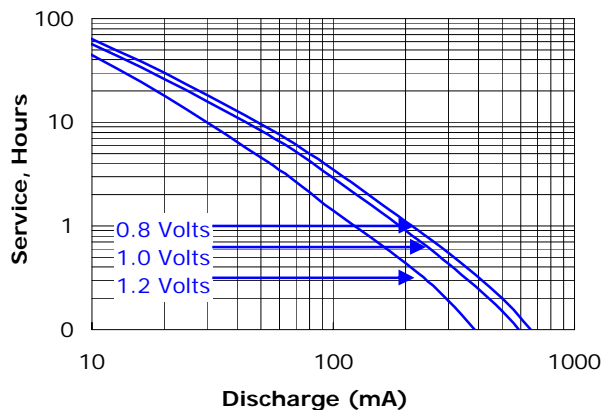

Important Notice

This data sheet contains typical information specific to batteries manufactured at the time of its publication.


Contents herein do not constitute a warranty.

©Eveready Battery Company, Inc. - All Rights Reserved


ENERGIZER NO. E96

Industry Standard Tests (21°C)


LIGHTING
5.1 ohm GPI

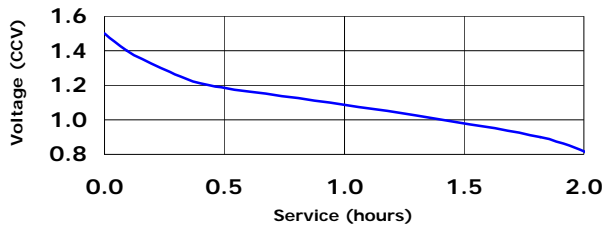

SERVICE OUTPUT
75 ohm 1 hr/day to 0.9V

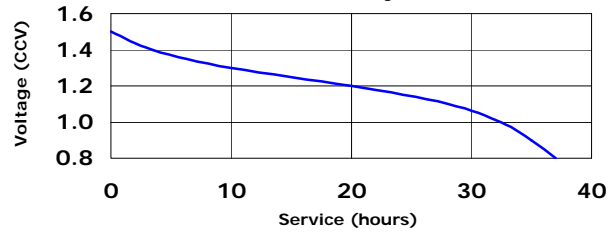

LASER POINTER
75 ohm 1 hr/day to 1.1V

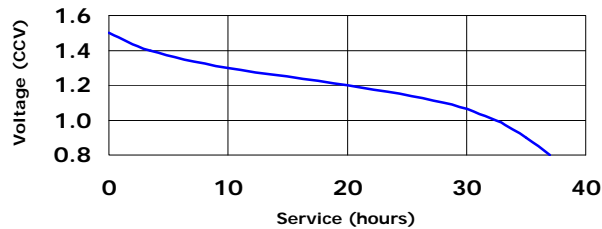

Important Notice

This data sheet contains typical information specific to batteries manufactured at the time of its publication.

Contents herein do not constitute a warranty.

©Eveready Battery Company, Inc. - All Rights Reserved