
	PROPRIETARY INFORMATION:		REVISION
- 1	PROPRIETARY OF GLOBTEK, INC. ANY REPRODUCTION, DISCLOSURE OR USE OF THIS DRAWING, IN WHOLE OR IN PART, IS HEREBY PROHIBITED EXCEPT AS SPECIFIED IN WRITING BY GLOBTEK,INC.	REV	DESCRIPTION
		A	INITIAL RELEASE, RFS. 12663, EM
- 1		В	UPDATE DRAWING, RFS. 25400, BS

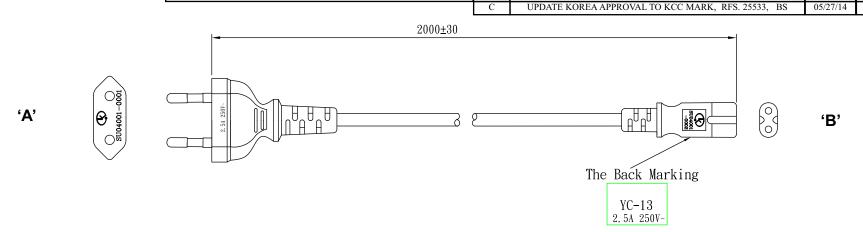

GENERAL SPECIFICATIONS:

RATING: 2.5A / 250V AC

CABLE TYPE / SIZE: H03VVH2-F, 2 x 0.75 mm²

TEMPERATURE RATING: 70° C

CONDUCTOR COLORS: **BROWN / BLUE**

CABLE JACKET COLOR: **BLACK**

OVERALL LENGTH (L): 2000 ± 30 mm

 $3.5 \times 5.7 \pm 0.15 \text{ mm}$ CABLE OUTER DIAMETER: END 'A' PLUG: KOREA KS C8305

END 'B': IEC-320 / C7

KOREA KCC MARK APPROVALS PLUG: APPROVALS CABLE: KOREA KCC MARK APPROVALS CONNECTOR: KOREA KCC MARK


NOTES:

1. CORD, PLUG AND CONNECTOR MUST BE MARKED WITH APPROVAL SYMBOLS KCC MARK:

PACKING:

HANKED

 $L = 125\pm25 \text{ mm}$



REVISION



APPROVED

BS

BS

12/28/07

01/24/14

RELEASED By N.Frost at 11:08 am, May 27, 2014

			DASH NO.	PART NO	REV.			DESCRIPTION		NOTES		
			TABULATION BLOCK									
					TOLERANCES: DECIMALS ANGULAR .xx +/- 0.1 +/- 1* .xxx +/005		ANGULAR +/- 1°	GlobTek, Inc.	186 Veterans Dr. Nort Tel. 201-784-1000 F			
	safety and performance of these power product if unauthorized access and repair occurs. End user should consult the applica-	Globtek product are not authorized for use as mission critical components in life support, hazardous environment, nuclear or aircraft applications without prior written approval from the CEO of Globtek Inc.	INIT.BY: EM	DATE: 12/28/07	MILLIMETERS ANGULAR .xx +/- 0.3 +/- 1° .xxx +/013		ANGULAR +/- 1°	DWG TITLE: KOREAN DETACHABLE CORDSE		20/C7		
Contents of this document are subject to change without prior notice			DRAWN: NF	DATE: 12/28/07	FSCN N G, CC	lo.:	SIZE A			REV. C		
			APRVD: HM	DATE: 12/28/07	SCALE: NONE		NE	PART NO: 2044112M703A(R)	SHEET 1/1		