
PROPRIETARY INFORMATION:

PROPRIETARY OF GLOBTEK, INC. ANY REPRODUCTION, DISCLOSURE OR USE OF THIS DRAWING, IN WHOLE OR IN PART, IS HEREBY PROHIBITED EXCEPT AS SPECIFIED IN WRITING BY GLOBTEK, INC.

REVISION										
REV	DESCRIPTION	DATE	APPROVED							
A	INITIAL RELEASE, RFS. 25116, DH	08/05/13	HM							
В	CHANGE TOLERANCE TO +/-30 mm & RATING TO 2.5A/250V, RFS. 25131, DH	08/12/13	HM							
С	ADD HANKED DRAWING, RFS. 26176, JS	01/19/16	HM							

'A'

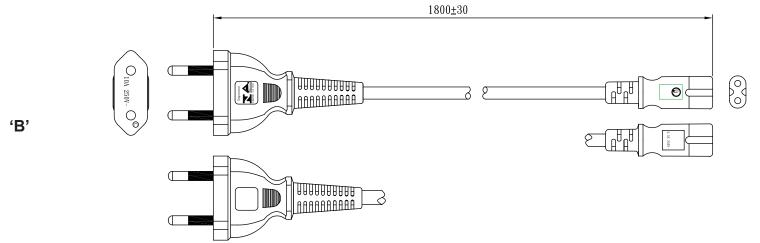

DASH



GENERAL SPECIFICATIONS:

RATING: 2.5A / 250 V AC

CABLE TYPE / SIZE: H03VVH2-F, 2 X 0.75 mm², 2C

TEMPERATURE RATING: 70° C CABLE JACKET COLOR: **BLACK** OVERALL LENGTH (L): 1800±30 mm


CABLE OUTER DIAMETER: 3.5 x 5.7 ± 0.15 mm²

IEC 320/C7 **END 'A' TERMINATION: BRAZILIAN** END 'B' TERMINATION: APPROVALS PLUG: **INMETRO**

APPROVALS CONNECTOR: UL

PACKING:

HANKED MAXIMUM SHIPPING CARTON WEIGHT IS 30 KG.



RELEASED By N.Frost at 1:51 pm, Jan 19, 2016

NOTES:

are subject to change without

prior notice

1. CORD AND PLUG MUST BE MARKED WITH APPROVAL SYMBOLS OR FILE NUMBER(S).





DASH NO.	PART	NO	REV.	DESCRIPTION				NOTES			
TABULATION BLOCK											
			TOLERA DECIMALS .xx +/- 0.1 .xxx +/005	ANGULAR +/- 1°		obTek, Inc.	186 Veterans Dr. No Tel. 201-784-1000				
INIT.BY:	DAT 08/0		MILLIMETERS .xx +/- 0.3 .xxx +/013	ANGULAR +/- 1°	DWG TITLE:	BRAZILIAN DETA	CHABLE CORDSET				
DRAWN	: NF DAT 08/0		FSCN No.: G, CC	SIZE A				REV. C			
APRVD:	HM DAT 08/0		SCALE: NONE		PART NO: 20)7B4111M8703(R)	SHEET 1/1			

Globtek Inc. will not be liable for the safety and performance of these power Contents of this document product if unauthorized access and repair

installation instruction.

ble UL,CSA or EN Standards for proper

Globtek product are not authorized for use as mission critical components in life support, hazardous environment, nuclear or occurs. End user should consult the applicaaircraft applications without prior written approval from the CEO of Globtek Inc.