


**PROPRIETARY INFORMATION:**  
 PROPRIETARY OF GLOBTEK, INC. ANY REPRODUCTION, DISCLOSURE OR USE OF THIS DRAWING, IN WHOLE OR IN PART, IS HEREBY PROHIBITED EXCEPT AS SPECIFIED IN WRITING BY GLOBTEK, INC.


| REVISION |                                 |          |          |
|----------|---------------------------------|----------|----------|
| REV      | DESCRIPTION                     | DATE     | APPROVED |
| A        | INITIAL RELEASE, RFS. 26308, EM | 04/21/16 | HM       |

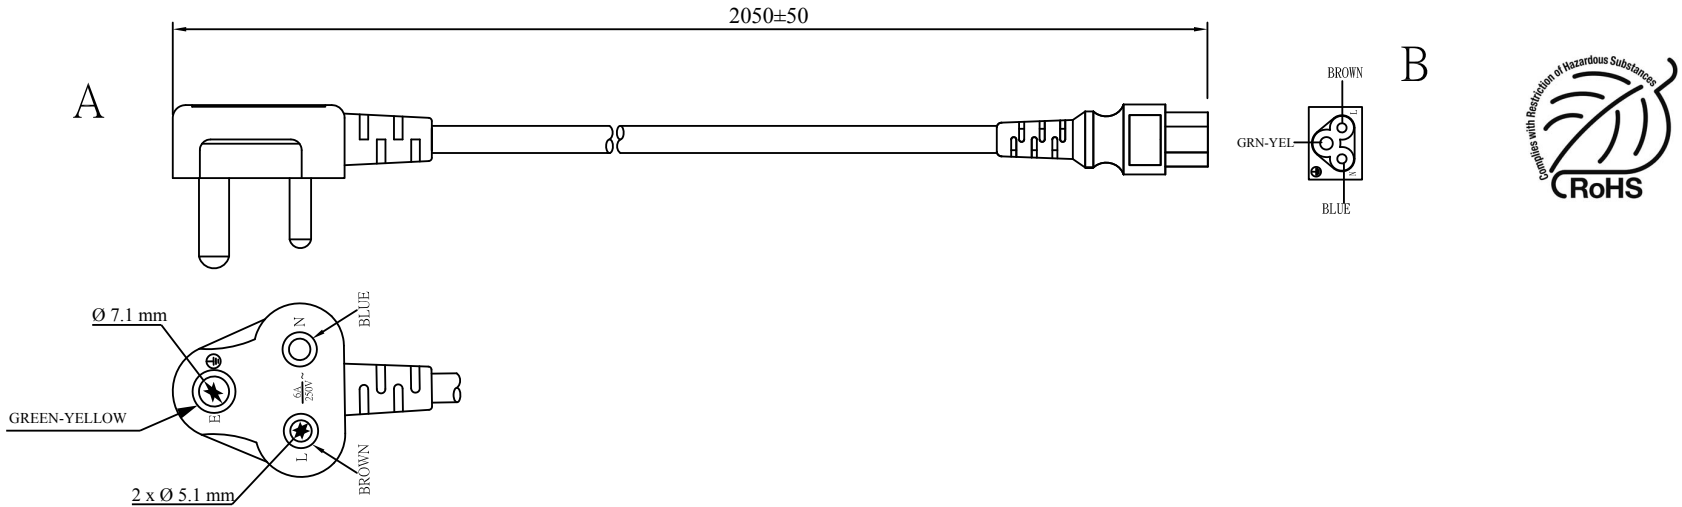

**GENERAL SPECIFICATIONS:**

RATING: 2.5A / 250V AC  
 CABLE TYPE / SIZE: H05VV-F, 3 x 0.75 mm<sup>2</sup>  
 TEMPERATURE RATING: 70°C  
 CONDUCTOR COLORS: BROWN / BLUE / GREEN-YELLOW  
 CABLE JACKET COLOR: BLACK  
 OVERALL LENGTH (L): 2050 ± 50 mm  
 CABLE OUTER DIAMETER: 6.7 ± 0.1 mm  
 END 'A' PLUG; MOLDED INDIA PLUG, 6A, IS1293:2005, BS546;  
 SOUTH AFRICA SABS 164-1  
 END 'B' IEC-320 / C5, FEMALE  
 APPROVALS PLUG: INDIA, SABS (S.AFRICA)  
 APPROVALS CABLE: VDE, N, S, D, FI, KEMA, CEBEC, OVE, SEV, SAA, CE

**PACKING:**  
 HANKED  
 L = 200 ± 20 mm

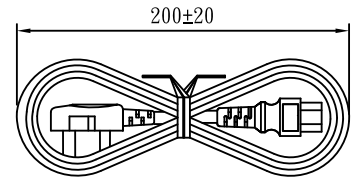

**NOTES:**  
 1. PLUG MUST BE MARKED WITH APPROVAL SYMBOLS OR FILE NUMBER(S).

**NOTES:**  
 1. CONNECTOR MUST BE MARKED WITH APPROVAL SYMBOLS OR FILE NUMBER(S).



**RELEASED**  
 By N.Frost at 4:50 pm, Apr 21, 2016

| DASH NO.                | PART NO        | REV.  | DESCRIPTION               | NOTES   |
|-------------------------|----------------|---|---------------------------|---|
| <b>TABULATION BLOCK</b> |                |   |                           |   |
|                         |                | <b>TOLERANCES:</b><br>DECIMALS ANGULAR<br>.xx +/- 0.1 +/- 1°<br>.xxx +/- .005 |                           | <b>GlobTek, Inc.</b> 186 Veterans Dr. Northvale, NJ 07647<br>Tel. 201-784-1000 Fax 201.784.0111<br><b>www.globtek.com</b> |
|                         |                | MILLIMETERS ANGULAR<br>.xx +/- 0.3 +/- 1°<br>.xxx +/- .013                    |                           |   |
| INIT.BY: EM             | DATE: 04/21/16 | DWG TITLE: INDIA/SOUTH AFRICA DETACHABLE CORDSET 2.5A/250VA C                 |                           |   |
| DRAWN: NF               | DATE: 04/21/16 | FSCN No.: G, CC   | SIZE: A                   | REV. A  |
| APRVD: HM               | DATE: 04/21/16 | SCALE: NONE   | PART NO: 208A4262M0712(R) | SHEET 1/1   |

**Foot Note:**  
 Globtek Inc. will not be liable for the safety and performance of these power product if unauthorized access and repair occurs. End user should consult the applicable UL, CSA or EN Standards for proper installation instruction.

**Limitation of Use:**  
 Globtek product are not authorized for use as mission critical components in life support, hazardous environment, nuclear or aircraft applications without prior written approval from the CEO of Globtek Inc.

Contents of this document are subject to change without prior notice