
PROPRIETARY INFORMATION:	REVISION					
PROPRIETARY OF GLOBTEK, INC. ANY REPRODUCTION, DISCLOSURE OR	REV	DESCRIPTION DATE APPRO				
USE OF THIS DRAWING, IN WHOLE OR IN PART, IS HEREBY PROHIBITED EXCEPT AS SPECIFIED IN WRITING BY GLOBTEK,INC.	Α	INITIAL RELEASE, RFS.26651, SV	02/10/17	MK		

PACKING:

BULK PACKED, BUNDLES OF 25.

MAXIMUM SHIPPING CARTON WEIGHT IS 30 KG.



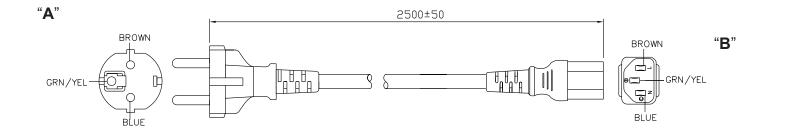

## **GENERAL SPECIFICATIONS:**

RATING:	10A / 250V AC
CABLE TYPE / SIZE:	H05RN-F, 3 x 1.0 mm <sup>2</sup>
TEMPERATURE RATING:	75° C
CONDUCTOR COLORS:	BROWN / BLUE/ GREEN-YELLOW
CABLE JACKET COLOR:	BLACK
OVERALL LENGTH (L):	2500 <u>+</u> 50 mm
CABLE OUTER DIAMETER:	7.1 <u>+</u> 0.2 mm
END 'A' PLUG;	CEE 7/7, BLACK
END 'B'	IEC 320 / C15, HOT CONDITION
APPROVALS PLUG:	VDE, N, S, D, FI, KEMA, CEBEC, OVE,
APPROVALS CABLE:	VDE, N, S, D, FI, KEMA, CEBEC, OVE
APPROVALS CONNECTOR:	VDE, N, S, D, FI, KEMA, CEBEC, OVE

## NOTES:

1. CORD, PLUG AND CONNECTOR MUST BE MARKED WITH APPROVAL SYMBOLS OR FILE NUMBER(S).

	$(\mathbb{N})$		OVE CEBEC OF	DASH NO.	PART NO	REV.		DESCRIPTION	NOTES
		TABULATION BLOCK							
				DECIMAL .xx +/- 0.1 .xxx +/00	+/- 1*	GlobTek, Inc. www.globtek.com 186 Veterans Dr. N Tel. 201-784-1000			
Contents of this document are subject to change without prior notice		Foot Note: Globtek Inc. will not be liable for the safety and performance of these power hange without ble UL,CSA or EN Standards for proper	INIT.BY: SV	DATE: 02/10/17	MILLIMETERS ANGULAR .xx +/- 0.3 +/- 1* .xxx +/013		DWG TITLE: EUROPEAN DETACHABLE CORDSET		
	Contents of this document are subject to change without		hazardous environment, nuclear or aircraft applications without prior written	DRAWN: NF	DATE: 02/10/17	FSCN No G, CC	.: SIZE A		REV. A
	installation instruction.	APRVD: DR	DATE: 02/10/17	SCALE:	NONE	PART NO: 23144132M5701H(R)	SHEET 1/1		

RELEASED

By N.Frost at 1:59 pm, Feb 10, 2017