
PROPRIETARY INFORMATION: PROPRIETARY OF GLOBTEK, INC. ANY REPRODUCTION, DISCLOSURE OR USE OF THIS DRAWING, IN WHOLE OR IN PART, IS HEREBY PROHIBITED EXCEPT AS SPECIFIED IN WRITING BY GLOBTEK, INC. REV DESCRIPTION DATE APPROVED A INITIAL RELEASE, RFS. 27265 01/28/19 BS

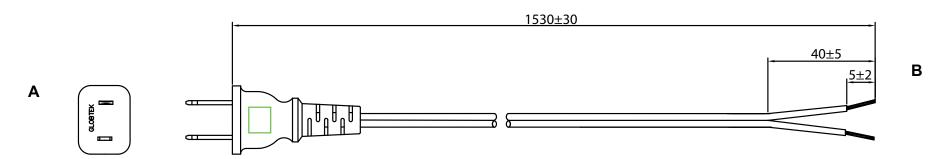

GENERAL SPECIFICATIONS:

RATING: 10A / 125V AC

CABLE TYPE / SIZE: SPT-1, 18 AWG X 2, VW-1, FT2

TEMPERATURE RATING: 60° C CABLE JACKET COLOR: WHITE

OVERALL LENGTH (L): $1530 \pm 30 \text{ mm}$ CABLE OUTER DIAMETER: $2.7 \times 5.4 \pm 0.2 \text{ mm}$


END 'A' TERMINATION: NEMA 1-15P (NON-POLARIZED)

END 'B' TERMINATION: SEE TAB

APPROVALS PLUG: UL, CSA or cUL APPROVALS CABLE: UL, CSA or cUL APPROVALS CONNECTOR: UL, CSA or cUL

PACKING:

HANKING



NOTES:

1. CORD AND PLUG MUST BE MARKED WITH APPROVAL SYMBOLS AND/ OR FILE NUMBERS.





OR



RELEASED
By N.Frost at 10:24 am, Jan 28, 2019

CONDUCTOR TERMINATION TABLE:

Wire	Color	Split ± 5 mm	Strip±2 mm	Terminal
Neutral	White	40	5	Strip
Line	White	40	5	Strip

RoHS			DASH NO.	PART NO	REV.		DESCRIPTION		
			TABULATION BLOCK						
					TOLERANCES: DECIMALS ANGULAR .xx +/- 0.1 +/- 1* .xxx +/005		GlobTek, Inc. www.globtek.com 186 Veterans Dr. Northvale, NJ 07647 Tel. 201-784-1000 Fax 201.784.0111		
Contents of this document are subject to change without prior notice	Foot Note: Globtek Inc. will not be liable for the safety and performance of these power product if unauthorized access and repair occurs. End user should consult the applica- ble UL,CSA or EN Standards for proper installation instruction.	mission critical components in life support, haz- ardous environment, nuclear or aircraft applications without prior written approval from the CEO of Globtek Inc.	INIT.BY: BS	DATE: 01/28/19	MILLIMETERS ANGULAR .xx +/- 0.3 +/- 1° .xxx +/013		DWG TITLE: NORTH AMERICAN CORDSET		
			DRAWN: NF	DATE: 01/28/19	FSCN N G, CC	Io.: SIZE		REV. A	
			APRVD: MK	DATE: 01/28/19	SCALI	E: NONE	PART NO: 4511105F0000	SHEET 1/1	