
PROPRIETARY INFORMATION:

PROPRIETARY OF GLOBTEK, INC. ANY REPRODUCTION, DISCLOSURE OR USE OF THIS DRAWING, IN WHOLE OR IN PART, IS HEREBY PROHIBITED EXCEPT AS SPECIFIED IN WRITING BY GLOBTEK,INC.

REVISION											
REV	DESCRIPTION	DATE	APPROVED								
A	INITIAL RELEASE, RFS. 16508, EM	06/25/09	BS								
В	UPDATE SAFETY MARKS, RFS. 26524, BS	10/31/16	BS								

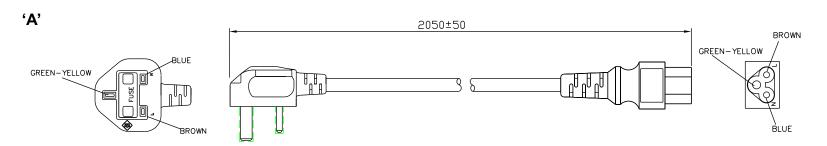

GENERAL SPECIFICATIONS:

RATING: 2.5A / 250V AC

CABLE TYPE / SIZE: HO5VV-F, 0.75 mm², 3 CONDUCTOR

TEMPERATURE RATING: 70° C CABLE JACKET COLOR: BLACK

CONDICTORS COLOR: BLUE/ BRN/GRN-YEL

OVERALL LENGTH (L): $2050 \pm 50 \text{ mm}$ CABLE OUTER DIAMETER: $6.7 \pm 0.2 \text{ MM}$

END 'A': BS1363 (FUSE 3A)

END 'B': IEC 320 / C5

APPROVALS PLUG: ASTA, HK, SINGAPORE

APPROVALS CABLE: BSI

APPROVALS CONNECTOR: ENEC - VDE

NOTES:

1. PLUG MUST BE MARKED WITH APPROVAL SYMBOLS AND / OR FILE NUMBERS.










HANKING

L = 200 + 10 MM





'B'

RELEASED
By N.Frost at 11:06 am, Nov 01, 2016

2. CONNECTOR MUST BE MARKED WITH APPROVAL SYMBOLS AND / OR FILE NUMBERS.



Contents of this document are subject to change without prior notice

Foot Note:
Globtek Inc. will not be liable for the safety and performance of these power product if unauthorized access and repair occurs. End user should consult the applicable UL_CSA or EN Standards for proper installation instruction.

Limitation of Use:
Globtek product are
not authorized for use as mission critical components in life support, hazardous environment,
nuclear or
aircraft applications without prior written
approval from the CEO of Globtek Inc.

DASH NO.	I	PART NO	REV.			DESCRIPTION			NOTES
	TABULATION BLOCK								
I		DECIN .xx +/	TOLERANCES: DECIMALS ANGULAR .xx +/- 0.1 +/- 1* .xxx +/005		GlobTek, Inc. www.globtek.com 186 Veterans Dr. No Tel. 201-784-1000				
INIT.BY:	EM	DATE: 06/25/09	MILLIMI .xx +/- .xxx +/-	- 0.3	ANGULAR +/- 1°	DWG TITLE	: BRITISH DETACHA	BLE CORDSET	
DRAWN:	NF	DATE: 06/25/09	FSCN I G, CC	No.:	SIZE A				REV. B
APRVD:	НМ	DATE: 06/25/09	SCAL	SCALE: NONE		PART NO:	6104262M0712(R)	SHEET 1/1