
PROPRIETARY INFORMATION:		REVISION				
PROPRIETARY OF GLOBTEK, INC. ANY REPRODUCTION, DISCLOSURE OR USE OF THIS DRAWING IN WHOLE OR IN PART. IS HEREBY	REV	DESCRIPTION	DATE	APPROVED		
 ROHIBITED EXCEPT AS SPECIFIED IN WRITING BY GLOBTEK.INC.	A	INITIAL RELEASE, RFS. 23953, EM	12/21/12	HM		

PACKING:

BULK PACK, NO BUNDLES, NO HANK, NO TIE

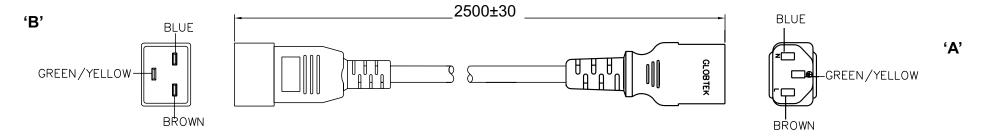

GENERAL SPECIFICATIONS:

RATING: 10A / 250V AC

SJT AWG,18x3C / H05VVF 3x1.0 mm² (DUAL MARKING) CABLE TYPE / SIZE:

TEMPERATURE RATING: 70° C MIN.

BROWN / BLUE / GREEN-YELLOW CONDUCTOR COLORS:

CABLE JACKET COLOR: **COOL GRAY. PANTONE 11C**

OVERALL LENGTH (L): 2500 + 30 mm CABLE OUTER DIAMETER: 7.6 + 0.2 mm

IEC 320 / C13 (FEMALE) END 'A' PLUG: IEC 320 / C20 (MALE) END 'B':

UL, CSA or cUL; VDE or EN/EC MINIMUM APPROVALS PLUG: UL, CSA or cUL; VDE or EN/EC MINIMUM APPROVALS CABLE: APPROVALS CONNECTOR: UL, CSA or cUL; VDE or EN/EC MINIMUM STANDARD: COMPLIES WITH UL62. EDITION 17

NOTES:

1. CORD, PLUG AND CONNECTOR MUST BE MARKED WITH APPROVAL SYMBOLS OR FILE NUMBER(S).









	Foot Note:		
	Globtek Inc. will not be liable for the		
	safety and performance of these power		
Contents of this document	product if unauthorized access and repair		
are subject to change without	occurs. End user should consult the applic ble UL,CSA or EN Standards for proper		
prior notice			
	installation instruction.		

Globtek product are not authorized for use as mission critical components in life support, hazardous environment, nuclear or aircraft applications without prior written approval from the CEO of Globtek Inc.

DASH

NO.]	PART NO	REV.		NOTES						
TABULATION BLOCK											
			TOLEF DECIMAL .xx +/- 0.1 .xxx +/00	-0.1 +/-1' Tol 201 794 1000							
INIT.BY:	EM	DATE: 12/21/12	MILLIMETEI .xx +/- 0.3 .xxx +/013	+/- 1°	DWG TITLE: INTERNATIONAL DETACHABLE CORDSET, 3 FEET, JUMPER C20 TO C13						
DRAWN:	: NF	DATE: 12/21/12	FSCN No. G, CC	SIZE A				REV. A			
APRVD:	НМ	DATE: 12/21/12	SCALE:	NONE	PART NO:	70335002M5701-GY(R)	SHEET 1/1			