
PROPRIETARY INFORMATION:	REVISION						
PROPRIETARY OF GLOBTEK, INC. ANY REPRODUCTION, DISCLOSURE OR	REV	DESCRIPTION	DATE APPR				
USE OF THIS DRAWING, IN WHOLE OR IN PART, IS HEREBY PROHIBITED EXCEPT AS SPECIFIED IN WRITING BY GLOBTEK.INC.	Α	INITIAL RELEASE, RFS. 22377, EM	08/21/12	BS			



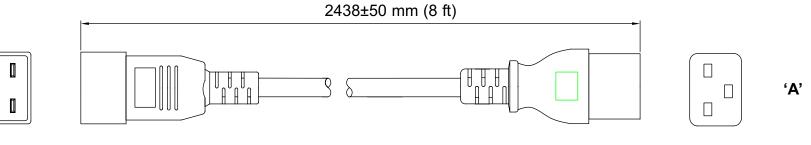

## **GENERAL SPECIFICATIONS:**

## RATING: DUAL MARKED CABI F

RATING: DUAL MARKED CABLE:	15A / 250V AC, 15A / 125V AC H05VV-F 3x1.5 mm², 70°C,  16A/250V SJT 14X3, 105°C, 15A/300V
CORDSET COLOR:	GREY RAL 7035
OVERALL LENGTH:	2438±50 mm (8 ft)
CABLE OUTER DIAMETER:	9.4 <u>+</u> 0.2 mm
END 'A' PLUG;	IEC 320 / C19 (female)
END 'B'	IEC 320 / C20 (male)
APPROVALS PLUG:	UL, CSA or cUL, CE and VDE MINIMUM
APPROVALS CABLE:	UL, CSA or cUL, CE and VDE MINIMUM
APPROVALS CONNECTOR:	UL, CSA or cUL,CE and VDE MINIMUM

## NOTES:

1. CORD, PLUG AND CONNECTOR MUST BE MARKED WITH APPROVAL SYMBOLS OR FILE NUMBER(S). 2. CERTIFICATIONS: CE, ROHS

## (VL

		AND		DASH NO.	PART NO	REV.			DESCRIPTION	NOTES
2.CABLE IS DUAL APPROVED FOR NORTH AMERICA AND EUROPE.		TABULATION BLOCK								
				DECIM .xx +/- .xxx +/-	0.1 .005	NGULAR +/- 1°	GlobTek, Inc. www.globtek.com			
	Glob	Foot Note: Globtek Inc. will not be liable for the safety and performance of these power Limitation of Use: Globtek product are not authorized for use as mission critical components in life support,			DATE: 08/21/12	.xx +/-	MILLIMETERS ANGULAR .xx +/- 0.3 +/- 1* .xxx +/013		DWG TITLE: INTERNATIONAL DETACHABLE JUMPER CORDSET C19/C20, LENGTH: 8 ft, COLOR: GREY RAL 7035	
Contents of this document are subject to change without prior notice	Contents of this document are subject to change without occu	t product if unauthorized access and repair has a cours. End user should consult the applica-	hazardous environment, nuclear or aircraft applications without prior written approval from the CEO of Globtek Inc.	DRAWN: NF	DATE: 08/21/12	FSCN N G, CC	No.:	SIZE A		REV. A
				APRVD: HM	DATE: 08/21/12	SCAL	SCALE: NONE		PART NO: 70335148F07032-GY(R)	SHEET 1/1

