



PROPRIETARY INFORMATION:
 PROPRIETARY OF GLOBTEK, INC. ANY REPRODUCTION, DISCLOSURE OR
 USE OF THIS DRAWING, IN WHOLE OR IN PART, IS HEREBY
 PROHIBITED EXCEPT AS SPECIFIED IN WRITING BY GLOBTEK, INC.

REVISION			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE, RFS.5619, DMR	02/25/05	DMR

'A'

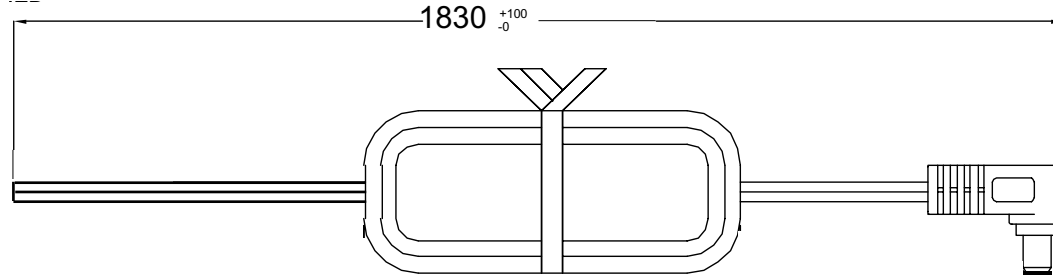

'B'



GENERAL SPECIFICATIONS:

CABLE TYPE / SIZE: # 2468, 20 AWG X 2, FLAT CABLE
 TEMPERATURE RATING: 60° C MIN.
 CABLE JACKET COLOR: BLACK
 POLARITY: IDENTIFIED CONDUCTOR (STRIPE OR RIB)
 IS TO BE CONNECTED TO OUTSIDE OF BARREL.
 OVERALL LENGTH (L): 1830 ± 20 MM (6 Ft)
 CABLE OUTER DIAMETER: 2.7 x 5.4 ± 0.2 MM
 END 'A' TERMINATION: CUT BLUNT
 END 'B' TERMINATION: RIGHT ANGLE FEMALE BARREL 5.5 x 2.5 x 12 mm

NOTES:

- CORD MUST BE MARKED WITH APPROVAL SYMBOLS OR FILE NUMBER(S).

PACKING:

BULK PACKED, BUNDLES OF 25.
 MAXIMUM SHIPPING CARTON WEIGHT IS 30 KG.



OR



DASH NO.	PART NO	REV.	DESCRIPTION	NOTES	
TABULATION BLOCK					
			TOLERANCES: DECIMALS ANGULAR .xx +/- 0.1 +/- 1° .xxx +/- .005	GlobTek, Inc. 186 Veterans Dr. Northvale, NJ 07647 www.globtek.com Tel. 201-784-1000 Fax 201.784.0111	
INIT.BY: DMR		DATE: 02/25/05	MILLIMETERS ANGULAR .xx +/- 0.3 +/- 1° .xxx +/- .013		DWG TITLE: LOW VOLTAGE DC CORDSET
DRAWN: NF		DATE: 02/25/05	FSCN No.: G, CC	SIZE: A	REV. A
APRVD: DMR		DATE: 02/25/05	SCALE: NONE		PART NO: LRA1806F00-JP
					SHEET 1/1

Foot Note:
 Globtek Inc. will not be liable for the safety and performance of these power product if unauthorized access and repair occurs. End user should consult the applicable UL, CSA or EN Standards for proper installation instruction.

Limitation of Use:
 Globtek product are not authorized for use as mission critical components in life support, hazardous environment, nuclear or aircraft applications without prior written approval from the CEO of Globtek Inc.

Contents of this document are subject to change without prior notice