


# Shorting Links


## Ø1mm Shorting Link Plugs

- Choice of insulated or uninsulated links.
- Insulated links supplied in a variety of colours.
- Uninsulated links can be soldered directly into PCB for permanent linking.


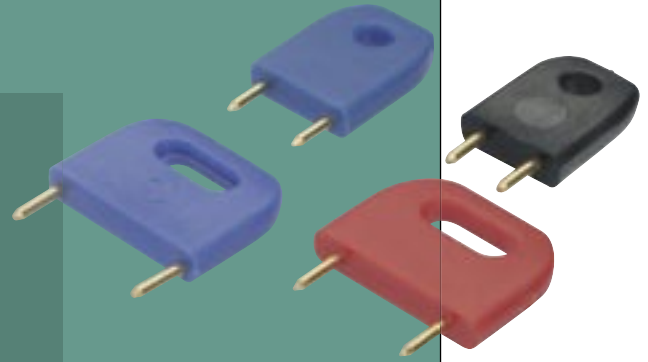


### INSULATED

#### Style 1



#### Style 2



### SPECIFICATION


#### Material

Moulding	Acetal Copolymer UL94-HB
Content	Brass
Finish	Insulated: Gold Uninsulated: See order code

#### Electrical

Current Rating	10A at 20°C
----------------	-------------

### UN-INSULATED



### HOW TO ORDER

**D308X X - XX**

#### SERIES CODE

	TYPE	STYLE	PITCH (A)
0	Un-insulated	n/a	5.08mm
1	Un-insulated	n/a	6.35mm
2	Un-insulated	n/a	10.16mm
6	Insulated	1	5.08mm
7	Insulated	1	6.35mm
8	Insulated	2	10.16mm
9	Insulated	2	12.70mm

#### FINISH

01	Tin / Lead (un-insulated)
05	Gold (un-insulated)
46	Tin (un-insulated)
97	Blue (insulated)
98	Black (insulated)
99	Red (insulated)

www.harwin.com