


Specification Sheet

Part Number: 157-00359

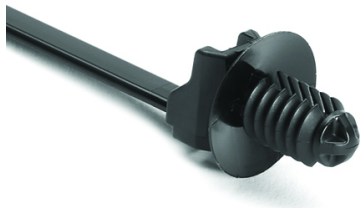

1-Pc Cable Tie/Fir Tree Mount with Disc, 6.5"L, 0.25" - 0.28" Mounting Hole, PA66HS, Black, 500/bag

Article Number 157-00359

Type T50SOSFT6.5LG-E4X

Color Black (BK)

Features & Benefits

- All-in-one bundling and fastening solution reduces costs and assembly time.
- Disc feature provides anti-rattle protection in high-vibration applications.

Quantity Per bag

Product Description	One-piece mounting ties offer a complete solution by both bundling and mounting wires, cables and tubes. The fir tree mount provides low insertion force with a high extraction force. Outside serrations on the cable tie leave a smooth interior surface that's gentler on sensitive wire insulation. The unique head design allows the cable tie to firmly hold bundles as small as .06" diameter. The disc offers added protection against debris.
Short Description	1-Pc Cable Tie/Fir Tree Mount with Disc, 6.5"L, 0.25" - 0.28" Mounting Hole, PA66HS, Black, 500/bag
Global Part Name	T50SOSFT6.5LG-E4X-PA66HS-BK
Minimum Tensile Strength (Imperial)	50.0
Minimum Tensile Strength (Metric)	225.0
Length L (Imperial)	6.5
Length L (Metric)	165.0
Fixation Method	Fir Tree
Identification Plate Position	none
Releasable Closure	No
Tie Closure	plastic pawl
Width W (Imperial)	0.18
Width W (Metric)	4.6

Bundle Diameter Min (Imperial)	0.04
Bundle Diameter Min (Metric)	1.0
Bundle Diameter Max (Imperial)	1.38
Bundle Diameter Max (Metric)	35.0
Thickness T (Imperial)	0.05
Thickness T (Metric)	1.3
Panel Thickness Min(Imperial)	0.03
Panel Thickness Max(Imperial)	0.28
Panel Thickness Min (Metric)	0.7
Panel Thickness Max (Metric)	7.0
Mounting Hole Diameter D (Imperial)	0.25 - 0.28
Mounting Hole Diameter D (Metric)	6.3 - 7.0 mm
Mounting Hole Diameter D Min (Imperial)	0.25
Mounting Hole Diameter D Max (Imperial)	0.28
Mounting Hole Diameter D Max (Metric)	7.0
Disc Diameter(Metric)	16.0
Disc Diameter (Imperial)	0.63

Material Polyamide 6.6 heat stabilized (PA66HS)

Material Shortcut PA66HS

Flammability UL 94 HB

Operating Temperature (Metric) -40°F to +257°F (-40°C to +125°C)

ROHS Complaint Yes

Package Quantity(Imperial) 500

Package Quantity (Metric) 500

Customs Number 3926909988