


Jun.1.2020 Copyright 2020 HIROSE ELECTRIC CO., LTD. All Rights Reserved.  
 In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

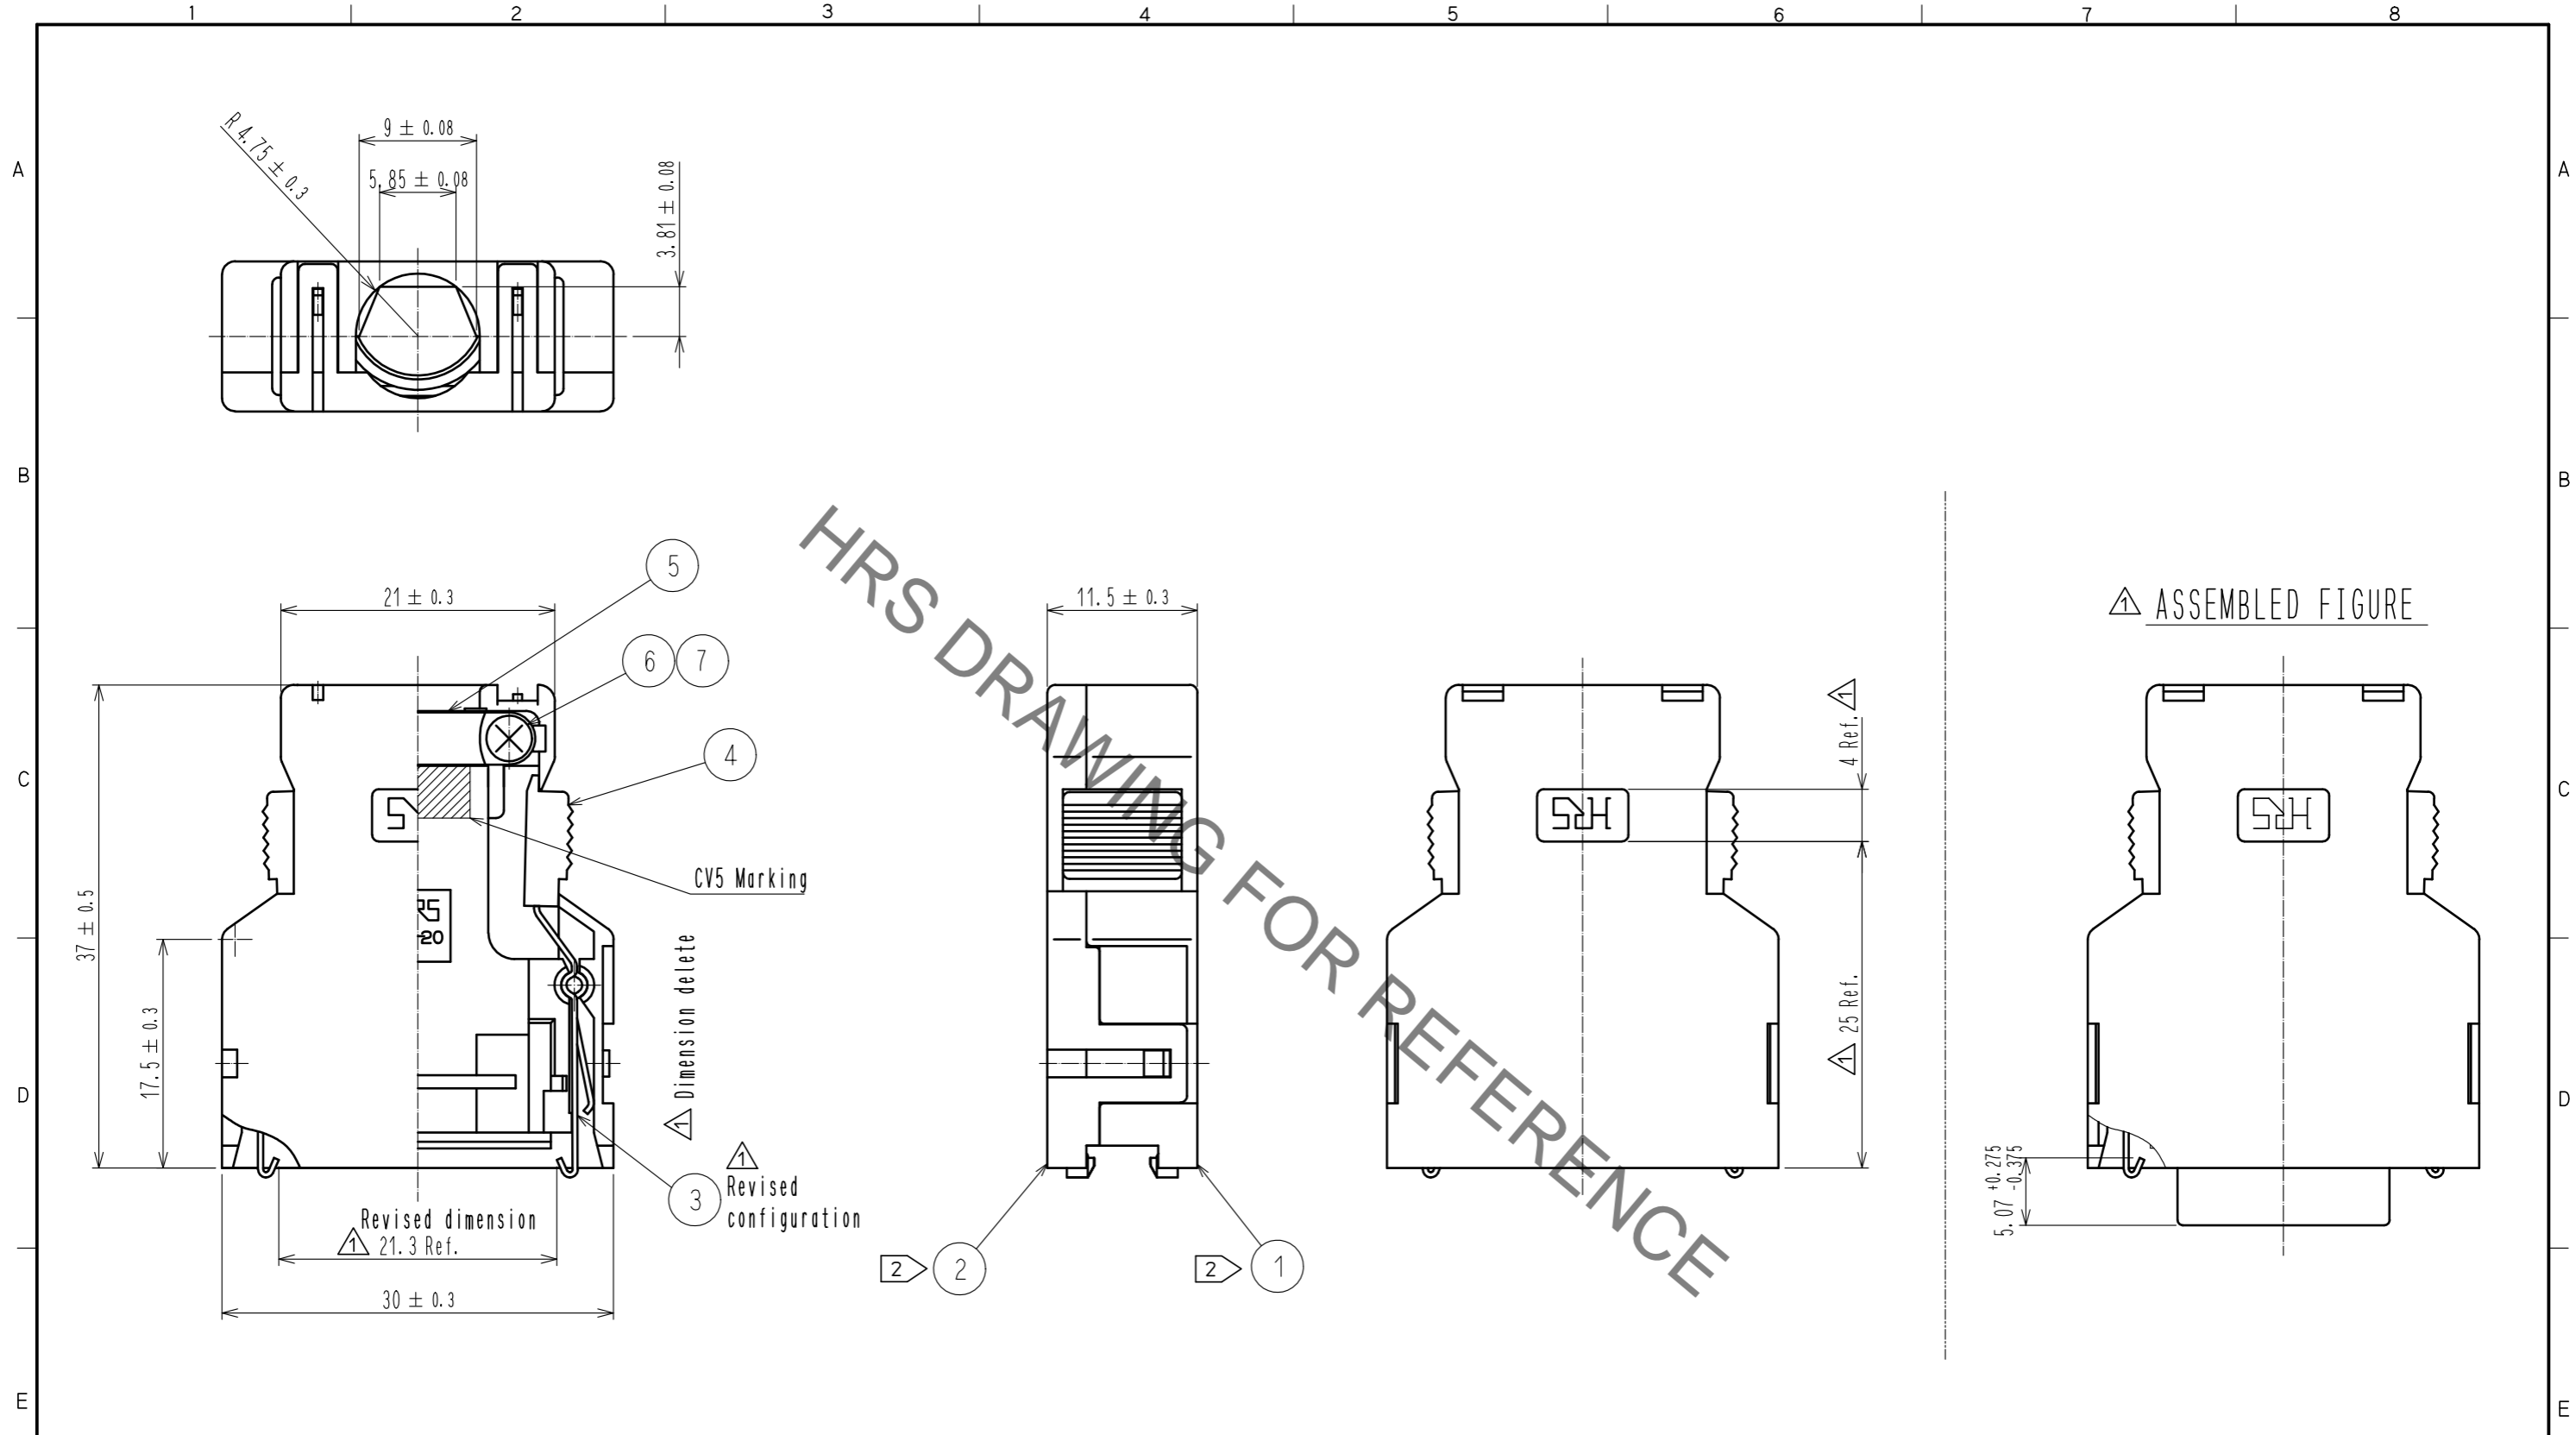

**Note**

1. Outer surface of cover case part no. ① and ② are matte finished equivalent to TH-117 (Tanazawa hakkosha Co., Ltd.). Except around the ditch of HRS mark.
2. Part no. ③, ④, ⑤, ⑥, ⑦ are assembled into part no. ①. Part no. ① and ② are not assembled when delivered.
3. Outer diameter of applicable cable shall be  $\phi 9.2 \pm 0.3$ .

NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS
4	Polycarbonate	Gray . UL94V-0			
3	Stainless steel		7	Brass	Nickel plating $0.8 \mu\text{m}$ Min.
2	Polycarbonate	Gray . UL94V-0	6	Brass	Nickel plating $0.8 \mu\text{m}$ Min.
1	Polycarbonate	Gray . UL94V-0	5	Stainless steel	

UNITS	SCALE	COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
mm	2 : 1	7	DIS-E-00001548	P. EKSOURIYA	AH. KODAMA	18. 07. 09

APPROVED	: HO. MIWA	05. 10. 17	DRAWING NO.	EDC-120074-50-01	
CHECKED	: YH. ENAMI	05. 10. 14	PART NO.	FI-20-CV5(50)	
DESIGNED	: TU. TANIGUCHI	05. 10. 14	CODE NO.	CL230-0515-9-50	
DRAWN	: YK. SATO	05. 09. 07			