


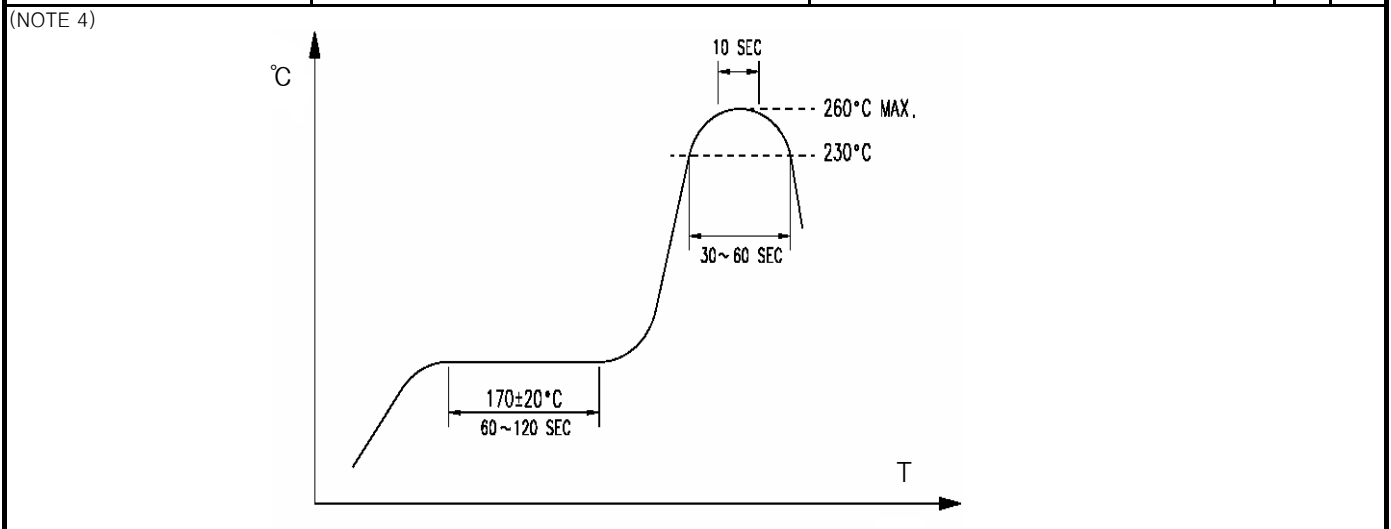
Jun.1.2020 Copyright 2020 HIROSE ELECTRIC CO., LTD. All Rights Reserved.  
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE		COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE
△	3	RE-5-1567	N.J.W	S.H.C	17.02.06	△					
△						△					
<b>APPLICABLE STANDARD</b>											
RATING	OPERATING TEMPERATURE RANGE		-30℃ ~ +85℃(NOTE1)			STORAGE TEMPERATURE RANGE		-40℃ ~ +85℃			
	VOLTAGE		AC 10V MAX			OPERATING OR STORAGE HUMIDITY RANGE		95% MAXIMUM (NON-CONDENSING)			
	CURRENT		0.5A								
<b>SPECIFICATIONS</b>											
ITEM		TEST METHOD				REQUIREMENTS				QT	AT
<b>CONSTRUCTION</b>											
GENERAL EXAMINATION		VISUALLY AND BY MEASURING INSTRUMENT				ACCORDING TO DRAWING				X	X
MARKING		CONFIRMED VISUALLY								X	X
<b>ELECTRICAL CHARACTERISTICS</b>											
CONTACT RESISTANCE MILLIVOLT LEVEL METHOD IEC60512-2-1		OPEN VOLTAGE 20 mV AC MAX TEST CURRENT 1mA				INITIALLY 100mΩ MAXIMUM (NOTE 2)				X	-
VOLTAGE PROOF IEC60512-3-1		500Vrms AC IS APPLIED FOR 1 MINUTE				① NO FLASHOVER OR BREAKDOWN ② CURRENT LEAKAGE 1mA MAXIMUM				X	X
INSULATION RESISTANCE IEC60512-3		MEASURE WITHIN 1 MINUTE AFTER APPLYING 500V DC				INITIALLY 1000MΩ MINIMUM				X	-
<b>MECHANICAL CHARACTERISTICS</b>											
CARD INSERTION FORCE		MEASURED BY APPLICABLE CARD AT 25±3mm/min				3 TO 7N (NOTE 3)				X	-
CARD EJECTION FORCE											
MECHANICAL OPERATION [OFFICE ENVIRONMENT] EIA364B class 1.1		5,000 TIMES INSERTION AND WITHDRAWAL SHALL BE MADE AT THE CYCLE RATE LESS THAN 10 CYCLES PER 1MINUTE  NOTE : AFTER EACH 10 CYCLES STOP THE INSERTION AND REST THE CONNECTOR FOR 5 TO 10 MINUTES.  CARD SURFACE SHALL BE CLEANED BY AIR BLOW: AT EACH 100 CYCLES INTERVAL(10 TIMES) FROM START TO 1,000 CYCLES.  AT EACH 1,000 CYCLES INTERVAL(4 TIMES) FROM 1,001 CYCLES TO 5,000CYCLES.△				① CONTACT RESISTANCE: AFTER TEST 50mΩ MAXIMUM CHANGE  ② NO MECHANICAL DAMAGE SHALL OCCUR ON THE PARTS.				X	-
VIBRATION AND HIGH FREQUENCY IEC60512-4-6d		FREQUENCY 10 TO 55 TO 10 Hz/min, SINGLE AMPLITUDE 0.75mm FOR 4h IN 3 DIRECTIONS, TOTAL 12h				① NO ELECTRICAL DISCONTINUITY OF 100us ② NO MECHANICAL DAMAGE SHALL OCCUR ON THE PARTS.				X	-
SHOCK IEC60512-4-6c		ACCELERATION 490m/s <sup>2</sup> STANDARD HOLDING TIME 11ms, SEMI-SINE WAVE FOR 3 TIMES IN 3 DIRECTIONS, TOTAL 18 TIMES.				③ CONTACT RESISTANCE AFTER TEST 50mΩ MAXIMUM CHANGE				X	-
<b>REFERENCE DRAWING</b>											
REMARKS CONDITIONS FOR TESTING					DRAWN	DESIGNED	CHECKED	APPROVED	RELEASED		
(NOTE 1) : INCLUDE THE TEMPERATURE RISE BY CURRENT (NOTE 2) : CONTACT RESISTANCE INCLUDES CONDUCTOR RESISTANCE UNLESS OTHERWISE SPECIFIED. THE TEST SHOULD BE DONE UNDER TEMP 15 TO 35℃. AIR PRESSURE 86 TO 106kPA, RESLATIVE HUMIDITY 25 TO 85%. (NOTE 3) : IT MAY BE CHANGED ACCORDING TO THE TRAY/CARD MATERIAL AND DIMENSIONS.△					C.K.KIM 14.06.30	C.K.KIM 14.06.30	J.H.CHOI 14.06.30	H.C.SONG 14.06.30			
NOTE QT: QUALIFICATION TEST AT: ASSURANCE TEST X: APPLICABLE TEST											
HIROSE KOREA CO.,LTD.			SPECIFICATION SHEET				PART NO. KP13B-SF-PEJ(800)				
CODE NO.(OLD) CL		DRAWING NO. ELC4-631768			CODE NO. CL 6530-0002-9-800				1 2		

Jun.1.2020 Copyright 2020 HIROSE ELECTRIC CO., LTD. All Rights Reserved.  
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

## SPECIFICATIONS

ITEM	TEST METHOD	REQUIREMENTS	QT	AT
<b>ENVIRONMENTAL CHARACTERISTICS</b>				
DAMP HEAT CYCLE IEC60512-6-11m	10 CYCLES(1CYCLE=24HOURS)WITH CONNECTORS ENGAGED.  	① CONTACT RESISTANCE : AFTER TEST 50mΩ MAXIMUM CHANGE  ② INSULATION RESISTANCE : AFTER TEST 100MΩ MINIMUM  ③ NO MECHANICAL DAMAGE OR HEAVY CORROSION SHALL OCCUR ON THE PARTS.	X	-
RAPID CHANGE OF TEMPERATURE IEC60512-6-11d	5 CYCLES (1CYCLE = 1HOUR)WITH CARD MATED CONDITION TEMPERATURE : -55°C TO +85°C	③ NO MECHANICAL DAMAGE OR HEAVY CORROSION SHALL OCCUR ON THE PARTS.	X	-
DRY HEAT IEC60068-2-2Bb	EXPOSED AT 85°C FOR 96 HOURS WITH CARD MATED CONDITION		X	-
COLD IEC60068-2-Ab	EXPOSED AT -40°C FOR 96 HOURS WITH CARD MATED CONDITION		X	-
DAMP HEAT STEADY STATE IEC60512-6-11c	EXPOSED AT 40°C, 90 TO 95%RH, 96 HOURS WITH CARD MATED CONDITION		X	-
HYDROGEN SULPHIDE JEIDA 38	EXPOSED IN 3 PPM HYDROGEN SULPHIDE, APPROX. 40°C, 80%RH, 96HOURS		X	-
CORROSION SALT MIST	EXPOSED AT 35±2°C, 5% SALT WATER SPRAY FOR 48Hr		X	-
RECOMMENDED TEMPERATURE PROFILE	SEE THE FOLLOWING CONDITION, NUMBER OF CYCLE 1 TIME (NOTE 4)	BEFORE & AFTER REFLOW 0.1mm MAX <sup>△</sup> 1 NO MECHANICAL DAMAGE OR HEAVY CORROSION SHALL OCCUR ON THE PARTS.	X	-



### REFERENCE DRAWING

NOTE QT: QUALIFICATION TEST AT: ASSURANCE TEST X: APPLICABLE TEST				
HIROSE KOREA CO.,LTD.	SPECIFICATION SHEET	PART NO.	KP13B-SF-PEJ(800)	
CODE NO.(OLD) CL	DRAWING NO. ELC4-631768	CODE NO.	CL 6530-0002-9-800	2 2