May.1.2020 Copyright 2020 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE		COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE
1	1	RE-E-08442	M.K	A.S	02.02.22						. .
					. .						. .
					. .						. .

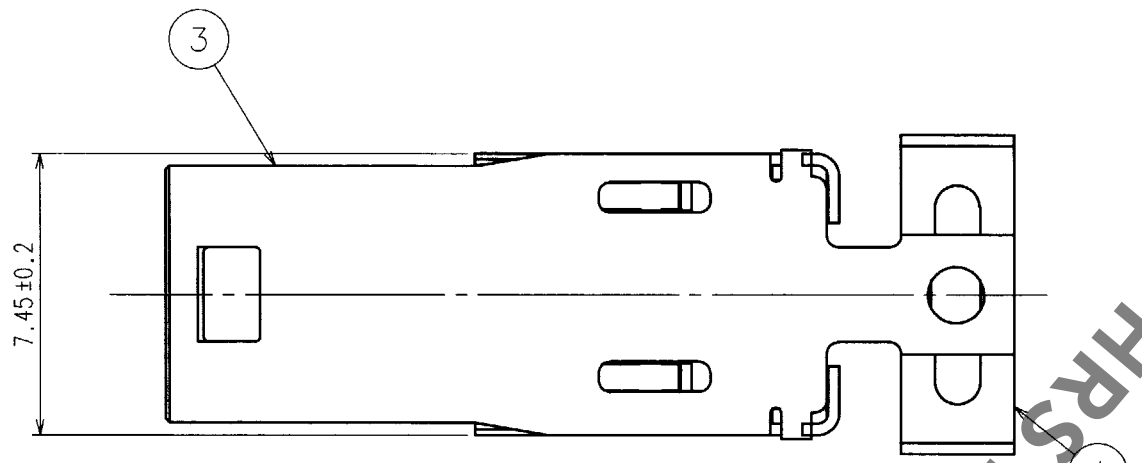

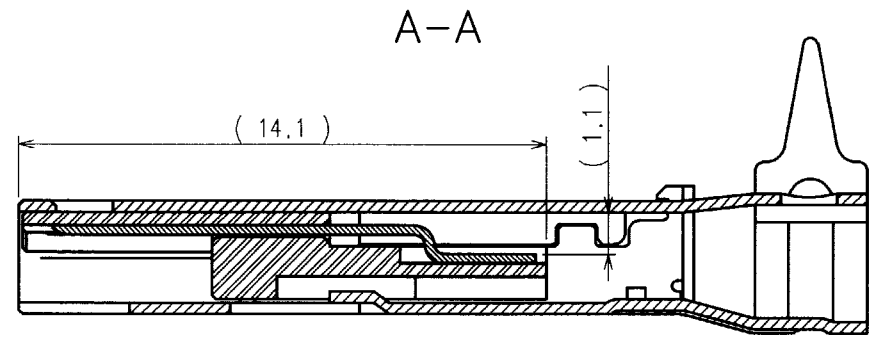

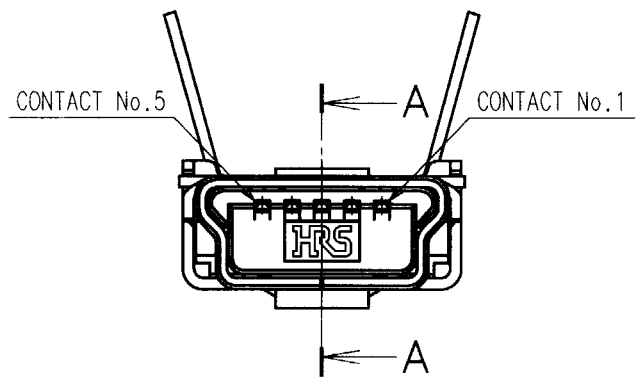

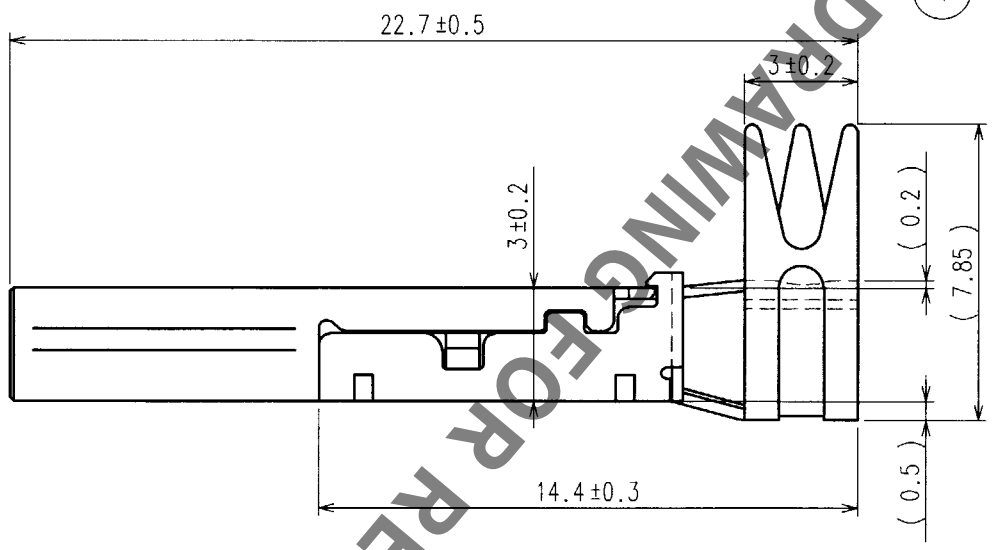

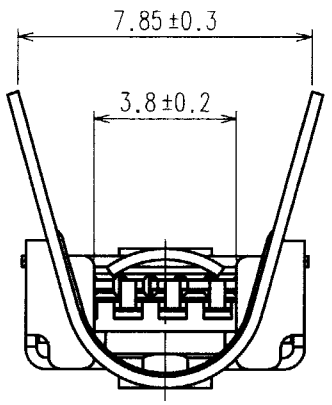

CONNECTOR UNIT

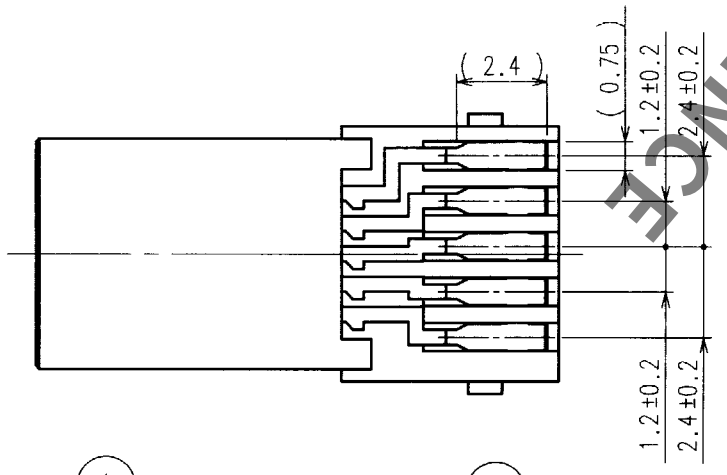

NOTES 1 INTERFACE DIMENSIONS CONFORM TO USB2.0 STANDARDS.(Mini-B)
2 COMPONENTS OF REF.NO.③AND④ARE APPENDED PRODUCTS.
⚠3 THE DIAMETER OF A CABLE SHOULD FOLLOW φ 4.1 TO φ 4.6 AS A GUIDE.
(IT CHANGES A LITTLE WITH HARDNESS OF A SHEATH ETC.)

NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS
2	COPPER ALLOY	SELECTED GOLD PLATING	4	STELL	TIN ALLOY PLANING
1	PBT	BLACK UL94V-0	3	STELL	TIN ALLOY PLATING

CODE NO.(OLD)	DRAWN	DESIGNED	CHECKED	APPROVED	RELEASED
	M.KENJO 01.12.18	M.KENJO 01.12.18	A.SUZUKI 01.12.18	S.KIKUTA 01.12.18	. .

SCALE 5 : 1 UNITS mm	DRAWING NO. EDC3-123440	PART NO. UX40A-MB-5P
HRS HIROSE ELECTRIC CO., LTD		CODE NO. CL240-0005-0 1/1

TO

HRS DRAWING FOR REFERENCE