


May.1.2020 Copyright 2020 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

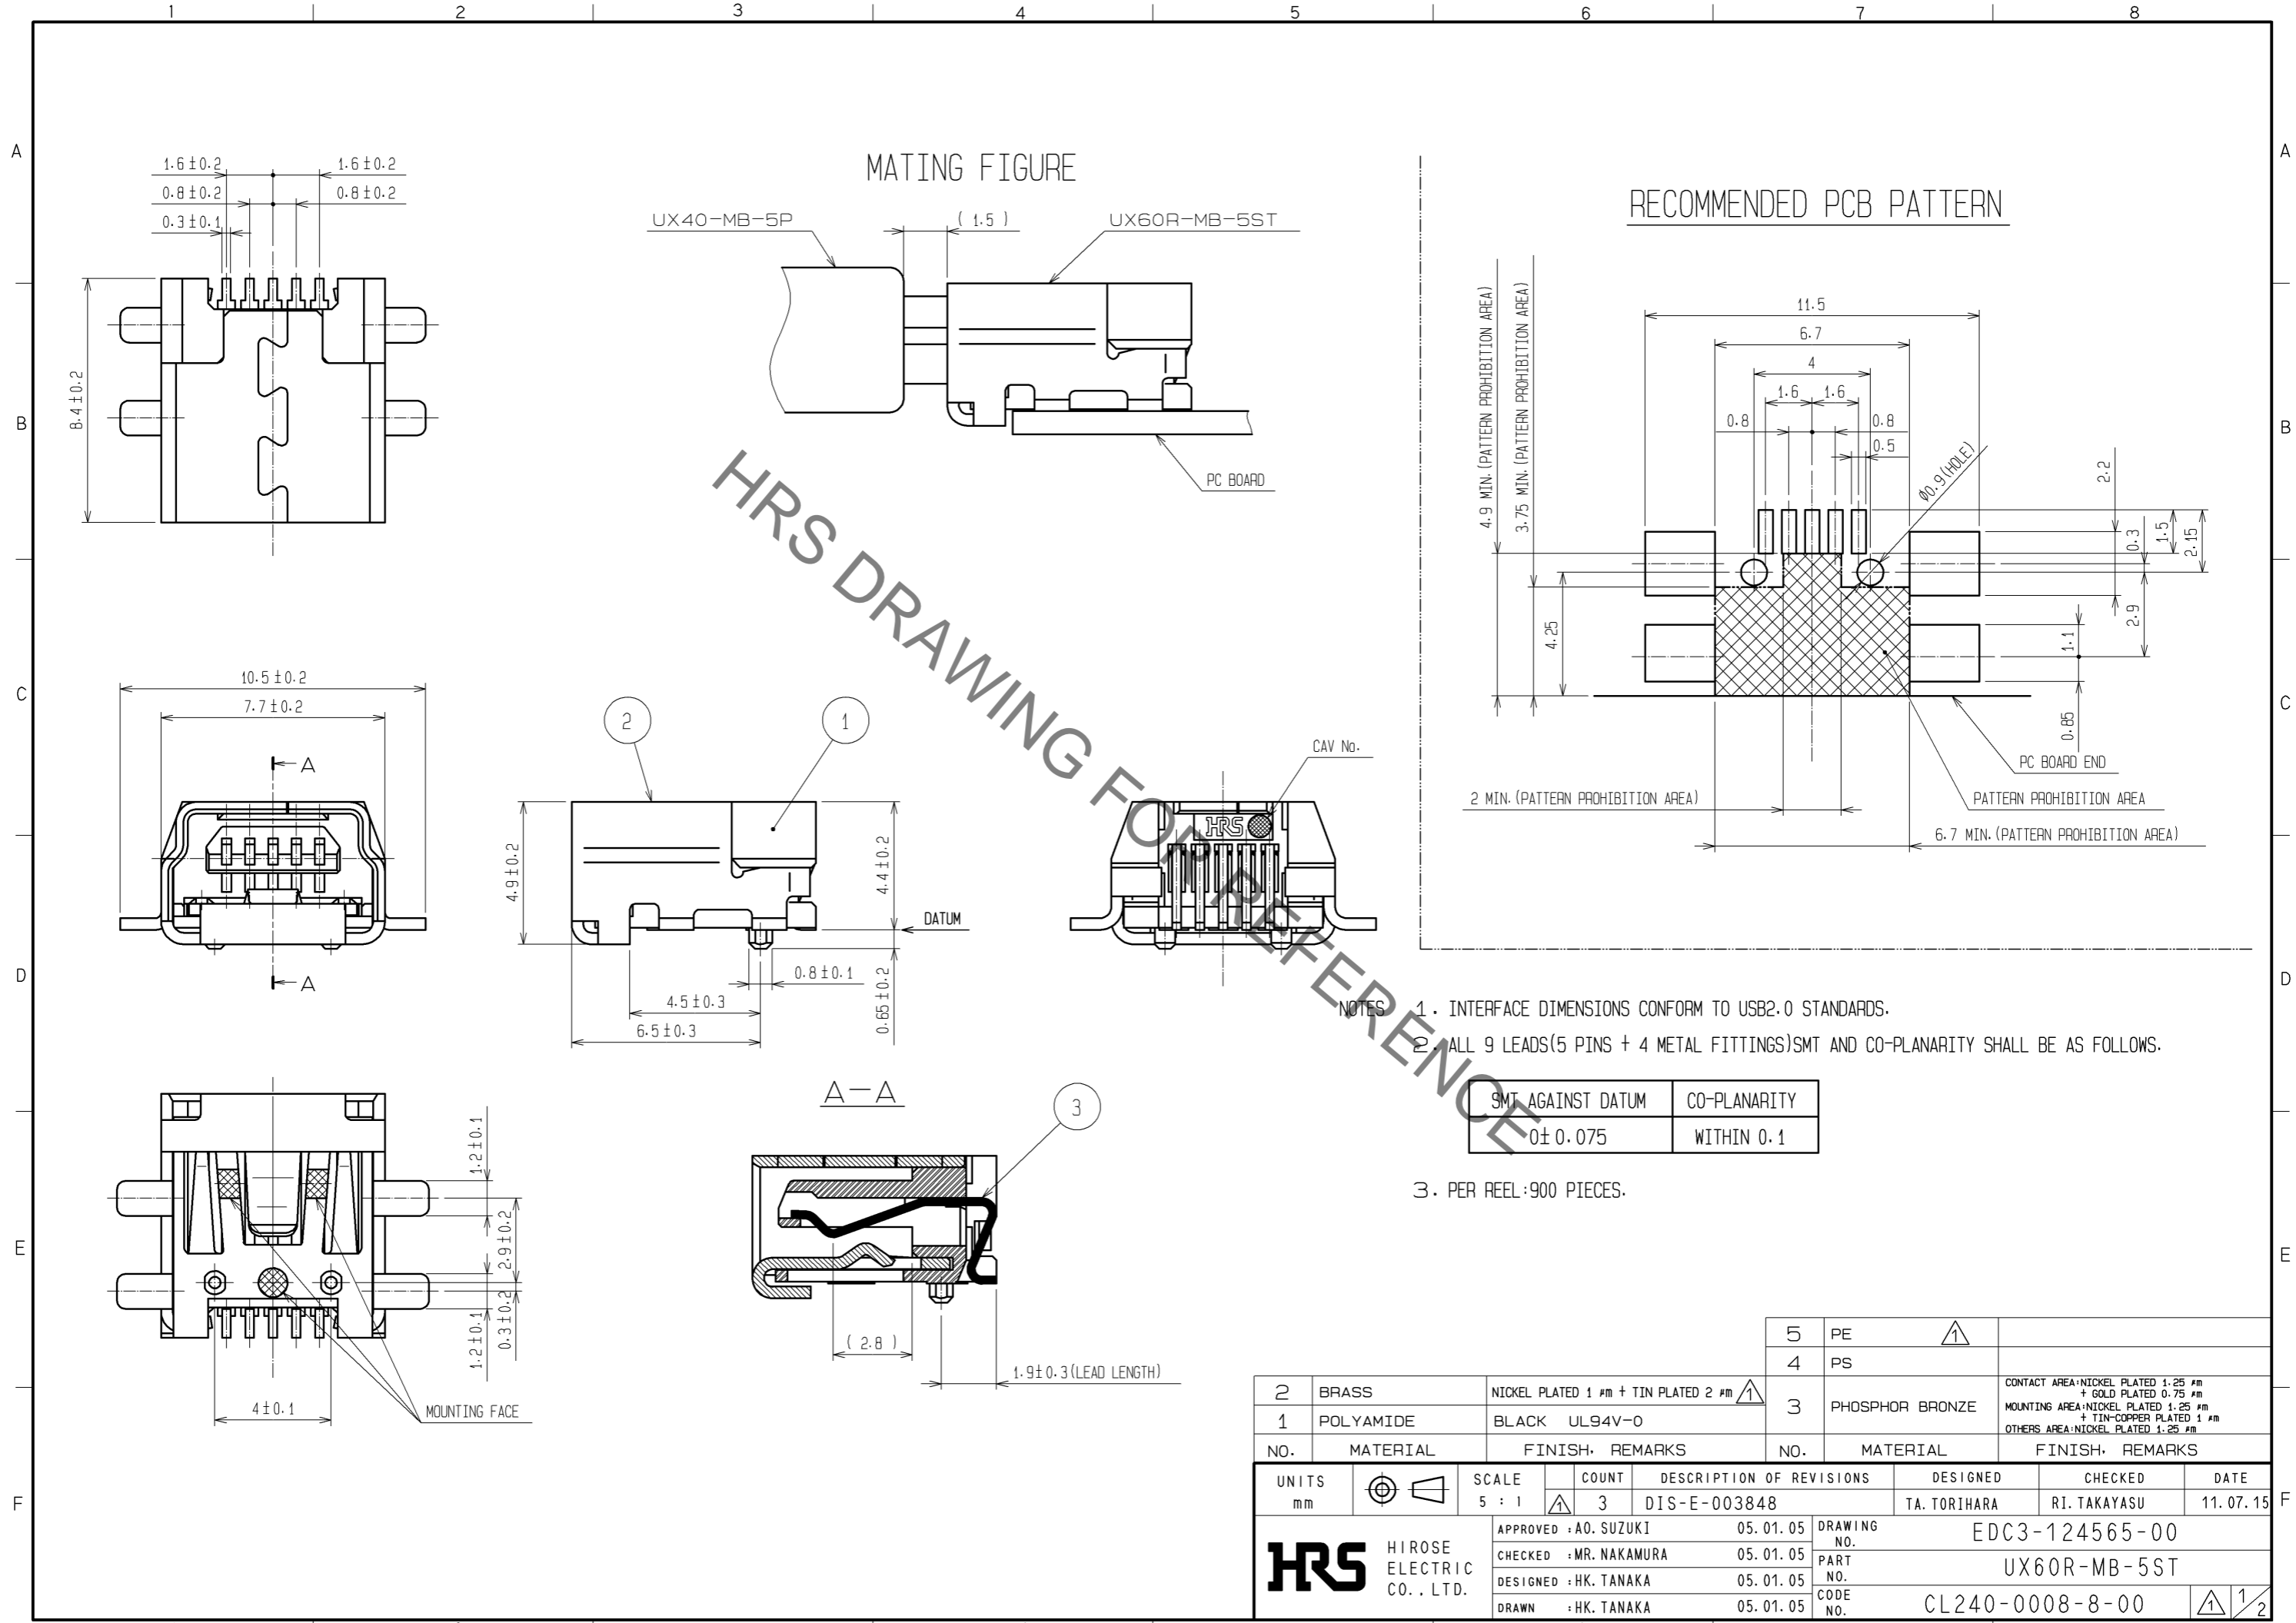

NOTES 1. INTERFACE DIMENSIONS CONFORM TO USB2.0 STANDARDS.
2. ALL 9 LEADS(5 PINS + 4 METAL FITTINGS)SMT AND CO-PLANARITY SHALL BE AS FOLLOWS.

SMT AGAINST DATUM	CO-PLANARITY
0±0.075	WITHIN 0.1

3. PER REEL:900 PIECES.





2	BRASS	NICKEL PLATED 1 μm + TIN PLATED 2 μm	5	PE	△
1	POLYAMIDE	BLACK UL94V-0	4	PS	
			3	PHOSPHOR BRONZE	CONTACT AREA:NICKEL PLATED 1.25 μm + GOLD PLATED 0.75 μm MOUNTING AREA:NICKEL PLATED 1.25 μm + TIN-COPPER PLATED 1 μm OTHERS AREA:NICKEL PLATED 1.25 μm
NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS
UNITS mm		SCALE 5 : 1	COUNT 3	DESCRIPTION OF REVISIONS DIS-E-003848	DESIGNED TA. TORIHARA
HRS	HIROSE ELECTRIC CO., LTD.	APPROVED : A0. SUZUKI	05. 01. 05	DESIGNED EDC3-124565-00	CHECKED RI. TAKAYASU
		CHECKED : MR. NAKAMURA	05. 01. 05	PART NO. UX60R-MB-5ST	DATE 11. 07. 15
		DESIGNED : HK. TANAKA	05. 01. 05	CODE NO. CL240-0008-8-00	
		DRAWN : HK. TANAKA	05. 01. 05		

May.1.2020 Copyright 2020 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.


△ DRAWING FOR PACKING

UNREELING DIRECTION →

PACKAGING CONDITION(FREE)

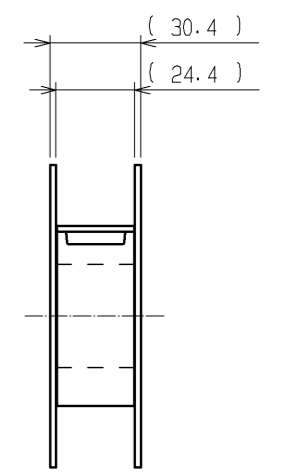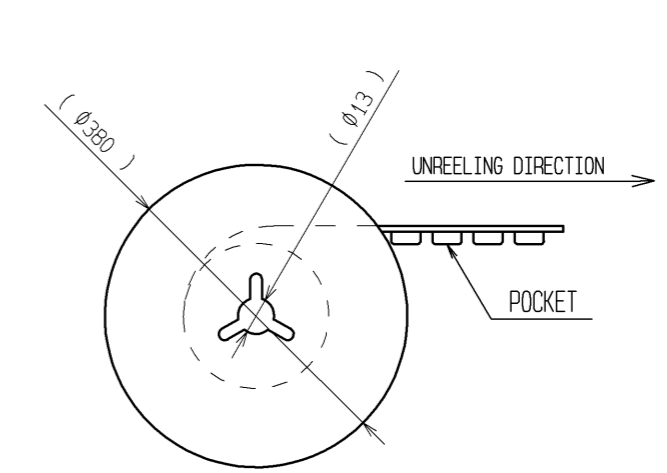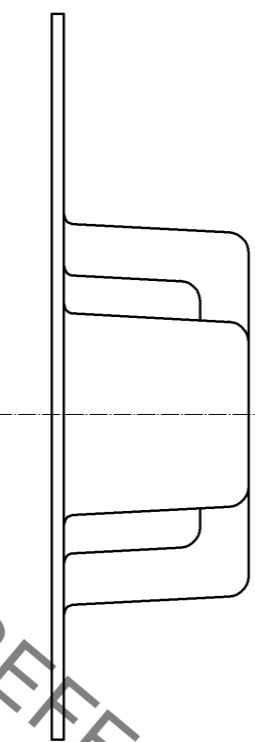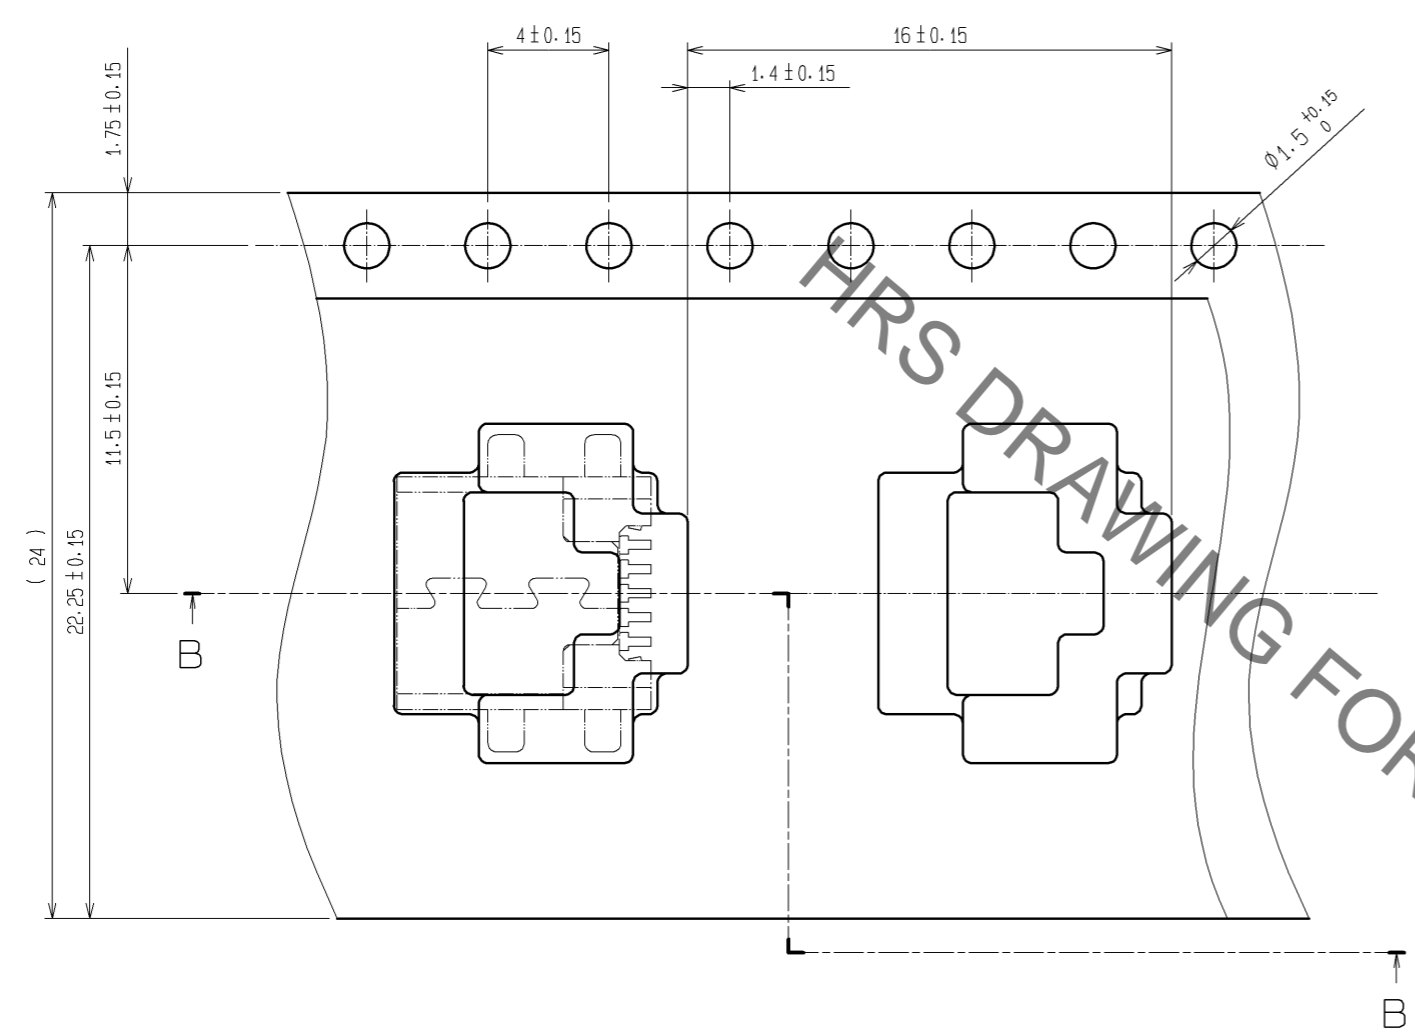

B-B

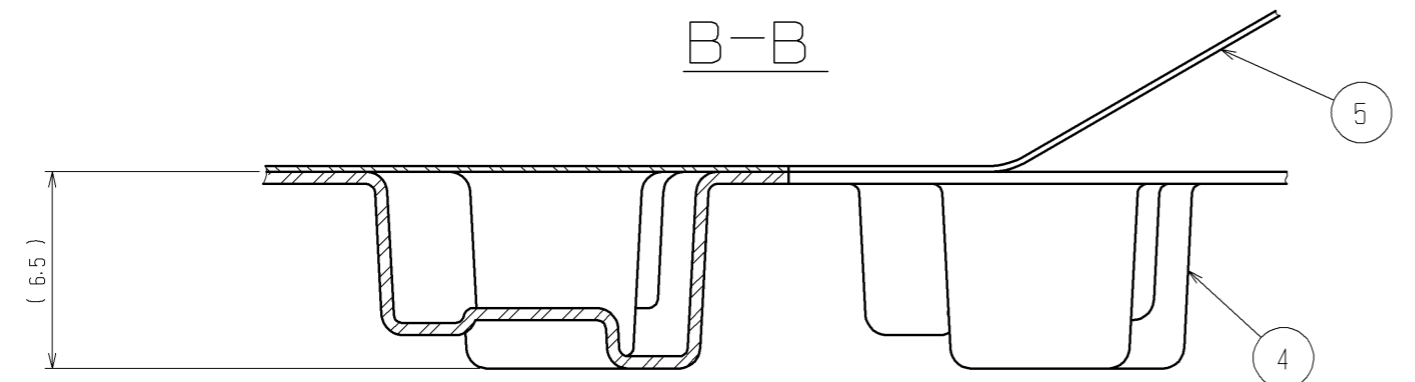

HRS	DRAWING NO.	EDC3-124565-00
	PART NO.	UX60R-MB-5ST
	CODE NO.	CL240-0008-8-00
		△ 2/2