

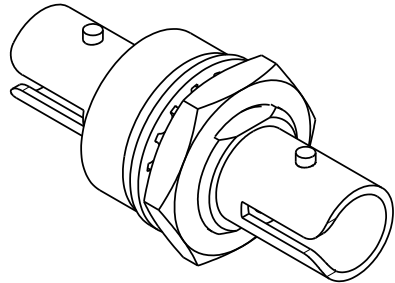
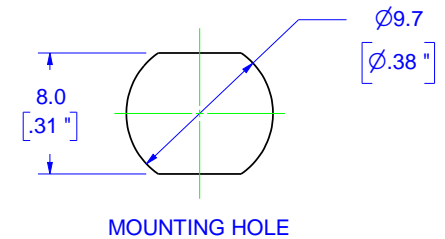


© COPYRIGHT 2013 BY INDUSTRIAL FIBER OPTICS, INC.
ALL RIGHTS RESERVED.

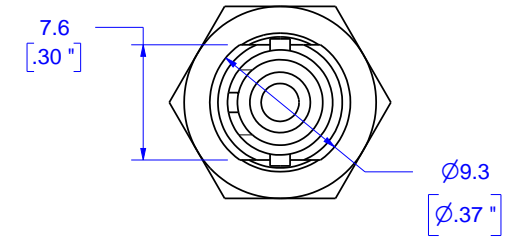

REVISIONS					
REV	DESCRIPTION	ECO	DATE	DWN	APVD
A	Initial release		1/4/2013	BB	AR

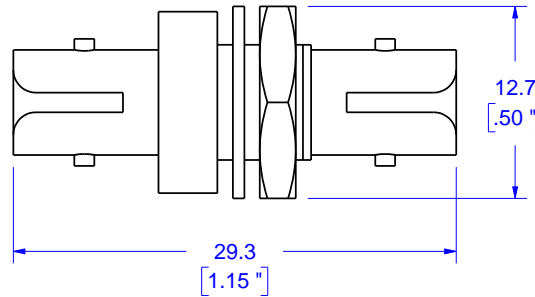


NOTES:

- 20° C to 60° C operating temperature.
- Suitable for mating any multimode ST terminations.
- Nickel plated brass body, washer and nut.
- Phosphor bronze sleeve.
- Polyvinylchloride (PVC) dust caps.
- TIA 604.2 (FOCIS 2) compatible.

INCLUDES HEX NUT, LOCK WASHER AND TWO (2) POLYVINYLCHLORIDE DUST CAPS

UNLESS OTHERWISE SPECIFIED DIMENSIONS MILLIMETERS [IN.]	PRODUCT	Industrial Fiber Optics TEMPE, AZ 85281			
	MATERIAL				
DIMENSIONS ARE FOR REFERENCE ONLY NO TOLERANCES MAY BE IMPLIED FROM THIS DOCUMENT	FINISH	Nickel Plated	NAME		
	DRAWN BY	B. Bidwell	ST Mating Sleeve		
	DATE	1/4/2013			
	CHECKED BY	A. Reyes	SIZE	SCALE	PART NUMBER
	DATE	1/4/2013	A	2:1	IF 820063
				REV	A
		DO NOT SCALE DRAWING		Sheet 1 of 1	



METRIC