


Capacitor, ceramic, 220 pF, +/-5% Tol, 200V, C0G, Lead Spacing=0.2"

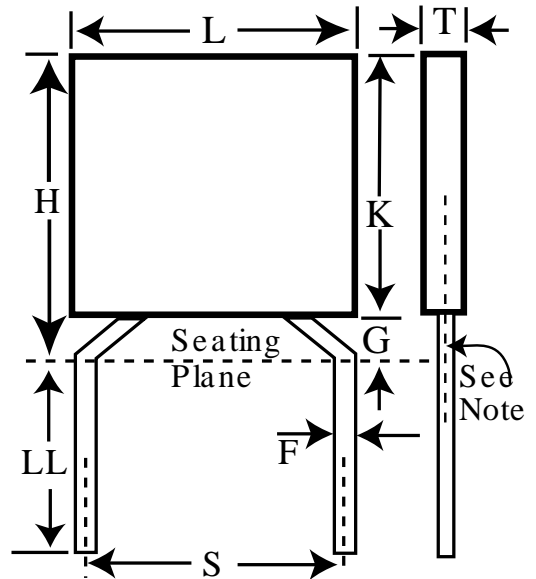

**Dimensions (in)**

**Specifications**

| ID | Dimension | Tolerance     | Manufacturer:            | KEMET          |
|----|-----------|---------------|--------------------------|----------------|
| L  | 0.19      | +/-0.01       | Capacitance:             | 220 pF         |
| H  | 0.19      | +0.01/-0.055  | Lead Spacing:            | 0.2"           |
| S  | 0.2       | +/-0.03       | Voltage:                 | 200V           |
| LL | 1.25      | min           | Temperature Coefficient: | C0G            |
| F  | 0.025     | +0.004/-0.002 | Tolerance:               | +/-5%          |
| K  | 0.025     |               | Body Type:               | Radial Molded  |
| G  | 0.045     | max           | Lead Type:               | Standard Leads |
|    |           |               | Lead Form:               | Hockey Stick   |
|    |           |               | Termination Type:        | Tin            |
|    |           |               | Package Kind:            | Bulk           |
|    |           |               | Package Type:            | Bag            |
|    |           |               | Package Quantity:        | 100            |

Notes:

-Note A: Center line of the leads will be within 0.03 in [0.76 mm] of the center line of the body.

-Lead length shown is for parts supplied in bulk. See packaging specifications for lead lengths when not provided in bulk