


KEMET Part Number: C333C474M1R5TA
(C333C474M1R5TA)

Capacitor, ceramic, 0.47 uF, +/-20% Tol, 100V, X7R, Lead Spacing=0.2"

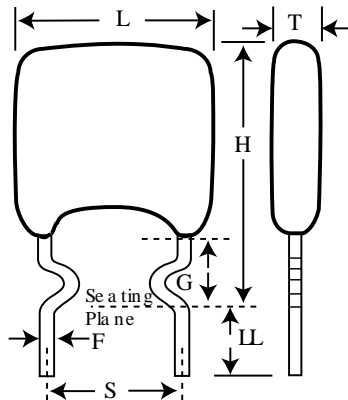

| Dimensions (in) | | |
|-----------------|-----------|---------------|
| Symbol | Dimension | Tolerance |
| L | 0.3 | max |
| H | 0.39 | max |
| T | 0.15 | max |
| S | 0.2 | +/-0.03 |
| LL | 0.276 | min |
| F | 0.02 | +0.004/-0.001 |
| K | 0.02 | |
| G | 0.031 | ref |

Notes:

-Dimension G represents meniscus-free zone above seating plane

-Lead length shown is for parts supplied in bulk. See packaging specifications for lead lengths when not provided in bulk

| General Information | |
|---------------------|-------|
| Manufacturer: | KEMET |

| Electrical Specifications | |
|---------------------------|---------------------------|
| Capacitance: | 0.47 uF |
| Lead Spacing: | 0.2" |
| Voltage: | 100V |
| Temperature Coefficient: | X7R |
| Tolerance: | +/-20% |
| Application: | Commercial Standard |
| Body Type: | Radial Conformal (Dipped) |
| Lead Type: | Standard Leads |
| Lead Form: | Crimped In |
| Termination Type: | Tin |

| Packaging Specifications | |
|--------------------------|------|
| Package Kind: | Bulk |
| Package Type: | Bag |
| Package Quantity: | 250 |