


KEMET Part Number: C350C124J1G5TA7301
(C350C124J1G5TATR)

Ceramic, Commercial Grade, KEMET, GoldMax, 0.12 uF, 5%, 100 V, COG, Lead Spacing = 10.16mm

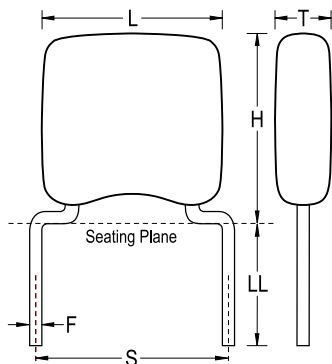

Dimensions

L	8.38mm MAX
H	10.16mm MAX
T	5.08mm MAX
S	10.16mm NOM
LL	7mm MIN
F	0.64mm NOM

Packaging Specifications

Packaging:	T&R, 305mm, H0 = 16mm
Packaging Quantity:	500

General Information

Style:	Radial
Supplier:	KEMET
Series:	GoldMax
Description:	GoldMax, Commercial Standard
RoHS:	Yes
Termination:	Tin
Failure Rate:	N/A

Specifications

Capacitance:	0.12 uF
Capacitance Tolerance:	5%
Voltage DC:	100 VDC
Temperature Range:	-55/+125C
Temperature Coefficient:	COG
Dissipation Factor:	0.1%
Aging Rate:	0% Loss/Decade Hour
Insulation Resistance:	8.33 GOhms
Dielectric Strength:	250 V